


FACP Battery Calculation					4/20/2016
PROJECT NAME: 93 ST LAWRENCE					
Required Standby Time: 24 Hours					
Required Alarm Time: 3 Minutes					
Regulated Load in Standby					
Device Type	Number of Devices	Current (Amps)	Current (Amps)	Total Current (Amps)	
FACP - MS-9200ULS MAIN CIRCUIT BOARD	1	X	0.14500	=	0.14500
ANN-80 - REMOTE ANNUNCIATOR	1	X	0.04000	=	0.04000
SMK-300 - SMOKE DETECTOR	3	X	0.00040	=	0.00120
MAC-300 - MONITOR MODULE	3	X	0.00040	=	0.00120
BC-12LX - PULL STATION	4	X	0.00030	=	0.00120
TOTAL STANDBY LOAD					0.16480
Regulated Load in Alarm					
Device Type	Number of Devices	Current (Amps)	Current (Amps)	Total Current (Amps)	
FACP - MS-9200ULS MAIN CIRCUIT BOARD	1	X	0.27500	=	0.27500
ANN-80 - REMOTE ANNUNCIATOR	1	X	0.04000	=	0.04000
MAX ALARM DRAW - ALL ADDRESS DEVICES	1	X	0.40000	=	0.40000
MAC-1 (See Voltage Drop Calculations)	1	X	0.49300	=	0.49300
MAC-2 (See Voltage Drop Calculations)	1	X	0.90700	=	0.90700
MAC-3 (See Voltage Drop Calculations)	1	X	0.41400	=	0.41400
MAC-4 (See Voltage Drop Calculations)	1	X	0.24500	=	0.24500
TOTAL ALARM LOAD					2.77400
Battery Requirements					
Standby Load Current (Amps)	0.16480	X	24.00000	=	3.95220
Alarm Load Current (Amps)	2.77400	X	0.08333	=	0.23117
Derating Factor					4.18637
TOTAL AMPERE HOURS REQUIRED					5:02:284
BATTERIES TO BE PROVIDED (2 - 12v)					7 AH


Point to Point NAC Voltage Drop Calculation					4/20/2016
Project Name: 93 ST LAWRENCE					
Circuit Number: MAC-1					
Nominal System Voltage: 20.4 volts					
Minimum Device Voltage: 16.0 volts					
Distance from source to 1st device: 25 feet					
Wire Gauge for balance of circuit: 14					
Max Output Current: 1.50 amps					
Total Circuit Current: 0.493 amps					
End of Line Voltage: 20.26 volts					
Circuit is within limits					
Device	Current	Voltage at Device	Drop from source	Percent Drop	
Device 1	0.079	20.32	0.076	0.37%	
Device 2	0.138	20.29	0.111	0.53%	
Device 3	0.138	20.26	0.140	0.69%	
Device 4	0.138	20.26	0.144	0.71%	
Totals:					
Max Output Current	0.493	61			
Total Circuit Current	0.493				
End of Line Voltage	20.26				
Notes:					
Wire resistance is doubled in the calculations for two wires (Positive and Negative). The voltage calculated to the last device must not be lower than the manufactures listed minimum operating voltage (E: rated operating voltage 16-33 VDC (24 VDC nominal)).					

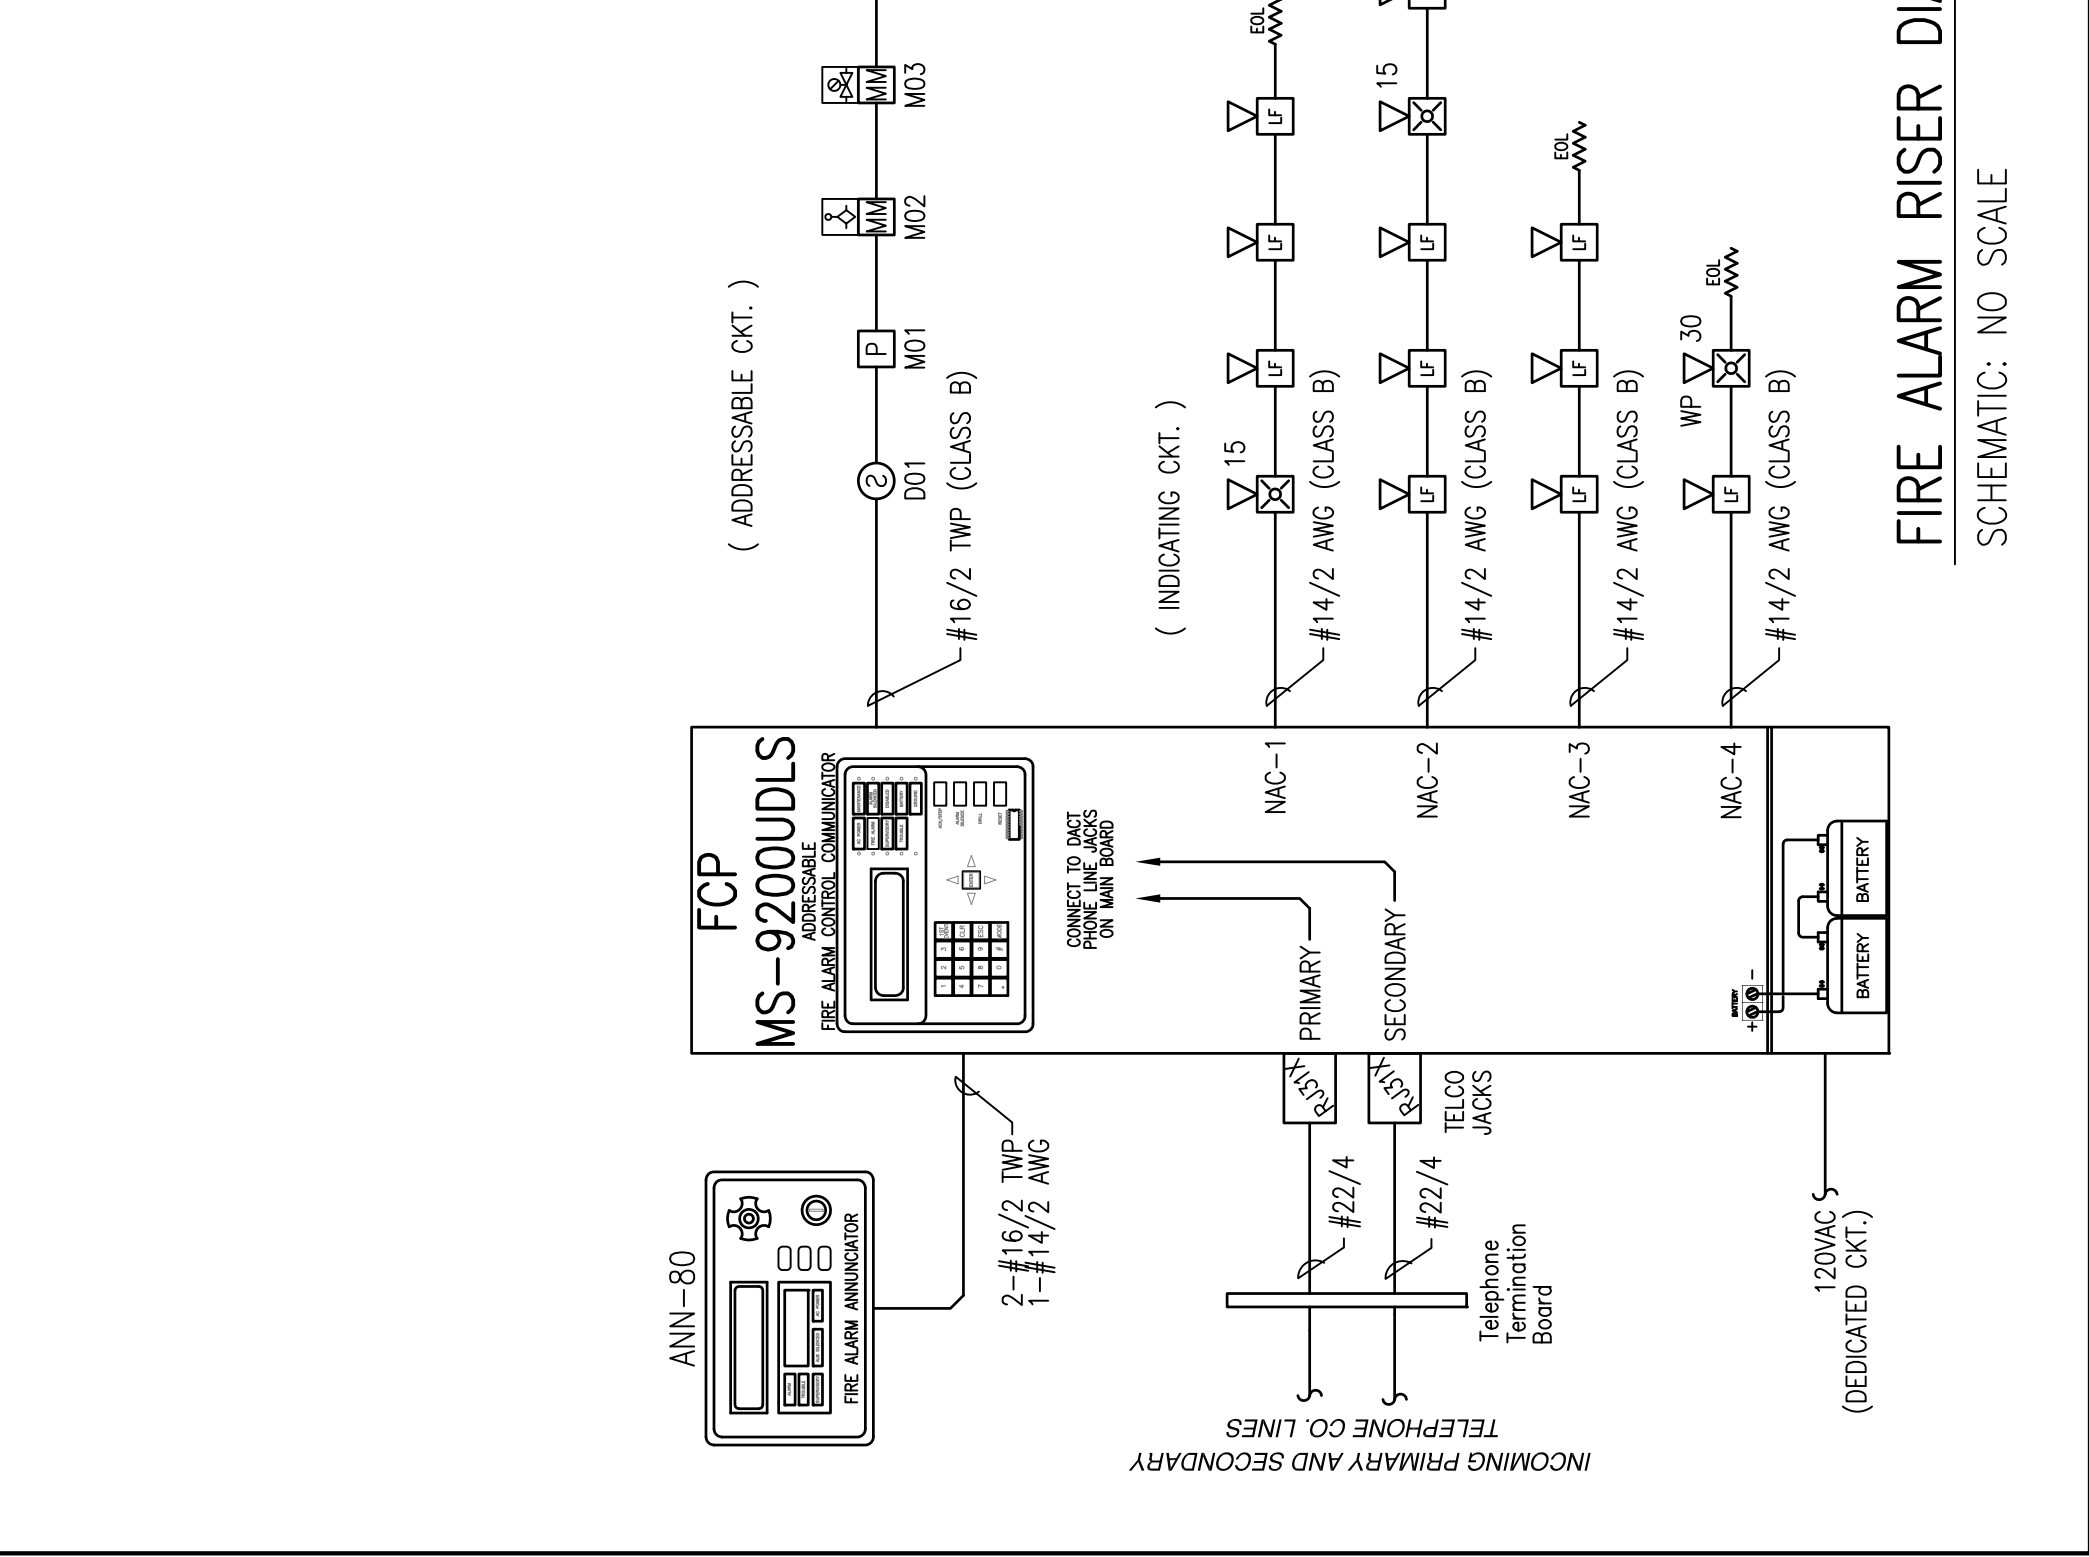

Point to Point NAC Voltage Drop Calculation					4/20/2016
Project Name: 93 ST LAWRENCE					
Circuit Number: MAC-2					
Nominal System Voltage: 20.4 volts					
Minimum Device Voltage: 16.0 volts					
Distance from source to 1st device: 25 feet					
Wire Gauge for balance of circuit: 14					
Max Output Current: 1.50 amps					
Total Circuit Current: 0.907 amps					
End of Line Voltage: 19.98 volts					
Circuit is within limits					
Device	Current	Voltage at Device	Drop from source	Percent Drop	
Device 1	0.138	20.26	0.139	0.68%	
Device 2	0.138	20.14	0.184	1.38%	
Device 3	0.138	20.02	0.156	1.65%	
Device 4	0.138	20.02	0.182	1.87%	
Device 5	0.138	19.99	0.405	1.98%	
Device 6	0.138	19.98	0.421	2.06%	
Totals:					
Max Output Current	0.907	124			
Total Circuit Current	0.907				
End of Line Voltage	19.98				
Notes:					
Wire resistance is doubled in the calculations for two wires (Positive and Negative). The voltage calculated to the last device must not be lower than the manufactures listed minimum operating voltage (E: rated operating voltage 16-33 VDC (24 VDC nominal)).					

Point to Point NAC Voltage Drop Calculation					4/20/2016
Project Name: 93 ST LAWRENCE					
Circuit Number: MAC-3					
Nominal System Voltage: 20.4 volts					
Minimum Device Voltage: 16.0 volts					
Distance from source to 1st device: 35 feet					
Wire Gauge for balance of circuit: 14					
Max Output Current: 1.50 amps					
Total Circuit Current: 0.414 amps					
End of Line Voltage: 20.25 volts					
Circuit is within limits					
Device	Current	Voltage at Device	Drop from source	Percent Drop	
Device 1	0.138	20.31	0.089	0.44%	
Device 2	0.138	20.28	0.125	0.61%	
Device 3	0.138	20.25	0.152	0.74%	
Totals:					
Max Output Current	0.414	88			
Total Circuit Current	0.414				
End of Line Voltage	20.25				
Notes:					
Wire resistance is doubled in the calculations for two wires (Positive and Negative). The voltage calculated to the last device must not be lower than the manufactures listed minimum operating voltage (E: rated operating voltage 16-33 VDC (24 VDC nominal)).					

Point to Point NAC Voltage Drop Calculation					4/20/2016
Project Name: 93 ST LAWRENCE					
Circuit Number: MAC-4					
Nominal System Voltage: 20.4 volts					
Minimum Device Voltage: 16.0 volts					
Distance from source to 1st device: 60 feet					
Wire Gauge for balance of circuit: 14					
Max Output Current: 1.50 amps					
Total Circuit Current: 0.245 amps					
End of Line Voltage: 20.29 volts					
Circuit is within limits					
Device	Current	Voltage at Device	Drop from source	Percent Drop	
Device 1	0.138	20.31	0.090	0.44%	
Device 2	0.107	24	0.106	0.52%	
Totals:					
Max Output Current	0.245	84			
Total Circuit Current	0.245				
End of Line Voltage	20.29				
Notes:					
Wire resistance is doubled in the calculations for two wires (Positive and Negative). The voltage calculated to the last device must not be lower than the manufactures listed minimum operating voltage (E: rated operating voltage 16-33 VDC (24 VDC nominal)).					

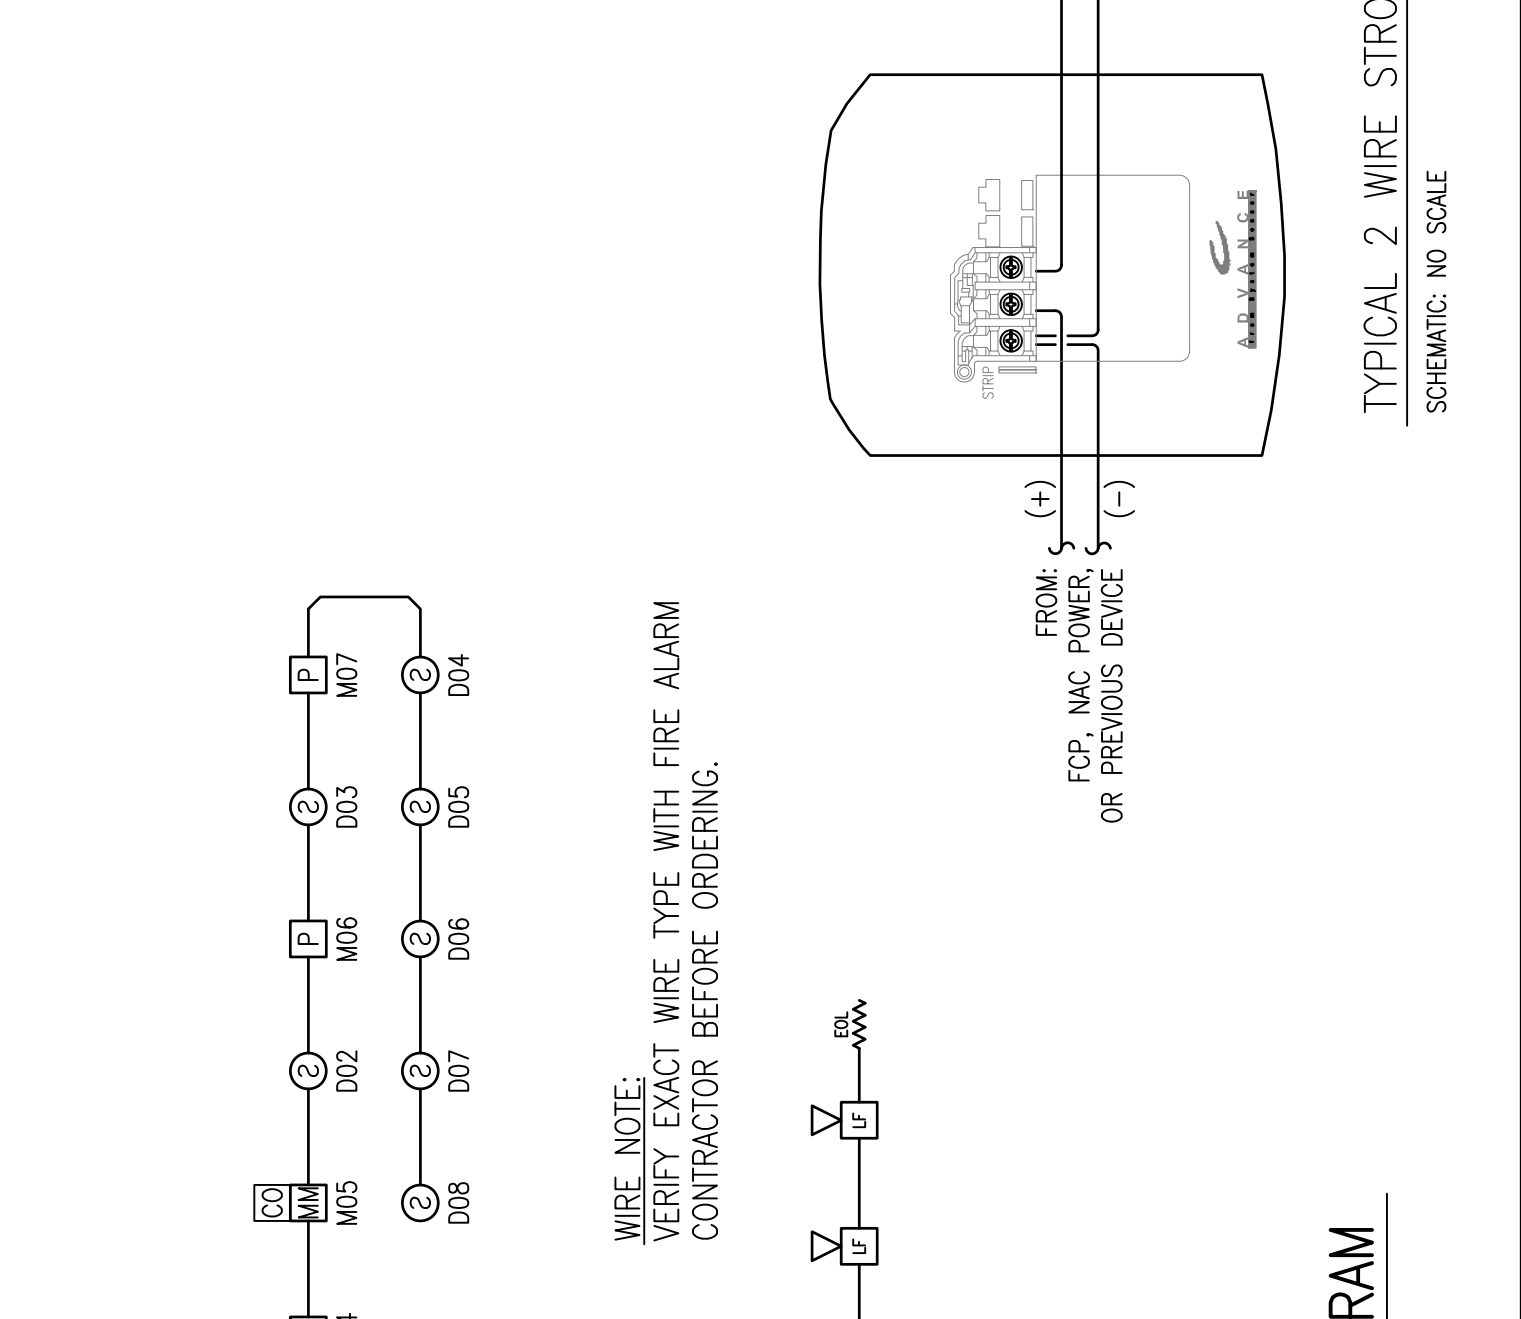

- GENERAL NOTES:**
- THESE DRAWINGS ARE DIAGRAMMATIC. REFER TO THE ARCHITECTURAL DRAWINGS FOR EXACT DIMENSIONS.
 - INSTALLATION SHALL COMPLY WITH NEC, NFPA 72 AND ALL OTHER APPLICABLE CODES AS REQUIRED BY THE LOCAL AUTHORITY HAVING JURISDICTION.
 - WIRING DEPICTED ON THESE PLANS IS SCHEMATIC - ACTUAL WIRE LOCATIONS MAY DIFFER FROM THESE PLANS. WIRING SHALL BE PERFORMED AS ACTUAL BUILDING CONSTRUCTION CONDITIONS ALLOW AND TO MINIMIZE PENETRATIONS THROUGH AREA SEPARATION WALLS AND FIRE WALLS. THE USE OF A RACEWAY IS PERMITTED AS LONG AS NO 110V OR HIGHER VOLTAGE CABLES ARE IN THE SAME RACEWAY.
 - FIRE RATINGS SHALL BE MAINTAINED FOR ALL PENETRATIONS THROUGH FIRE-RATED CONSTRUCTION.
 - POWER FOR ALL FIRE ALARM PANELS AND FIRE ALARM POWER SUPPLIES MUST BE PROVIDED BY A DEDICATED AC BRANCH CIRCUIT.
 - POWER-LIMITED AND NONPOWER-LIMITED CIRCUIT WIRING MUST REMAIN SEPARATED IN CABINET. ALL POWER-LIMITED CIRCUIT WIRING MUST REMAIN AT LEAST 0.25" AWAY FROM ANY NONPOWER-LIMITED CIRCUIT WIRING. FURTHERMORE, ALL POWER-LIMITED AND NONPOWER-LIMITED CIRCUIT WIRING MUST ENTER AND EXIT THE CABINET THROUGH DIFFERENT KNOCK OUTS AND/OR SEPARATE CONDUITS.
 - WHEN UTILIZING CLASS "A" CIRCUITS, SEPARATE OUTGOING AND RETURN CONDUCTORS OF RUSH "A" CIRCUITS BY A MINIMUM OF 12" WHERE RUN VERTICALLY AND 48" WHERE RUN HORIZONTALLY.
 - WHEN UTILIZING SHIELDED CABLE TIE SHIELDS THROUGH AND INSULATE AT EACH JUNCTION BOX. INSULATE AND TAPE BACK AT END.
 - ALL FIRE ALARM CABLING SHALL BE ACCEPTABLE TO THE FIRE ALARM EQUIPMENT MANUFACTURER FOR THE INTENDED PURPOSE.
 - SMOKE DETECTORS SHALL NOT BE INSTALLED UNTIL AFTER CONSTRUCTION CLEAN-UP IS COMPLETED AND FINAL.
 - LOCATE SMOKE DETECTORS A MINIMUM OF THREE (3) FEET FROM MECHANICAL DIFFUSERS. WALL-MOUNTED SMOKE DETECTORS SHALL BE LOCATED A MINIMUM OF 4" AND A MAXIMUM OF 12" FROM CEILING. CEILING-MOUNTED SMOKE DETECTORS SHALL BE MOUNTED ON CEILINGS AND NOT ON THE BOTTOMS OF BEAMS OR JOISTS.
 - PROVIDE SYNCHRONIZATION OF ALL VISUAL NOTIFICATION APPLIANCE CIRCUITS. PROVIDE ALL REQUIRED SYNC MODULES. PROVIDE A MULTI-SYNC MODE SLAVE CONNECTION BETWEEN ALL SYNC MODULES.
 - VERIFY ALL FIELD SELECTABLE AUDIBILITY SETTINGS OF NOTIFICATION APPLIANCES WITH FIRE ALARM CONTRACTOR.
 - UPON COMPLETION OF THE FIRE ALARM SYSTEM INSTALLATION AND PROGRAMMING, THE INSTALLING CONTRACTOR SHALL PERFORM FINAL TESTING OF THE ENTIRE SYSTEM, PER ALL APPLICABLE CODES, AND SHALL COORDINATE AND PERFORM A FINAL FIRE ALARM SYSTEM INSPECTION.
 - PROVIDE OFF-SITE MONITORING AS REQUIRED BY THE INTERNATIONAL FIRE CODE, SECTION 907.15 AND THE LOCAL AUTHORITY HAVING JURISDICTION.
 - INSTALLING CONTRACTOR SHALL, PHYSICALLY, LABEL ALL INITIATING DEVICES AND NOTIFICATION APPLIANCE CIRCUIT END OF LINE (WHEN WIRING CLASS 'B'). THESE LABELS SHALL BE IN PLACE PRIOR TO START-UP AND TESTING.

FIRE ALARM SYMBOL LEGEND		
SYMBOL	DESCRIPTION	MOUNTING
FACP	FIRE ALARM CONTROL PANEL	WALL-TOP @ 66"
FPS	FIRE ALARM POWER SUPPLY	FIELD VERIFY
FSA	FIRE SYSTEM ANNUNCIATOR	WALL-TOP @ 66"
CD	CARBON MONOXIDE DETECTOR	FIELD VERIFY
SD	SMOKE DETECTOR	CEILING
SD	DUCT SMOKE DETECTOR	BY OTHERS
HD	HEAT DETECTOR	CEILING
M	ADDRESSABLE MONITOR MODULE	FIELD VERIFY
MM	ADDRESSABLE MINI MONITOR MODULE	FIELD VERIFY
P	MANUAL PULL STATION	WALL @ 48"
R	CONTROL RELAY (MULTI-VOLTAGE)	FIELD VERIFY
RM	ADDRESSABLE RELAY MODULE	FIELD VERIFY
DL	MAGNETIC DOOR HOLDER	FIELD VERIFY
WF	WATER FLOW SWITCH	BY OTHERS
VS	VALVE TAMPER SWITCH	BY OTHERS
B	BELL	BY OTHERS
CS	CEILING MOUNT STROBE	FIELD VERIFY
CH	CEILING MOUNT HORN / STROBE	FIELD VERIFY
CS	CEILING MOUNT SPEAKER / STROBE	FIELD VERIFY
HF	HORN, LOW FREQUENCY	WALL @ 10'-0"
HS	HORN / STROBE	WALL 80"-96"
SP	SPEAKER / STROBE	WALL 80"-96"
SP	SPEAKER	WALL @ 90"
KB	KNOX BOX	WALL 80"-96"
ABBREVIATION		
E	EXISTING	
G	WITH GUARD	
P	PENDENT MOUNT	
R	RESIDENTIAL (110V)	
S	SOUNDER BASE	
WP	WEATHER PROOF	
EOL	END OF LINE RESISTOR	
EOL	END OF LINE RELAY	
AWG	AMERICAN WIRE GAUGE	
TWP	TWISTED PAIR	
FPLP	FIRE POWER LIMITED PLENUM	
FPLR	FIRE POWER LIMITED RISER	

REVISION	DESCRIPTION	DATE
0	ISSUED FOR REVIEW & APPROVAL	4/21/2016

CUNNINGHAM
Security Systems

10 Princes Point Road, Yarmouth, Maine 04096
Office: 207.846.3350 • Fax: 207.846.6080

4 UNIT APARTMENT BUILDING
93 ST. LAWRENCE STREET
PORTLAND, MAINE 04101
CALCS, DETAILS, LEGEND, MATRIX, NOTES, RISER

UNICAD Inc.
100 Exchange Street, Suite 200
Portland, ME 04101
www.unicad.net

JPB UNICAD JOB #16252
CHECKED WAYNE B. HANS
DATE 4/21/2016
REVISION 0
SCALE NONE
FA-1

OPERATIONS MATRIX	
FIRE ALARM OUTPUT	ACTIVATE ALARM INDICATOR
FIRE ALARM INPUT	ACTIVATE AUDIBLE ALARM
SMOKE DETECTORS	ACTIVATE TROUBLE INDICATOR
CARBON MONOXIDE DETECTORS	ACTIVATE TROUBLE SUPERVISORY SIGNAL
PULL STATIONS	ACTIVATE AUDIBLE TROUBLE INDICATOR
WATERFLOW SWITCHES	ACTIVATE TROUBLE SUPERVISORY SIGNAL
VALVE TAMPER SWITCHES	ACTIVATE TROUBLE SUPERVISORY SIGNAL
FIRE ALARM AC POWER FAIL	ACTIVATE TROUBLE SUPERVISORY SIGNAL
FIRE ALARM LOW BATTERY	ACTIVATE TROUBLE SUPERVISORY SIGNAL
OPEN CIRCUIT	ACTIVATE TROUBLE SUPERVISORY SIGNAL
GROUND FAULT	ACTIVATE TROUBLE SUPERVISORY SIGNAL
NAC SHORT CIRCUIT	ACTIVATE TROUBLE SUPERVISORY SIGNAL
LOSS OF AC TO BUILDING	ACTIVATE TROUBLE SUPERVISORY SIGNAL

