

Vent-Free Technology

At 99.9-percent efficient, a vent-free system makes the ultimate supplemental heat source for any home. The clean-burning technology employs oxygen depletion sensor technology to continuously monitor your room air and instantly shut off the gas well before the oxygen drops to an unsafe level. For more information – including reports of the safety and efficiency of vent-free technology – please visit ventfree.org.

Cast Iron Stove Shelf Kits

(fit compact and medium stoves, includes left and right shelf)


CSK-B	Porcelain Black
CSK-F	Matte Black
CSK-M	Porcelain Mahogany
CSK-S	Porcelain Sand
CSK-W	Matte Pewter

Accessories

CIB-3	Automatic, Variable Speed Blower. Fits Medium Cast Iron Stove.
CIB-4	Automatic, Variable Speed Blower. Fits Compact Cast Iron Stove.

Control Options

FRBC	Battery Operated Remote Control
FRBTC	Battery Operated Remote Control with Thermostat
FREC	Electric Remote
FWS-1	On/Off Wall Switch
TMV	Wall Thermostat - Reed Switch
TRW	Wall Thermostat - Wireless Remote
RKVN	Converts Manual Variable to Remote Variable (Natural)
RKVP	Converts Manual Variable to Remote Variable (LP)

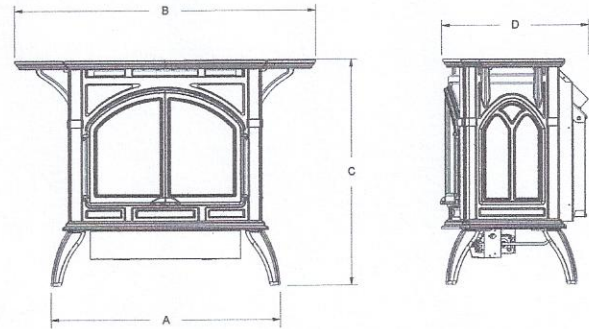

Model	A	B	C	D
VFD-20-CC	21 1/2	32 3/4	24 1/8	15 3/8
VFD-30-CC	28 1/16	37	27 3/4	17 1/8

Clearance to Combustible Materials

Side Wall	6 in.	Adjacent Corner Wall	4 in.
Back Wall	2 in.	Ceiling	36 in.

Gas Inlet

Type of Gas (State on Order)	Natural or LP
Iron Pipe Size (N.P.T.)	3/8-inch
Ignition System	Millivolt (Standing Pilot/Piezo) or Intermittent Pilot

Warranty

All vent-free parts carry a 5-year limited labor warranty.

Note: Empire Comfort Systems is committed to continuous product improvement; specifications are subject to change without notice. Flame size, shape and color will vary from photos.

Member of the following industry associations:



This appliance is design-certified to the ANSI standard by:



SINCE 1932

918 Freeburg Ave.

Belleville, IL 62220-2623

E-mail: info@empirecomfort.com

ECS-00805 4/01/14