

PROJECT NORTH

NOTE


1. FIN. FL. 10'-0" UNG.
2. CONSTRUCTION JOINT
3. SAUCUT JOINT
4. SCREED KEY
5. 4" CONC. SLAB
6. 5" CONC. SLAB FOR RADIANT HEAT, COORD. RADIANT HEAT TUBING W/ MECH. DUCTS.
7. THICKENED CONC. SLAB @ CMU WALLS
8. RECESSED CONC. SLAB
9. CONSTRUCTION JOINTS AND SCREED KEY JOINTS FOR SCREED KEY JOINTS IN PARKING GARAGE SLAB, INST. ALL OTHER JOINTS MAY BE SAUCUT JOINTS OR CONSTRUCTION JOINTS AT CONTRACTOR'S OPTION SUBJECT TO APPROVAL OF THE ENGINEER.
10. SCREED KEY JOINTS: INSTALL SCREED KEY ALONG JOINT TO BE KEPT OPEN TO PERMIT FIBERGLASS REINFORCING FOR SCREED KEY JOINTS IN PARKING GARAGE SLAB. INST. ALL OTHER JOINTS IN GARAGE SLAB AS SAUCUT JOINTS IMMEDIATELY BESIDE COLUMN PIERS, ETC. USE NO. 6@8" REINFORCEMENT PLACING CAGE TO BE KEPT OPEN FOR SEALANT. DO NOT BURY CAP WHERE STAKES FOR SCREED KEY PENETRATE VAPOR RETARDER SEAL WITH TAPE AS RECOMMENDED BY THE MANUFACTURER.

COORDINATE LOCATIONS OF ALL THICKENED SLABS UNDER CHASES, UNDER MECH. DUCTS, UNDER CMU WALLS, AND UNDER CMU WALLS. NOT ALL THICKENED SLABS ARE SHOWN ON THIS DRAWING.

NOTE: IF CONTRACTOR CHOOSES TO BOND OUT ADDITIONAL REINFORCING TO DRAINS, ETC. ADDITIONAL CONSTRUCTION SCREED KEY AND/OR CONTROL JOINTS MAY BE INSTALLED. PROVIDE AN ALLOWANCE FOR THESE ADDITIONAL JOINTS.

NOTE: ALL EXTERIOR SLAB CONTROL JOINTS WITH SEALANT

NOTE: ALL EXTERIOR SLAB CONTROL JOINTS WITH SEALANT

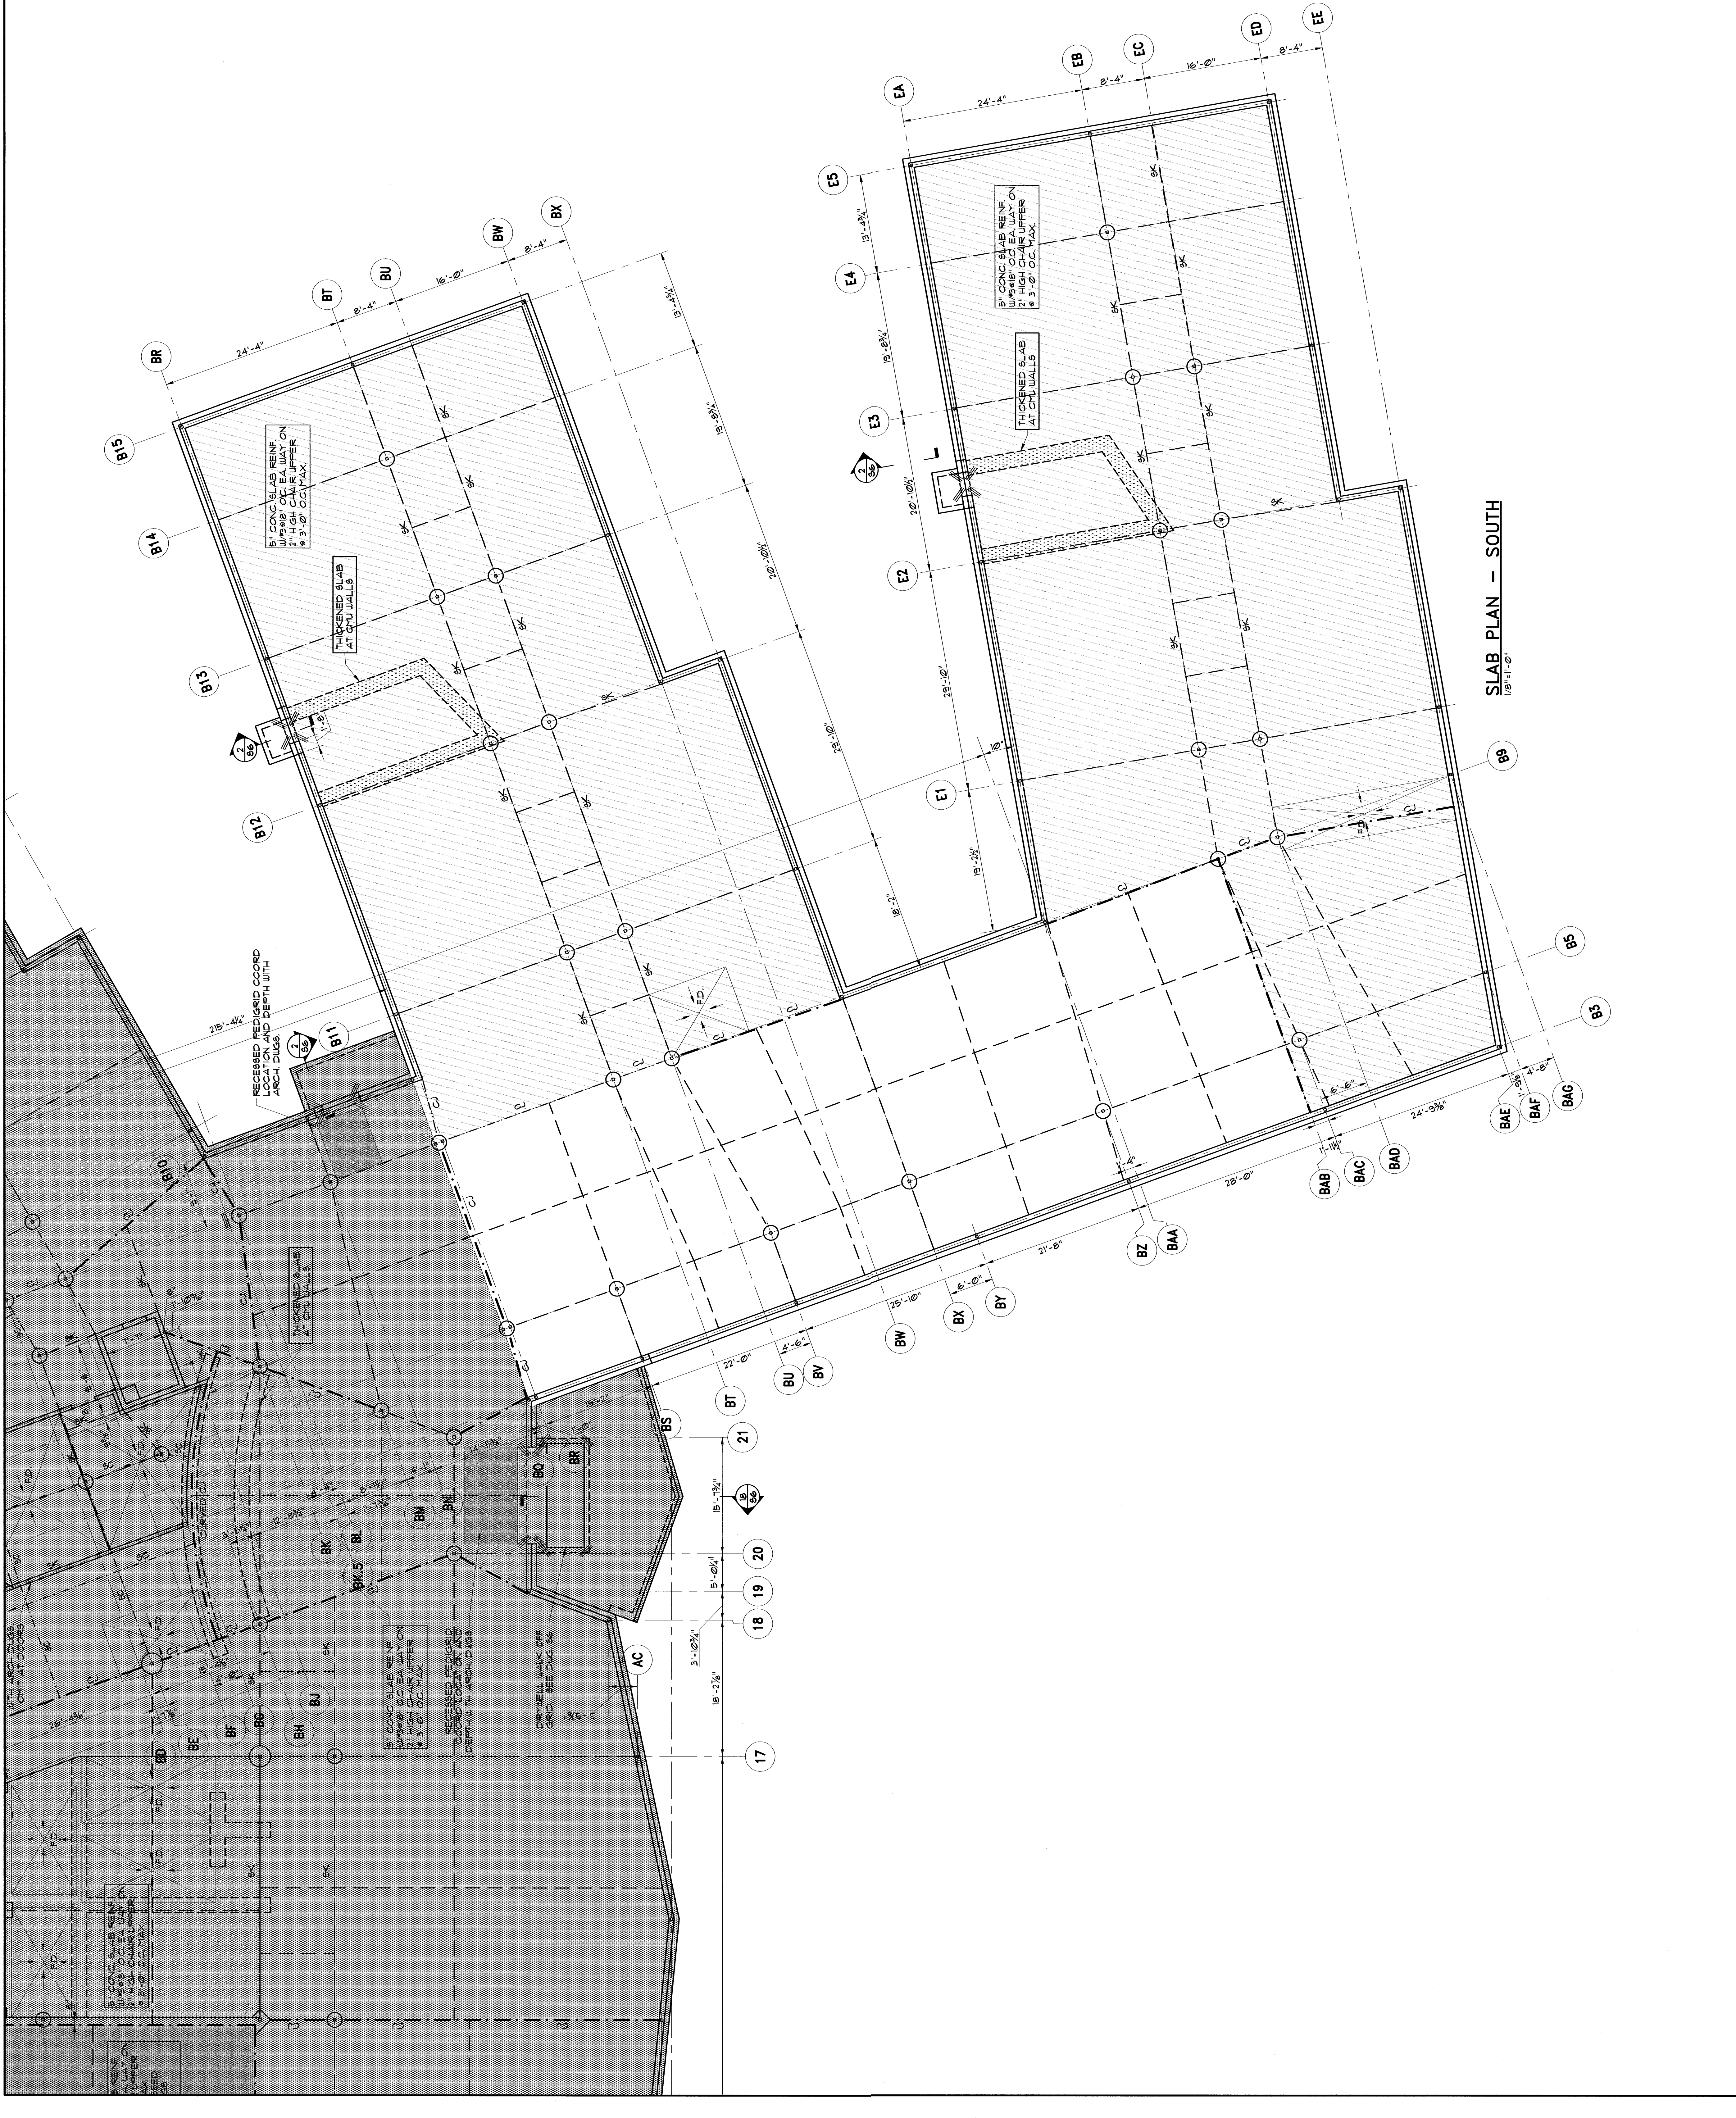

SLAB PLAN - SOUTH
1/8" = 1'-0"

	East End Elementary School Portland, Maine	Job No.: 0309 Date: July 15, 2004 Scale: AS NOTED Prepared by: [Redacted] Checked by: [Redacted] Drawing Title: Slab Plan South	<h1>S.4</h1>
	Consultants DeLuch-Hoffman Associates Civil Engineer Landscape Architect Carroll Associates Structural Engineer Prinkham & Greer Mechanical Engineer Bennett Engineering Electrical Engineer Robert D. Smith Brian Dudgeon TJM Consulting Green Consultant Fore Solutions		