

Portland Food Co-op

Portland, ME

Fire Alarm System
Equipment Submittal
09/17/14



20 Thomas Drive
Westbrook, ME 04092-3824

**Project: Portland Food Co-op
290 Congress Street
Portland, ME 04101**

**Customer: Roman Catholic Bishop
510 Ocean Avenue
Portland, ME 04101-0000**

Sales Representative: Kenneth Plourde

**FIRE ALARM SYSTEM
EQUIPMENT SUBMITTAL**

Please contact the SimplexGrinnell Service Department **TWO WEEKS IN ADVANCE** to schedule a technician for checkout.

SimplexGrinnell District Contact Information:

District Manager: Allen Paul

SimplexGrinnell
20 Thomas Drive
Westbrook, ME 04092

Sales: 207-842-6440
Service: 207-842-6440
Fax: 207-842-6439

Prepared by:

SimplexGrinnell
Engineering Support Services
50 Technology Drive
Westminster, MA 01441

Project Engineer: Steven C. Kalafarski
NICET # 77524

Submittal Approval:

Approved By: _____

Date: _____

PORTLAND FOOD CO-OP FIRE ALARM SYSTEM EQUIPMENT SUBMITTAL

TABLE OF CONTENTS

- Insert 1 Project Bill of Material (BOM)**
- Insert 2 Control Equipment, Batteries & Accessories**
Simplex 4010ES Fire Control Panel and Accessories Data Sheet (S4010-0004)
Simplex LCD Annunciator Data Sheet (S4606-9102)
Simplex Sealed Lead-Acid System Batteries Data Sheet (S2081-0006)
- Insert 3 Initiating/Addressable Devices, Relays & Accessories**
Simplex Addressable Manual Stations Data Sheet (S4099-0001)
Simplex Smoke, Heat Sensors & Bases Data Sheet (S4098-0019)
Simplex Addressable Duct Smoke Sensor Data Sheet (S4098-0030)
Simplex Individual Addressable Module (IAM) Data Sheet (S4090-0001)
- Insert 4 Notification Appliances & Accessories**
Simplex Visible Notification Appliances Data Sheet (S4906-0001)
Simplex Horn/Strobe Notification Appliances Data Sheet (S4906-0002)
Simplex Weatherproof Notification Appliances Data Sheet (S4906-0010)

INSERT 1

PROJECT BILL OF MATERIAL

**BILL OF MATERIAL
PORTLAND FOOD CO-OP
FIRE ALARM SYSTEM EQUIPMENT**

TAB	QTY	MODEL	DESCRIPTION
CONTROL EQUIPMENT, BATTERIES & ACCESSORIES			
2	1	4010-9401	SIMPLEX 4010ES FACP, 120V RED
2	1	4010-9912	SIMPLEX 4010ES SERIAL DACT
2	1	ETHEDROP	NETWORK - ETHERNET COMPATIBLE
2	2	2081-9275	BATTERY, SYSTEM, 12VOLT, SEALED, LEAD ACID 18Ah
2	1	4606-9102	REMOTE LCD ANNUNCIATOR FOR 4010ES
2	1	2975-9206	6 GANG BOX, IVORY, SURF MNT FOR LCD ANNUNCIATOR
INITIATING/ADDRESSABLE DEVICES & ACCESSORIES			
3	3	4099-9003	IDNET DOUBLE ACTION PULL STATION
3	3	2975-9178	BOX/ADDRESSABLE PULL STATION
3	1	4098-9714	TRUEALARM PHOTO SMOKE SENSOR
3	1	4098-9792	TRUEALARM SENSOR BASE
3	2	4098-9756	TRUEALARM DUCT SMOKE SENSOR W/ RELAY OUTPUT
3	2	2098-9806	REMOTE TEST STATION W/ LED AND KEY SWITCH
3	2	4098-9856	SAMPLING TUBE, 49"
3	4	4090-9001	IDNET SUPERVISED IAM
3	4	4090-9807	SURFACE MNT SINGLE GANG BOX COVER PLATE W/LITE PIPE
3	4	4090-9810	4090-9001 IAM SINGLE GANG BOX MOUNTING BRACKET
NOTIFICATION APPLIANCES & ACCESSORIES			
4	10	4906-9128	A/V M-C NON-ADDRESS, RED CEIL
4	2	4906-9101	V/O M-C NON-ADDRESS, RED, WALL
4	1	4906-9105	WP VO MC NON-ADDR WALL, RED
4	1	49WPBB-AVVOWR	WP VO BACK BOX

INSERT 2

CONTROL EQUIPMENT, BATTERIES &
ACCESSORIES

Features

Basic system includes:

- Capacity for up to 248 addressable devices, up to 127 VESDA SLI points, up to 2000 points of Annunciation and up to 20 internal and external card addresses
- Color-coded operator interface with membrane keypad includes 2 x 40 Super-twist LCD display, 3 programmable control keys and 6 programmable LEDs
- CPU assembly includes dedicated compact flash memory for on-site system information storage and convenient Ethernet service port access
- 8 A power supply with up to 2 A of Auxiliary power and battery charger capacity for up to 110 Ah batteries (UL) or up to 50 Ah batteries (ULC) (33 Ah max in control panel cabinet)
- 4 on-board Class A or B, 3 A NACs and one programmable auxiliary relay output rated for 2 A @ 32 VDC
- Class A or B Two-loop Isolated IDNet Communications (IDNet+) supports up to 248 addressable and analog sensing devices on non-twisted, non-shielded wiring
- Remote annunciator module support via RUI (Remote Unit Interface) communications port, supports either Class B (Style 4) or X (Style 7) Pathway operation
- 48 LED panel mount annunciation provides 40 Red and 8 Yellow pluggable LEDs (select models, meets ULC requirements), optional LED kits are available for custom LED configurations

Optional Main System Supply and door mounted modules include:

- City Connect (with or without disconnect switches)
- Alarm Relay Module
- TrueInsight Remote Gateway

Optional block space modules include:

- Fire Alarm Network Interface Card for 4120/4100 Peer-to-Peer network communications, supports either Class B or X (Style 7) Pathway operation
- Ethernet connectivity options include Building Network Interface Module (BNIC), SafeLINC Internet Interface, and BACpac Ethernet Portal
- Dual RS-232 Module (for printer, PC annunciator or third party interface)
- VESDA Air Aspiration High Level Interface
- Serial DACT
- 8 Zone IDC Modules Class A or B
- 4 Point Auxiliary Relay Module
- Physical Bridge Network Modules



4010ES Fire Alarm Control Panels are available standard (left) or with LED Annunciation (right)

Compatible with Simplex® remotely located:

- 4098-9757 QuickConnect 2 and legacy 4098-9710 QuickConnect TrueAlarm smoke sensors
- 4003EC Small Voice Panels
- 4009 IDNet NAC Extenders (4009A)
- 4081 Series, 110 Ah Battery Chargers
- 4100-7400 Series Graphic Annunciators
- 4190 Series PC Annunciator
- 4190 Series Fiber Modems and Physical Bridges
- 4606-9102 Remote LCD Annunciator, 4100-9400 Series Remote InfoAlarm Command Centers, and 4602 Series Status Command Units (SCU) and Remote Command Units (RCU) Annunciators
- IP communicator compatibility

4010ES Agency listings:

- UL Std. 864, Fire Detection and Control (UOJZ), and Smoke Control Service (UUKL), and Releasing Service (SYZV)
- UL Std. 2017, Process Management Equipment (QVAX)
- UL Std. 1076, Proprietary Alarm Units-Burglar (APOU)
- UL Std. 1730, Smoke Detector Monitor (UULH)
- ULC Std. S527-99, Fire Detection and Control (UOJZC)
- ULC Std. S559-04, Supervising Station (DAYRC)

* See pages 5 and 6 for additional listing information. This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7165-0026:0369 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. NYC Fire Dept COA #6095. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.


Introduction

4010ES Series Fire Detection and Control Panels provide leading edge installation, operator, and service features for customer applications in the mid-range addressable fire alarm systems market. An on-board Ethernet port provides fast external system communications to expedite installation and service activity. Dedicated compact flash memory archiving provides secure on-site system information storage of electronic job configuration files to meet NFPA 72 (*National Fire Alarm and Signaling Code*) requirements.

Modular design. A variety of functional modules are available to meet specific system requirements. Selections allow panels to be configured for either Stand-Alone or Networked fire control operation.

Panel Hardware

The Master Controller and Main System Supply are mounted in the upper section of the 4010ES cabinet.

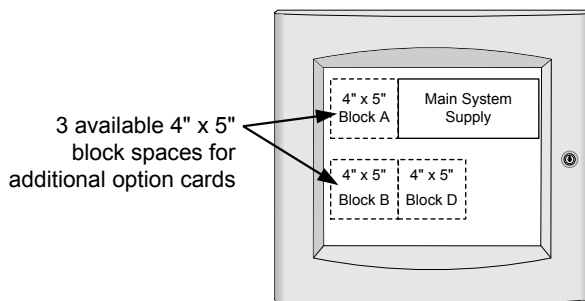

Panel Hardware (Continued)

4010ES Block Space Option Cards mount to the left of the 4010ES Main System Supply. There are 3 available 4\" x 5\" blocks for mounting 4010ES hardware options.


Other 4010ES Options: The 4010ES City Connect module or the optional Alarm Relay module mount directly to the Main System Supply. These options are mutually exclusive.

Network Media modules mount directly to the 4010ES Network Interface Card.

The TrueInsight Remote Gateway mounts on the back side of the 4010ES User Interface Panel.

The Battery Compartment located in the bottom of the 4010ES cabinet accepts two batteries, up to 33 Ah, without interfering with expansion module space.

The illustrations below identify mounting locations available for optional 4010ES modules.

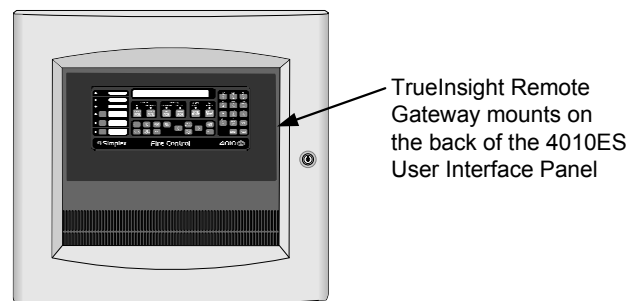

Mounting Locations for Optional Modules

Mechanical Description

- Mounting box provides convenient stud markers for drywall thickness and nail-hole knockouts for quicker mounting
- Smooth box surfaces are provided for locally cutting conduit entrance holes exactly where required
- The hinged User Interface panel easily opens for internal access
- Modules are power-limited (except as noted, such as relay modules)
- Doors include tempered glass inserts, boxes and doors are available in platinum or red
- Box and door/retainer assemblies are included with Basic Panel assemblies
- Cabinet assembly is rated NEMA 1 and IP 30

Software Feature Summary

- TrueAlarm individual analog sensing with front panel information and selection access
- “Dirty” TrueAlarm sensor maintenance alerts, service and status reports including “almost dirty”
- TrueAlarm magnet test indication appears as distinct “test abnormal” message on display when in test mode
- TrueAlarm sensor peak value performance report
- **“Install Mode”** allows grouping of multiple troubles for uninstalled modules and devices into a single trouble condition (typical with future phased expansion); with future equipment and devices grouped into a single trouble, operators can more clearly identify events from the commissioned and occupied areas
- Module level ground fault searching assists installation and service by locating and isolating modules with grounded wiring
- **“Recurring Trouble Filtering”** allows the panel to recognize, process, and log recurring intermittent troubles (such as external wiring ground faults), but only sends a single outbound system trouble to avoid nuisance communications
- WALKTEST silent or audible system test performs an automatic self-resetting test cycle


Operator Interface Features

- Convenient and extensive operator information is provided using a logical, menu-driven display
- Multiple automatic and manual diagnostics for maintenance reduction
- Convenient PC programmer label editing
- Password access control
- Alarm and Trouble History Logs (up to 2000 total events) are available for viewing from the LCD, or capable of being printed to a connected printer, or downloaded to a service computer

Convenient Status Information. With the locking door closed, the glass window allows viewing of the display, status LEDs, and available operator switches. Features include a two-line by 40-character, wide viewing angle (super-twist) LCD with status LEDs and switches as shown in the illustration below.

LED indicators describe the general category of activity being displayed with the LCD providing more detail. For the authorized user, unlocking the door provides access to the control switches and allows further inquiry by scrolling the display for additional detail.

The following illustration identifies the primary functions of the operator interface.

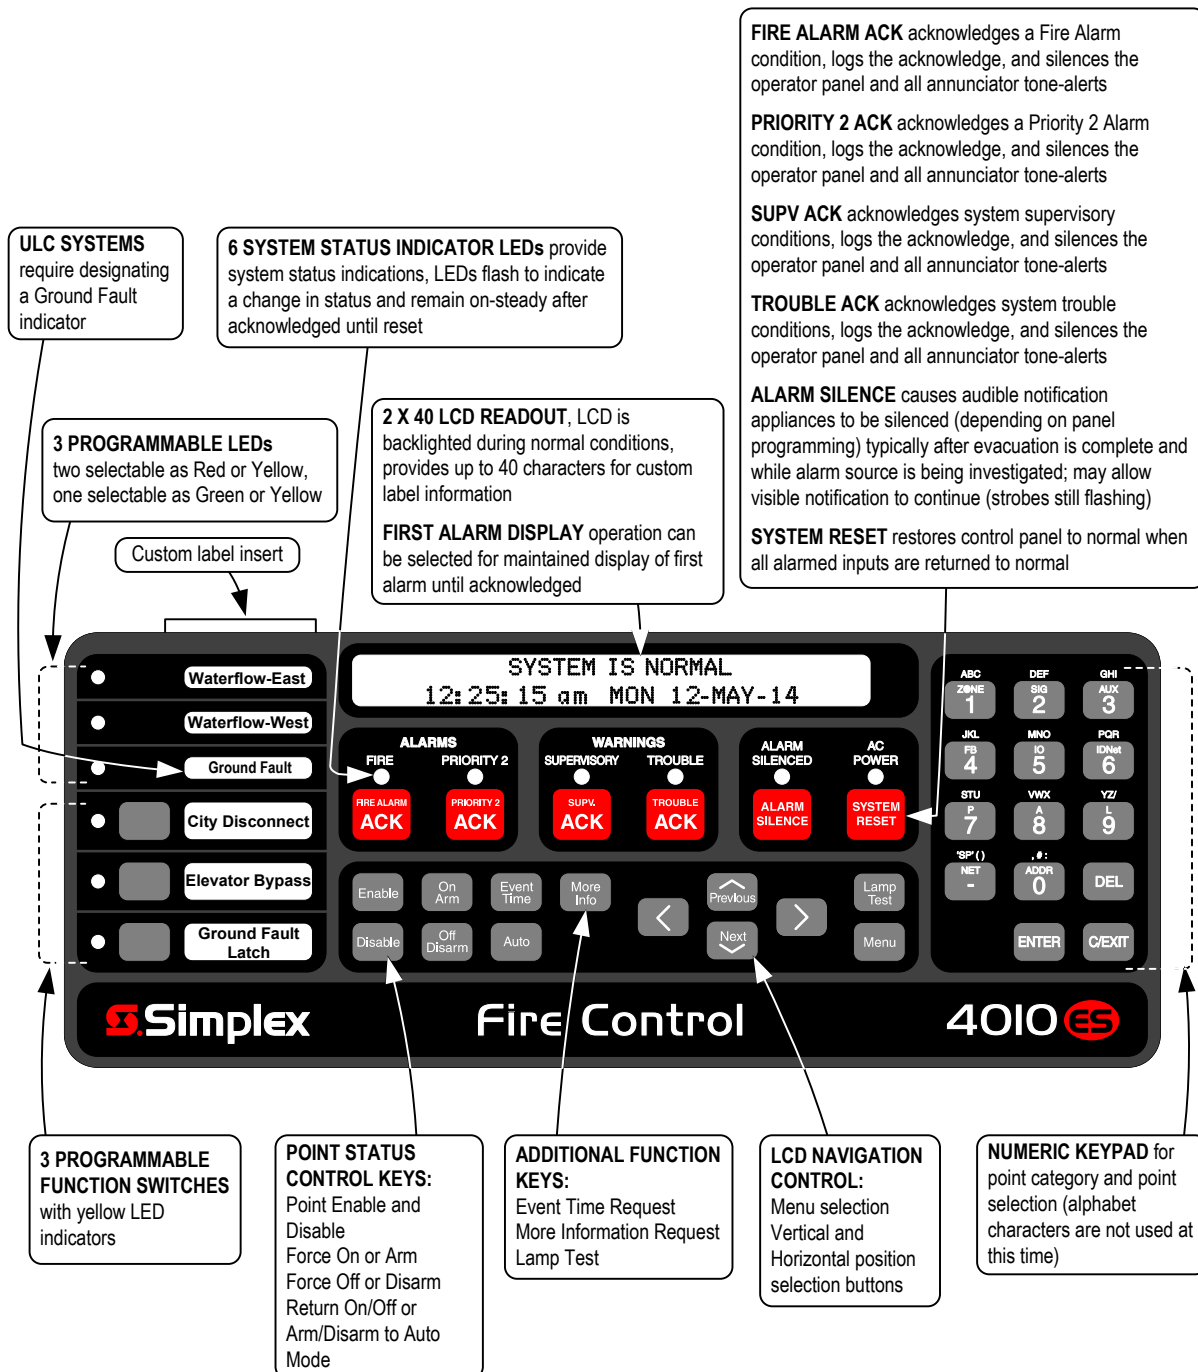

Compatible Peripheral Devices

The 4010ES is compatible with an extensive list of remote peripheral devices including printers, PC Annunciators and both conventional and addressable devices including TrueAlarm analog sensors.

Addressable Device Control

Overview. The 4010ES provides standard addressable device communications for IDNet compatible devices. Using a two wire communications circuit, individual devices such as manual fire alarm stations, TrueAlarm sensors, conventional IDC zones, and sprinkler waterflow switches can be interfaced to the addressable controller to communicate their identity and status.

Addressability allows the location and condition of the connected device to be displayed on the operator interface LCD and on remote system annunciators. Additionally, control circuits (fans, dampers, etc.) may be individually controlled and monitored with addressable devices.

Addressable Operation. Each addressable device on the communication channel is continuously interrogated for status condition such as: normal, off-normal, alarm, supervisory, or trouble. Both Class B and Class A pathway operation are available. Sophisticated poll and response communication techniques ensure supervision integrity and allow for "T-tapping" of the circuit for Class B operation. Devices with LEDs pulse the LED to indicate receipt of a communications poll and can be turned on steady from the panel.

IDNet+ Channel Capacity. The Main System Supply provides an IDNet+ signaling line circuit (SLC) that supports up to 248 addressable monitor and control devices intermixed on the same pair of wires.

IDNet+ Communications wiring specifications. IDNet+ circuits may be run on NEC 760 untwisted pair, twisted pair, or shielded twisted pair conductors.

IDNet+ Wiring Specifications

Size	18 AWG (0.82 mm ²)	
Type	NEC 760 Wire (untwisted, twisted, or shielded twisted pair)	
Farthest Distance from Control Panel per Device load	126-248	Up to 2500 feet (762 m)
	up to 125	Up to 4000 ft (1219 m)
Total Wire Length Allowed Class A or Class B, including "T-taps" for Class B wiring (total for both isolated circuits combined)	Up to 12,500 ft (3.8 km) Note: The sum of line-to-line capacitance plus the capacitance of either line-to-shield (if shield is present) = 0.6 µF maximum (total for both isolated circuits combined)	

* Other circuits may require shielded wiring. Review your system with your local Simplex product supplier.

TrueAlarm System Operation

Addressable device communications include operation of TrueAlarm smoke and temperature sensors. Smoke sensors transmit an output value based on their smoke chamber condition and the CPU maintains a current value, peak value, and an average value for each sensor.

Status is determined by comparing the current sensor value to its average value. Tracking this average value as a continuously shifting reference point filters out environmental factors that cause shifts in sensitivity.

Programmable sensitivity of each sensor can be selected at the control panel for different levels of smoke obscuration (shown directly in percent) or for specific heat detection levels. To evaluate whether the sensitivity should be revised, the peak value is stored in memory and can be easily read and compared to the alarm threshold directly in percent.

CO sensor bases combine an electrolytic CO sensing module with a TrueAlarm analog sensor to provide a single multiple sensing assembly using one system address. The CO sensor can be enabled/disabled, used in LED/Switch modes and custom control, and can be made public for communication across a fire alarm Network. (refer to data sheet S4098-0052 for details)

TrueAlarm heat sensors can be selected for fixed temperature detection, with or without rate-of-rise detection. Utility temperature sensing is also available, typically to provide freeze warnings or alert to HVAC system problems. Readings can be selected as either Fahrenheit or Celsius.

TrueSense Early Fire Detection. Multi-sensor 4098-9754 provides photoelectric and heat sensor data using a single 4010ES IDNet address. The panel evaluates smoke activity, heat activity, *and their combination*, to provide TrueSense early detection. For more details on this operation, refer to data sheet S4098-0024.

Diagnostics and Default Device Type

Sensor Status. TrueAlarm operation allows the control panel to automatically indicate when a sensor is almost dirty, dirty, and excessively dirty. The NFPA 72 requirement for a test of the sensitivity range of the sensors is fulfilled by the ability of TrueAlarm operation to maintain the sensitivity level of each sensor. CO Sensors track their 10 year active life status providing indicators to assist with service planning. Indicators occur at: 1 year, 6 months, and when end of life is reached.

Modular TrueAlarm sensors use the same base and different sensor types (smoke or heat sensor) and can be easily interchanged to meet specific location requirements. This allows intentional sensor substitution during building construction when conditions are temporarily dusty. Instead of covering smoke sensors (causing them to be disabled), heat sensors may be installed without reprogramming the control panel. The control panel will indicate an incorrect sensor type, but the heat sensor will operate at a default sensitivity to provide heat detection for building protection at that location.

Master Controller (CPU)

- The 4010ES Master Controller includes dedicated 2GB compact flash Mass Storage memory for on-site system information storage and convenient Ethernet service port access
- Convenient front panel accessed Ethernet port for quick and easy **download** of site-specific programming
- **AND**, firmware enhancements are made via software downloads to the on-board flash memory
- Every downloaded job is automatically stored to Compact flash without overwriting earlier versions providing a means for recovering previous configurations
- Downtime is reduced because the system stays running during download
- Modifications can be **uploaded** as well as downloaded for greater service flexibility
- Mass Storage allows job specific files to be stored in the control panel such as test and inspection reports, record drawings, specifications, and more...
- Ethernet connectivity options include Building Network Interface Module (BNIC) and SafeLINC Internet Interface
- RUI (Remote Unit Interface) communications port supports either Class B or X Pathway operation for remote annunciation equipment

Basic Panel Description

4010ES panels include: an Operator Interface, Master Controller with 2GB Compact Flash, Class A or B Two-loop Isolated IDNet Communications (IDNet+) supporting up to 248 addressable and analog sensing devices, 8 A power supply with up to 2 A of auxiliary power, 110 Ah (UL) / 50 Ah (ULC) battery charger (33 Ah maximum in the control panel cabinet), 4 Class A or Class B NACs rated @ 3 A each for Special Application and 2 A for Regulated 24 DC operation, 1 programmable auxiliary relay rated for 2 A @ 32 VDC, 1 RUI Class B or X communications port for remote annunciation devices, cabinet, and door.

Support is for up to 20 internal and external card addresses. Other standard options may be provided depending on model (see basic panel model selection below for additional details on specific models).

Main System Supply

The Main System Supply provides the power source and the Input/Output connections for the basic 4010ES panel. The main features are listed in the Basic Panel description below.

Basic Panel Model Selection

Note: Supervisory and Alarm current specifications are for determining battery standby requirements. Current specifications include an active RUI channel and alarm currents include 20 IDNet device LEDs activated. Actual IDNet channel device current is not included, refer to page 6 for details. For models with 48 LED Annunciation, alarm also includes 24 LEDs activated.

Model*	Panel Color	Language & Voltage	Listings	Features	Supv. Current	Alarm Current	Available Option Blocks
4010-9401(BA)	Red	English 120 VAC	UL, CSFM, FM, NYC Fire Dept	Basic panel with 2x40 LCD Operator Interface and (1) Two-loop Isolated IDNet+ Channel, Class A or B, with support for up to 248 addressable devices	316 mA	430 mA	3 4"x5" blocks
4010-9402(BA)	Platinum						
4010-9403(BA)	Red	English 120 VAC	UL, ULC, CSFM, FM, NYC Fire Dept	Same features as above with 48 LED annunciation	336 mA	495 mA	
4010-9404(BA)	Platinum						
4010-9405	Red	French 120 VAC	ULC, CSFM, FM				
4010-9406	Platinum						

* Models with (BA) are available as assembled in the USA by adding the suffix "BA".

Addressable Device Load Specifications for Battery Standby

Addressable Channel	Device Load	Supervisory Current	Alarm Current
Main System Supply IDNet+ Channel Output (does not include device LEDs in alarm)	With 248 Devices, Add	199 mA	248 mA
	With 125 Devices, Add	100 mA	125 mA
	With 50 Devices, Add	40 mA	50 mA

Block Space Option Card Selection

Note: Refer to diagram on page 2 for Option Module availability. Supervisory and Alarm current specifications are for determining battery standby requirements.

**Single Block Option Modules, Select Three (3) Maximum if No Dual Block Module is Selected;
Select One (1) Maximum if a Dual Block Module or the Module Bracket is Selected**

Model	Features	Option Block Usage	Supervisory Current	Alarm Current
4010-9912	Serial DACT	1 Block (must mount in block D under main system supply)	30 mA	40 mA
4010-9908	4 Point Aux Relay Module	1 Block	15 mA	60 mA
4010-9916	Voltage Regulator Module, 22.8 to 26.4 VDC (25 VDC nominal); isolated and resettable output; includes earth detection circuit and trouble relay for status monitoring	1 Block	3 A maximum with 2.5 A load	4.9 A maximum with 4 A load
4010-9918	Dual RS-232 Module	1 Block	60 mA	60 mA
4010-9915	BACpac Ethernet Portal Module; requires 4010-9918 RS-232 Module (no address required)	1 Block	123 mA	123 mA
4010-9901	VESDA HLI	1 Block	60 mA	60 mA

Dual Vertical Block (Flat) Modules, Select One, or Two with 4010-9928 Bracket Kit (except for Media Cards)

Model	Features	Option Block Usage	Supervisory Current	Alarm Current
4010-9928	Dual Vertical Block Card Mounting Kit, allows selecting two, dual Vertical Block (flat) modules from the list below	2 Vertical Blocks	NA	NA
4010-9922	Modular Network Interface Card (requires two media modules, see below)	2 Vertical Blocks	30 mA	30 mA
4010-9818	Network Media Card Wired	N/A (mounts to 4010-9922)	55 mA	55 mA
4010-9819	Network Media Card Fiber Optic		25 mA	25 mA
4010-9914	Building Network Interface Card	2 Vertical Blocks	236 mA	236 mA
4010-9923*	SafeLINC Internet Interface	2 Vertical Blocks	115 mA	115 mA
4010-9924*	Modem Physical Bridge Class B (Style 4)	Requires one of the 2 Vertical Block spaces on the 4010-9928 Mounting Kit	193 mA	193 mA
4010-9925*	Modem Physical Bridge Class X (Style 7)		246 mA	246 mA
4010-9926**	TCP/IP Physical Bridge Class B (Style 4)	3 Block "L" Shape, requires one of the 2 Vertical Block spaces on the 4010-9928 Mounting Kit, plus Block D	196 mA	196 mA
4010-9927**	TCP/IP Physical Bridge Class X (Style 7)		236 mA	236 mA

Dual Vertical Block (Slot) Modules, Select One if no Dual Vertical (Flat) Modules from Above are Selected

Model	Features	Option Block Usage	Supervisory Current	Alarm Current
4010-9920	8 Zone Initiating Device Circuit - Class B	2 Vertical Blocks (mother/daughter card)	75 mA	195 mA
4010-9921	8 Zone Initiating Device Circuit - Class A			

*UL, ULC, and CSFM listed.


** FM Approved only.

Additional Panel Option Selection (block space is not used)

Model	Features	Supervisory Current	Alarm Current	Mounting Requirements
4010-9909	City Connect Module w/ disconnect switches	20 mA	36 mA	Select one maximum, mounts on Main System Supply
4010-9910	City Connect Module	20 mA	36 mA	
4010-9911	Alarm Relay Module	15 mA	37 mA	
4190-6104*	TrueInsight Remote Gateway	62 mA	62 mA	Mounts on Front Door
4100-5128	Battery Distribution Terminal Block, mounts to side of box, required when battery connection leaves the 4010ES box (also used in the 4100ES fire alarm control panel)			

* Refer to data sheet S4100-0063 and contact your local Simplex product representative for more details.

Cabinet Dimension Reference

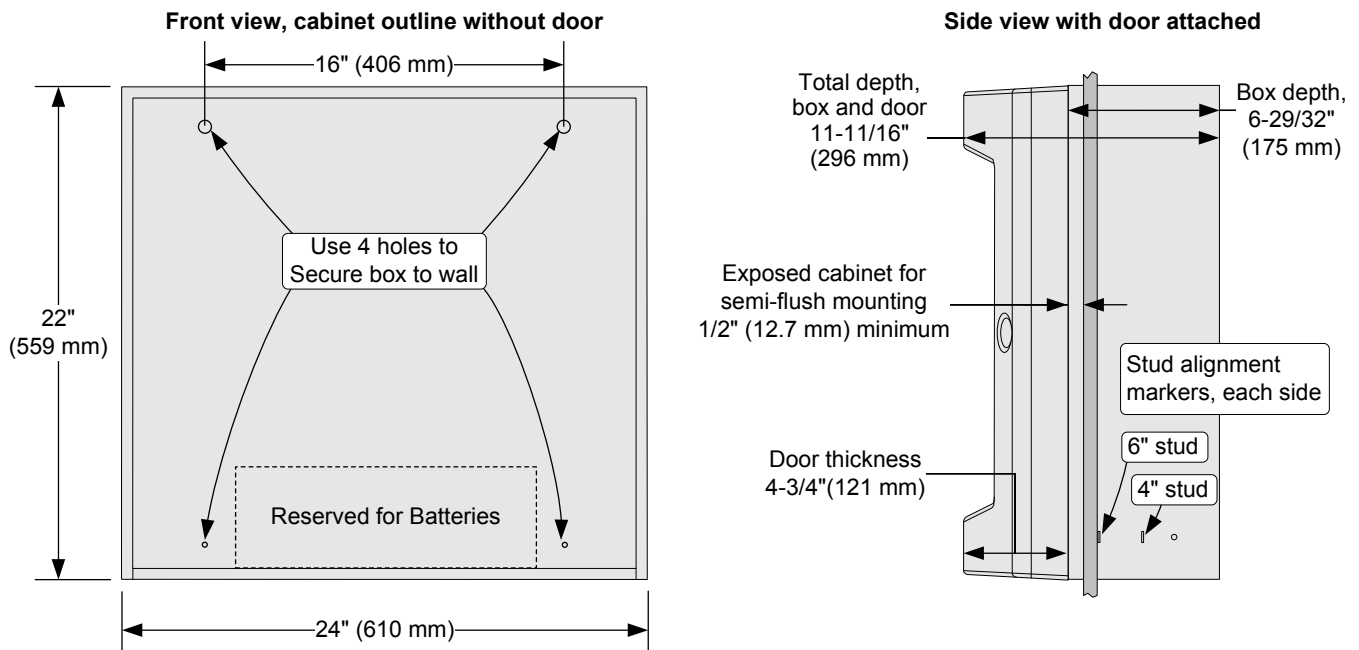

Miscellaneous Accessories

LED Kits

Model	Description
4100-9843	8 Yellow LED Kit
4100-9844	8 Green LED Kit
4100-9845	8 Red LED Kit
4100-9855	8 Blue LED Kit

End User Programming Tools

Model	Description
4100-8802	End User Programming Unit Software
4100-0292	Custom Label Editing (USB Dongle)
4100-0295	Port Vectoring Setup and Control (USB Dongle)
4100-0296	Access Level/Passcode Editing (USB Dongle)
4100-0298	WalkTest Configuration Setup and Control (USB Dongle)

4010ES Factory Programming

Model	Description
4010-8810	4010ES Factory Programming
4010-0831	Custom Label and Panel Programming

4010ES Card Address Allocation

The 4010ES has a maximum Internal and External Card Address Limit of 20 Card Addresses. Use the Table below to calculate 4010ES card address allocation.

INSTRUCTIONS: Below is a list of 4010ES equipment and the quantity of card addresses they consume

1. For the applicable control panel, write in the Card Address Consumption value in the Card Address Allocation column.
(Note: Only select 1 control panel)
2. For the option cards to be installed on the 4010ES, write in the Card Address Consumption value in the Card Address Allocation column.
3. Total the Card Address Allocation column (total must not exceed 20).

Model	Description	Card Address Consumption	Card Address Allocation	Notes
Control Panels (Select One)				
4010-9401 4010-9402	2x40 Display, Single IDNet Channel, Single Bay Box	2		
4010-9403 4010-9404 4010-9405 4010-9406	2x40 Display, Single IDNet Channel, 48 Pluggable LED Module	3		4010-9405 & 4010-9406 are for Canada
Panel Option Cards (Select As Required)				
4010-9901	Flat VESDA HLI Card	1		
4010-9922	Flat Network Card	1		
4010-9908	4 Point Flat Aux Relay Module	1		
4010-9912	Serial DACT	1		
4010-9923	SafeLINC Internet Interface Card	1		
4010-9914	Building Network Interface Card	1		
4010-9918	Dual RS-232 Module	1		
4010-9920	8 Zone Initiating Device Circuit - Class B	1		
4010-9921	8 Zone Initiating Device Circuit - Class A	1		
Remote Annunciation (Select As Required)				
4100-9401	Remote InfoAlarm Command Center	Red Cabinet, English	2	
4100-9403		Platinum Cabinet, English	2	
4100-9421		Red Cabinet, French	2	for Canada
4100-9423		Platinum Cabinet, French	2	for Canada
4100-9441		Red Cabinet, with blank inserts for key labels	2	
4100-9443		Platinum Cabinet, with blank inserts for key labels	2	
4606-9102	4010ES RUI LCD Annunciator, English	1		
4606-9102BA	4010ES RUI LCD Annunciator, English	1		
4606-9102CF	4010ES RUI LCD Annunciator, French	1		for Canada
4602-9101	Status Command Unit (SCU) LED Annunciator	1		
4602-9102	Remote Command Unit (RCU) LED Annunciator w/control	1		
4602-9150	Graphic I/O RCU/SCU Assembly for custom annunciator panels	1		
4602-7101	Graphic I/O RCU/SCU Assembly for custom annunciator panels	1		
4602-7001	RCU for cabinet mount	1		
4602-6001	SCU for cabinet mount	1		
4100-7401	24 Point I/O Graphic Module for custom annunciator panels	1		
4100-7402	64/64 LED Switch Controller for custom annunciator panels	1		
4100-7403	32 Point LED Driver Module for custom annunciator panels	1		
4100-7404	32 Point Switch Input Module for custom annunciator panels	1		
Total Card Addresses (Not to Exceed 20)		TOTAL		

General Specifications

AC Input Current	4 A maximum, 120 VAC @ 60 Hz nominal		
Power Supply Output Ratings (nominal 28 VDC on AC, 24 VDC on battery backup)	Total Power Supply Output Rating	Including module currents and auxiliary power outputs; 8 A total for "Special Application" appliances; 4 A total for "Regulated 24 DC" power (see below for details)	Output switches to battery backup during mains AC failure or brownout conditions
	Auxiliary Power Tap	2 A maximum, rated 19.1 to 31.1 VDC	
Special Application Appliances, maximum of 70 appliances per NAC	Simplex 4901, 4903, 4904, and 4906 Series horns, strobes, and combination horn/strobes and speaker/strobes (contact your Simplex product representative for compatible appliances)		
Regulated 24 DC Appliances	Power for other UL listed appliances; use associated external synchronization modules where required		
Battery Charger Rating (sealed lead acid batteries)	Battery capacity range	UL listed for battery charging of 6.2 Ah up to 110 Ah; ULC listed for charging up to 50 Ah batteries; batteries above 33 Ah require separate cabinet	
	Charger characteristics and performance	Temperature compensated, dual rate, recharges depleted batteries within 48 hours per UL Standard 864; to 70% capacity in 12 hours per ULC Standard S527	
Environmental	Operating Temperature	32° to 120°F (0° to 49° C)	
	Operating Humidity	Up to 93% RH, non-condensing @ 90° F (32° C) maximum	
Additional Technical Reference	Installation Instructions	579-989	
	Operating Instructions	579-969	

Additional Compatible Equipment and Reference

Subject	Data Sheet	Subject	Data Sheet
4010ES Agent Release Applications and Accessories	S4010-0005	Network Communications	S4100-0056
Agent Release Accessories	S2080-0010	Multi-Signal Fiber Optics	S4100-0049
Building Network Interface	S4100-0061	4602 Series SCU/RCU	S4602-0001
SafeLINC Internet Interface	S4100-0062	PC Annunciator	S4190-0013
Interface to VESDA Air Aspiration Detection Systems	S4100-0026	Addressable Device Compatibility, IDNet Communication Sensors and Devices	S4090-0011
Serial DACT (SDACT)	S2080-0009	4009 IDNet NAC Extender	S4009-0002
Fire Alarm Network Overview	S4100-0055	4003EC Voice Control Panel	S4003-0002
TrueInsight Remote Service	S4100-0063	120 VAC Desktop Remote Printer	S4190-0011
4606-9102 Remote LCD Annunciator	S4606-0002	110 Ah Batteries and Cabinets	S2081-0012
Graphic I/O Modules	S4100-0005	Remote 110 Ah Battery Chargers and Cabinets	S4081-0002
Remote InfoAlarm Command Center	S4010-0008	BACpac Ethernet Portal Module	S4100-0051
PC Annunciator	S4190-0013	Network Physical Bridge	S4100-0057
TCP/IP Physical Bridge	S4100-0029		

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. VESDA is a trademark of Xtralis Pty Ltd. NFPA 72 and National Fire Alarm and Signaling Code are trademarks of the National Fire Protection Association (NFPA). ASHRAE and BACnet are trademarks of ASHRAE, American Society of Heating, Refrigeration, and Air Conditioning Engineers.



Tyco Fire Protection Products • Westminister, MA • 01441-0001 • USA
www.simplex-fire.com

S4010-0004-9 5/2014

© 2014 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

Features

Rechargeable, sealed lead-acid batteries:

- Lead-calcium grid structure with immobilized electrolyte in absorbent separator
- Low maintenance with no need to add water
- Low self-discharge characteristics
- One-piece, high impact polystyrene cell cover with high reliability dual seal construction
- UL 924 recognized pressure relief valves

Available in a variety of capacities:

- Batteries for internal mounting range from 6.2 Ah up to 50 Ah, depending on control panel cabinet size
- Larger batteries, up to 110 Ah, mount in external battery cabinets with models available with internal chargers

Battery cabinets with chargers:

- Battery cabinets with charger communicate with their connected fire alarm control panel and are available for 4100ES/4010ES/4100U Series and 4010 Series panels

Description

Simplex® rechargeable sealed-lead acid batteries provide reliable and repeatable discharge and recharge characteristics for use in fire alarm and other systems applications. They are designed with immobilized electrolyte in an absorbent separator, allowing them to provide rated capacity on the first cycle.


Because of their sealed construction, packaging is allowed within the system electronics enclosure (see illustration on page 2). When this is applicable, the quantity of system cabinets and the battery wiring distances are both minimized. Where required, external battery cabinets can be close-nipped to the control panel to house larger batteries with battery chargers available in some battery cabinet sizes.

Battery Details


Charging. These batteries are intended to be used with compatible Simplex battery chargers.

Series Connections. These batteries are required to be connected in series to produce 24 V system voltage. Battery sets must be of identical voltage, model number, appearance, and approximately the same date of manufacture for proper operation.

Testing. Battery capacity testing is recommended to be performed by using a sealed lead-acid battery tester designed to withdraw a minimum of battery charge. The preferred tester applies a variety of amplitude and duration controlled test pulses that compares terminal voltage against those predicted for the specific battery size. (Testing is available through your local Simplex product supplier.)

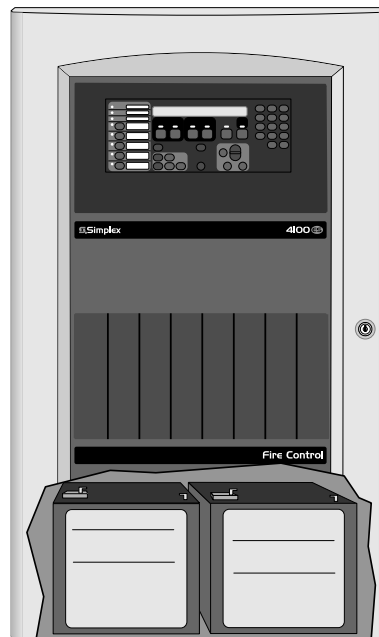

Compatible Sealed Lead-Acid Batteries can be Installed Inside Fire Alarm Control Panel Cabinets

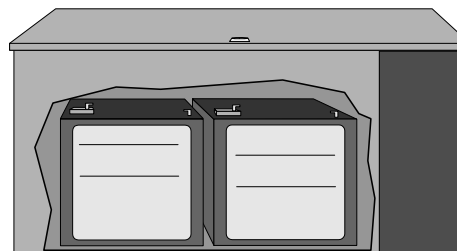

Remote Battery Cabinets are Available for Larger Battery Requirements

Battery Details (Continued)


Shipping. Sealed lead-acid batteries are shipped via ground or sea transportation only. They are not shipped via air.

Disposal. Battery chemicals and materials can be recycled. Refer to information shipped with the battery or on its case. Return to the battery manufacturer or to a similarly qualified battery processing facility for proper disposal.

* Refer to details on page 4 and to the referenced individual product data sheets for agency listing status of battery cabinets and chargers. The batteries detailed in this document meet the requirements of UL, ULC, and Factory Mutual for use with respective equipment battery chargers as listed on page 3. Contact your local Simplex product supplier for proper battery selection per system requirements. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.

Battery Construction Reference

Actual appearance will vary with battery size.

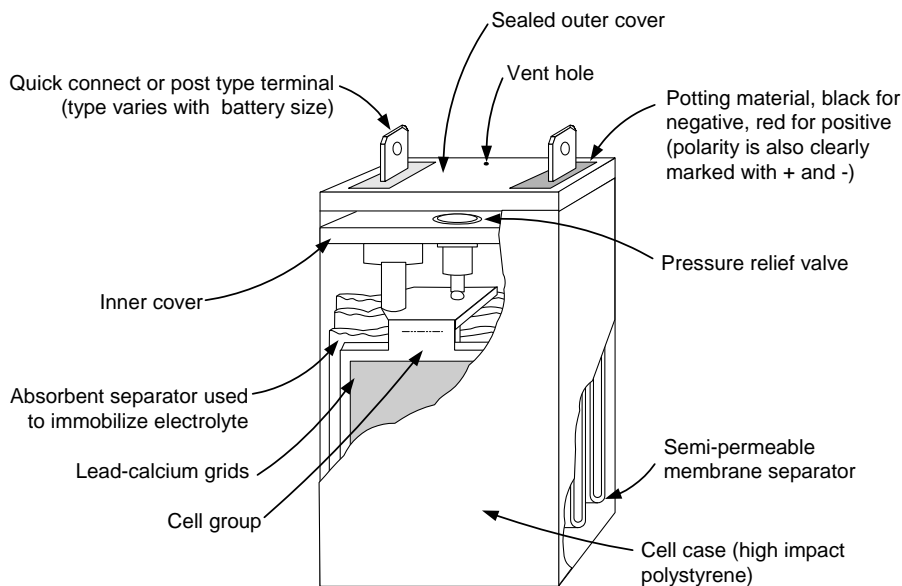

Battery Size Specifications

Battery Model	Capacity @ 20 Hour Discharge Rate	Width*	Depth*	Height with Terminals	Approximate Weight*
2081-9272	6.2 Ah	6-1/8" (156 mm)	2-5/8" (67 mm)	4" (102 mm)	5.75 lbs (2.6 kg)
2081-9274	10 Ah	6" (153 mm)	4-1/16" (103 mm)	4" (102 mm)	9.2 lbs (4.2 kg)
2081-9288	12.7 Ah	6" (153 mm)	4" (102 mm)	4" (102 mm)	9 lbs (4.1 kg)
2081-9275	18 Ah	7-1/4" (184 mm)	3-3/8" (86 mm)	6-5/8" (168 mm)	14.3 lbs (6.5 kg)
2081-9287	25 Ah	6-5/8" (168 mm)	5" (127 mm)	7" (178 mm)	19.4 lbs (8.8 kg)
2081-9271 (rectangular case, typically for service)	33 Ah	12-1/2" (318 mm)	3-3/8" (86 mm)	7-1/16" (179 mm)	26.6 lbs (12.1 kg)
2081-9276 ("square" case, use for new)	33 Ah	7-3/4" (197 mm)	5-1/4" (133 mm)	6-3/4" (171 mm)	26.5 lbs (12 kg)
2081-9296	50 Ah	9" (229 mm)	5-1/2" (140 mm)	8-7/8" (225 mm)	41.8 lbs (19 kg)
2081-9279	110 Ah	11-3/16" (284 mm)	10-1/2" (267 mm)	9" (230 mm)	82 Lbs (37 kg)

* Dimensions and weight are per battery and are for reference only. Exact size may vary. Refer to the tables on page 3 for mounting compatibility. These batteries are 12 V each and series connected for 24 V system use.

NOTE: When wired in series for 24 V output, these batteries are to be of identical voltage, appearance, model number, and approximately the same date of manufacture.

General Battery Specifications

Nominal Voltage Rating	12 Volts per battery
Discharge Rating	20 Hour Rate
Typical Charge/Discharge Cycles	100 to 150
Preferred Charge Temperature Range	60° F to 90° F (15.6°C to 32.2° C)

Battery Compatibility for Fire Alarm Control Panel Mounting

NOTE: Refer to individual fire alarm control panel product data sheets for additional battery application information

Battery Model	Capacity	Simplex Control Panel Model Series (see legend and notes below)									
		4003EC	4004R	4005	4006 & 4008	4009 (all models)	4010	4010ES	4100ES/ 4100U	4100 & 4120 (2, 4 or 6-Unit)	4020 (2, 4 or 6-Unit)
2081-9272	6.2 Ah	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2081-9274	10 Ah	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2081-9288	12.7 Ah	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2081-9275	18 Ah	Ext	Note 3	✓	Ext	Ext	Note 2	✓	✓	✓	✓
2081-9287	25 Ah	Ext	Note 3	Ext	Ext	NA	✓	✓	✓	✓	Ext
2081-9271 rectangular	33 Ah	Ext	Note 3	Ext	NA	NA	Note 3	✓	✓	Ext	Note 4
2081-9276 "square"	33 Ah	Ext	Note 3	Ext	NA	NA	Note 3	✓	✓	✓	Ext
2081-9296	50 Ah	NA	Note 3	NA	NA	NA	Note 3	Note 6	2 or 3 bay	Ext	Ext
2081-9279	110 Ah	Requires external battery cabinet, compatible with 4100ES, 4010ES, 4100, and 4120 Series only									

✓ = Can be placed in the respective equipment cabinet

Ext = External battery cabinet is required, refer to selection chart on page 4

NA = Not applicable/not compatible

NOTES:

- These batteries meet the requirements of UL, ULC, and Factory Mutual for use with respective equipment battery chargers listed above. Contact your local Simplex product supplier for proper battery selection per system requirements.
- 4010 Cabinets will accommodate 2081-9275, 18 Ah batteries, but will not allow bottom entry conduit.
- Use 4081 series companion cabinet and charger, refer to page 4.
- 4020 Cabinets will accommodate 2081-9271, 33 Ah batteries, but will not allow bottom entry conduit.
- Some control panel models are listed for battery replacement reference only.
- For 2 bay international applications only, 50 Ah batteries will fit in the cabinet.

External Battery Cabinet Compatibility Reference

Battery Cabinets without Chargers (connects to charger in panel)

Cabinet	Panel Compatibility	Battery					
		2081-9275 18 Ah*	2081-9287 25 Ah	2081-9271 Rectangular 33 Ah	2081-9276 Square 33 Ah	2081-9296 50 Ah	2081-9279 110 Ah
2081-9280	4100ES, 4010ES, 4100U, and 4100+	NA	NA	NA	NA	NA	✓
2081-9281 2081-9282	multiple	✓	✓	✓	✓	✓	NA
4009-9801	multiple	✓	✓**	NA	NA	NA	NA
4009-9802	multiple	✓	NA	✓	NA	NA	NA

Battery Cabinets with Chargers

Cabinet	Panel Compatibility	2081-9275 18 Ah*	2081-9287 25 Ah	2081-9271 Rectangular 33 Ah	2081-9276 Square 33 Ah	2081-9296 50 Ah	2081-9279 110 Ah
4081-9301 4081-9302	4004R and 4010	✓	✓	✓	✓	✓	NA
4081-9306 4081-9308	4100ES, 4010ES, and 4100U	NA	NA	NA	NA	✓	✓

* Batteries smaller than those listed are normally mounted in the product cabinet

** 25 Ah capacity was effective as of 7/2005.

✓ = Can be placed in the respective equipment cabinet

NA = Not applicable/not compatible

External Battery Cabinet Specification Reference

Battery Cabinets Without Chargers; Shallow Design with Front Door

Model	Color	Listings	Description	Dimensions
2081-9281	Beige	UL and FM	2-Unit, 4100 style cabinet without charger; with locking solid door and battery shelf, primarily for use with 50 Ah batteries	25-3/4" W x 20-3/4" H x 6-3/4" D (654 mm x 527 mm x 171 mm)
2081-9282	Red			
4003-9860	Beige	Multiple	Intended for use with 4003EC systems, for up to 33 Ah batteries (refer to 4003EC data sheet S4003-0002)	9-1/2" H x 24" W x 9" D (241 mm x 610 mm x 229 mm)
4009-9801*	Beige	UL and FM	External battery cabinet without charger, with locking solid door and battery harness; for close-nipped mounting to fire alarm control panel cabinet	16-1/4" W x 13-1/2" H x 5-3/4" D (413 mm x 343 mm x 146 mm)*
4009-9802	Beige	UL		

* Depth increased for 25 Ah batteries effective 7/2005.

Chargers for use with 4010 Fire Alarm Control Panels and 4004R Suppression Release Systems

(refer to data sheet S4081-0001)

Model	Color	Input Voltage	Description	Dimensions
4081-9301	Beige	120 VAC	Battery cabinet with charger for the 4010 and 4004R fire alarm control panel; for up to 50 Ah batteries ; with front door <i>Listings include: UL, ULC, FM, CSFM, and MEA (NYC), see data sheet for details</i>	22-1/2" W x 16-3/4" H x 8-3/8" D (572 mm x 425 mm x 213 mm)
4081-9302	Red			

Battery Cabinet Without Charger for 110 Ah Batteries; for use with compatible panel mounted chargers

(refer to data sheet S2081-0012)

Model & Listings	Color	Cabinet Description	Compatible Chargers	Charger Description	Dimensions
2081-9280 <i>Listings include: UL and CSFM</i>	Red	Battery cabinet for 2081-9279, 110 Ah batteries; includes 80 A battery fuse, terminals and battery connection cables; see data sheet for details	4010-9xxx Series	4010ES Main System Supply (MSS)	26-1/2" W x 12" H x 12" D (673 mm x 305 mm x 305 mm)
			4100-9xxx Series	4100ES/4100U System Power Supplies (SPS)	
			4100-5111 4100-5112 4100-5113	4100ES/4100U Additional SPS	
			4100-5125 4100-5126 4100-5127	4100ES/4100U Remote Power Supply (RPS)	
			4100-5120 4100-5121 4100-5122	4100ES/4100U TrueAlert Addressable Power Supply (TPS)	
			4100-0104 4100-0114 4100-0124	4100 Legacy power supplies	

4100ES/4010ES/4100U Compatible Battery Cabinet With Charger for 110 Ah Batteries (for ULC listed systems and for other applications unable to use panel mounted power supply charger; refer to data sheet S4081-0002)

Model	Color	Input Voltage	Description	Dimensions
4081-9306	Red	120 VAC	Battery cabinet with charger for up to 110 Ah batteries; NOTE: Required for ULC listed charging of 110 Ah batteries; <i>Listings include: UL, ULC, FM, CSFM, and MEA (NYC), see data sheet for details</i>	27-7/8" W x 13-1/2" H x 14-5/8" D (708 mm x 343 mm x 371 mm)
4081-9308	Red	220/230/240 VAC, multi-tapped		
4100-9837	Green LED Power-on Indicator Kit, required for ULC listing , mounts above access panel using knockout provided			

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited.



Tyco Fire Protection Products • Westminster, MA • 01441-0001 • USA

S2081-0006-20 1/2012

www.simplexgrinnell.com

© 2012 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

Features

Remote LCD annunciator for use with Simplex® model 4010ES fire alarm control panels

LCD readout provides:

- Two lines of 40 characters each
- Wide viewing angle, super-twist design
- LED backlighting

Control switches and status LEDs for:

- Alarm, Priority 2, Supervisory, or Trouble acknowledge (keyswitch access controlled)
- Alarm silence, System reset
- Three programmable control switches with yellow LEDs and provisions for custom labeling

Additional features:

- Information is transmitted over a single unshielded twisted pair; separate wiring is required for 24 VDC control panel power (see p. 3 for more information)
- Tone-alert sounder provides local audible indication
- Lamp and LCD are functionally tested each time the keyswitch is turned on
- Mounts flush on standard 6-gang electrical box
- Up to up to 20 internal and external card addresses per 4010ES fire alarm control panel


Mounting and trim options (ordered separately, see page 3 for more details):

- Surface mount box model 2975-9206
- Brushed stainless steel trim model 4603-9111

Description

Local Annunciation. 4606-9102 LCD Annunciator allows 4010ES fire alarm control panels to provide information and control switches at convenient locations away from the control panel. The LCD is an 80 character, back-lit, alphanumeric display with information presented in clear and descriptive English. Typical content includes: point status (alarm, trouble, etc.), alarm type (smoke detector, manual station, etc.), number of system alarms, supervisory conditions, troubles, and custom location labels up to 40 characters long.

Communications. Data communications require a single unshielded twisted pair that supports other annunciators on the same communications channel.

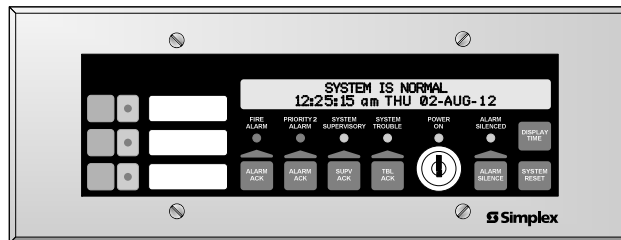

4606-9102 LCD Annunciator

Description (Continued)

Indications. Alarm, Priority 2, Supervisory, and Trouble conditions are also indicated by dedicated LEDs and a tone-alert audible indication. Each condition has a dedicated acknowledge push-button switch that silences the tone-alert but leaves the LED on until all conditions in that category are restored to normal.

Activity Scrolling. Repeated operation of the appropriate acknowledge switch will scroll the LCD display showing activity in the sequence of occurrence. The internal tone-alert also sounds to indicate the operation of any of the push-button switches.

Operation

Keyswitch Access. All switches on the annunciator are controlled by the "ENABLE" keyswitch with a key that is removable only in the disabled position. A brief Lamp/LCD test is performed whenever the keyswitch is changed from enabled to disabled.


Enabled Operations. When enabled, notification appliances can be deactivated by pressing the "ALARM SILENCE" switch. Pressing the "SYSTEM RESET" switch restores the system to normal operation. When system activity is normal, the LCD displays the time, date, and "SYSTEM IS NORMAL."

* This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7300-0026:0370 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. NYC Fire Dept COA #6095. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.

Product Selection

Model	Description	
➔ 4606-9102	Remote LCD Annunciator with beige trim for use with 4010ES fire alarm control panels	Refer to specifications on page 3 for additional details
4603-9111	Brushed stainless steel trim option	
➔ 2975-9206	Matching surface mount box; ivory finish	
2081-9044	Overvoltage protector; required where annunciator communications and power wiring exits and enters a building; refer to data sheet S2081-0016 for details	

4606-9102 Operator Information

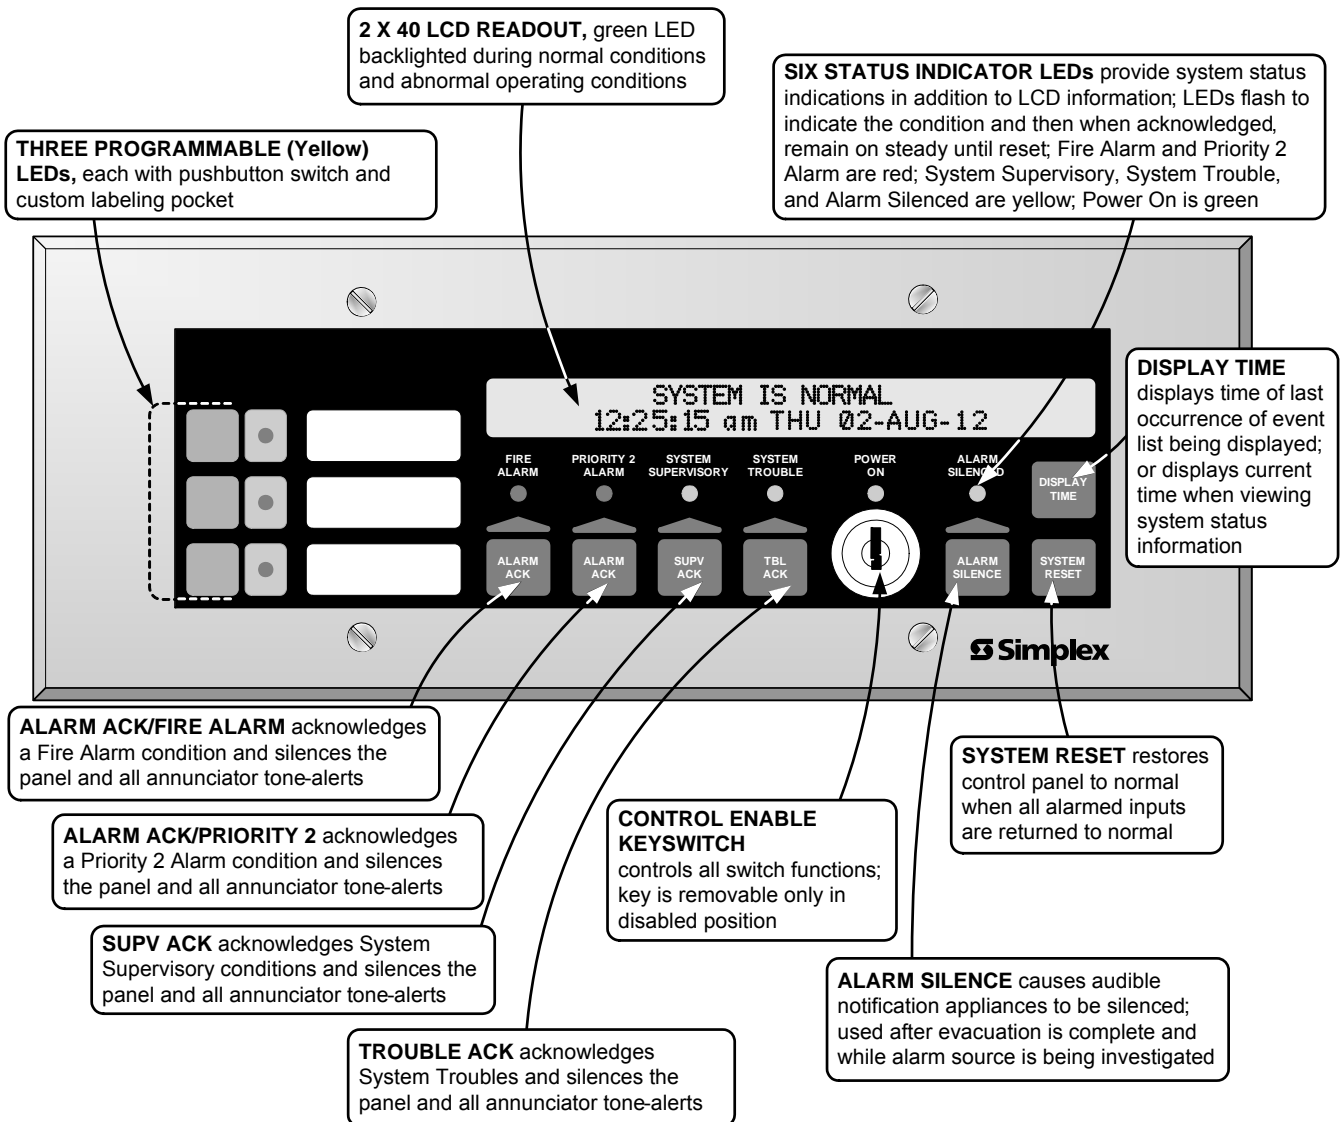

4606-9102 LCD Annunciator Specifications

General Operating Specifications (refer to Installation Instructions 579-977 for additional information)

Voltage	18 to 32 VDC, system supplied
Normal Operating Current	110 mA (with LED backlighting on)
Battery Standby Current	65 mA (during battery backup, LED backlighting is turned off after 30 seconds without switch activity)
Alarm Current	140 mA maximum (LED backlighting is on and tone-alert is sounding)
Operating Temperature Range	32° to 120° F (0° to 49° C)
Operating Humidity Range	Up to 93% RH, non-condensing at 100° F (38° C)

Communications

For 4010ES Panels*	Type	RUI (Remote Unit Interface) external annunciator communications line SLC (signaling line circuit)
	Capacity	Up to 20 total internal and external card addresses

Wiring Requirements

RUI Data	Standard Wiring Type	Unshielded twisted pair (UTP), 18 AWG (0.82 mm ²) for most applications, see below
	Wiring Characteristics	0.58 µF (580 nF) maximum capacitance between conductors; 35 Ω maximum total line resistance
	Wiring Applications Requiring Shielded, Twisted Pair (STP)	<ol style="list-style-type: none"> 1. Wiring that leaves the building. Also requires Isolated Loop Circuit Protectors on each end, refer to data sheet S2081-0007 for 2081-9027 (200 mA), or S2081-0008 for 2081-9028 (5 A) 2. Wiring run in 500 ft (152 m) or more of conduit. 3. Wiring closely bundled with standard IDNet communications or TrueAlert addressable communications (not required when run with IDNet+ communications).
	Class B "T-Tap" wiring distance	Up to 10,000 ft (3048 m) total wiring; up to 2500 ft (762 m) to farthest device
	Class X wiring distance	Up to 2500 ft (762 m)
Power Wiring	18 to 12 AWG (0.82 mm ² to 3.31 mm ²) wires for 24 VDC system power	
Earth Wiring	A dedicated earth ground connection to the electrical box is required for proper ESD and EMI protection; wire in accordance with NFPA 70 (<i>National Electrical Code</i>) Article 250	

Mounting Information

Trim Dimensions	4 ½" H x 11 13/16" W (114 mm x 300 mm)	
Assembly Depth	1 5/16" (33 mm), 1 ½" at terminal block location (38 mm)	
Standard Trim Finish	Steel, painted beige	
4603-9111, Optional Trim	Brushed stainless steel (ordered separately); supplied with both slotted and tamper resistant screws	
Boxes for Flush Mounting (supplied separately)	Masonry boxes	Six-gang box, RACO # 965, 3 ½" (89 mm) deep or equal
	Single gang boxes	Six, single gang boxes, 3 ½" (89 mm) deep minimum, RACO # 590 or equal
	Box selection note	Conduit entrance is box dependent, refer to Installation Instructions 579-977 for additional mounting information and conduit entry requirements


2975-9206, Surface Mount Box Option (ordered separately)

Dimensions	12" W x 4 5/8" H x 2 3/4" D (305 mm x 117 mm x 70 mm)
Finish	Painted steel, ivory finish

* Refer to the 4010ES control panel data sheet for additional panel information.

Mounting Information


Note: Review box choice with assembly layout before selecting conduit entrance location to allow easy access to terminals

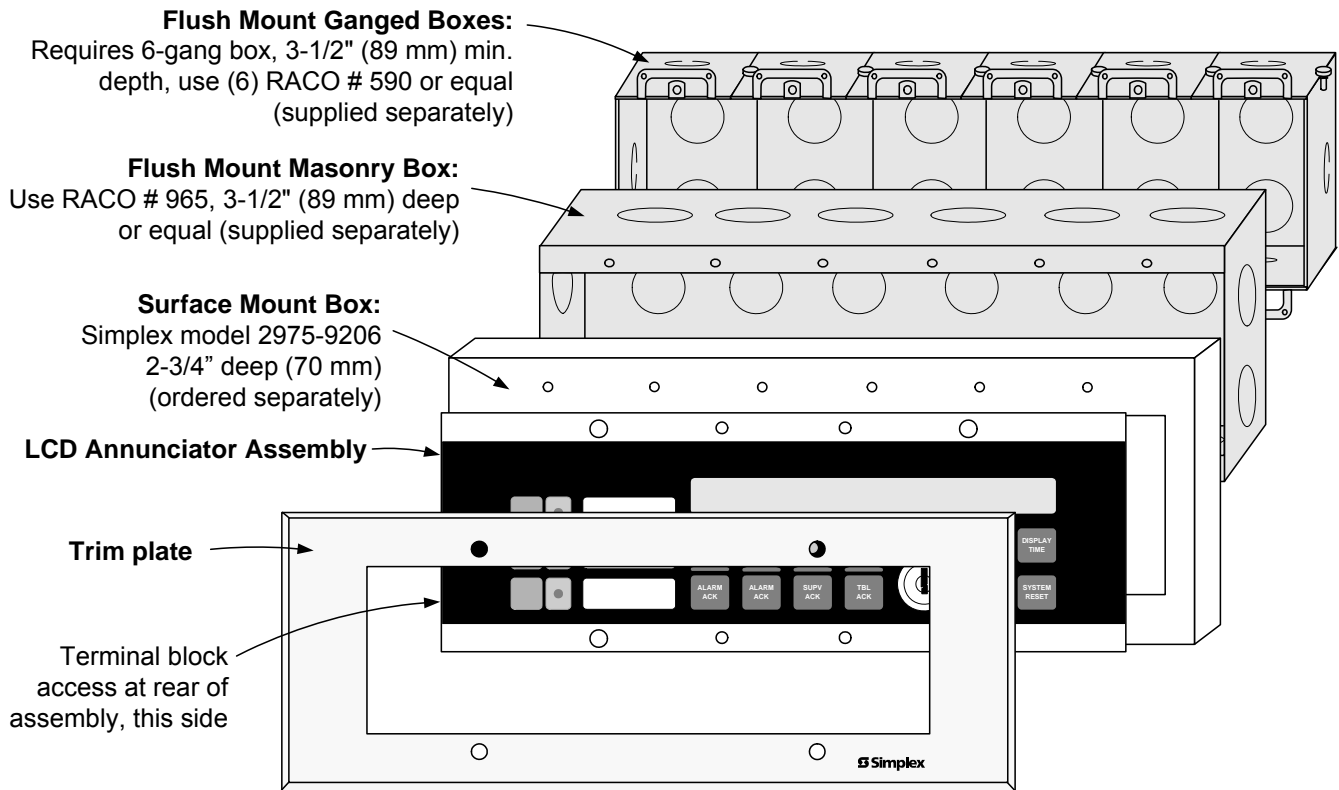

Wiring Reference

Interconnection Wiring Notes:

1. Communications require 18 to 12 AWG unshielded twisted pair.
2. Power requires two, 18 to 12 AWG wires for 24 VDC system power, plus Earth Ground to each electrical box.
3. Refer to Installation Instructions 579-977 for additional wiring specifications.

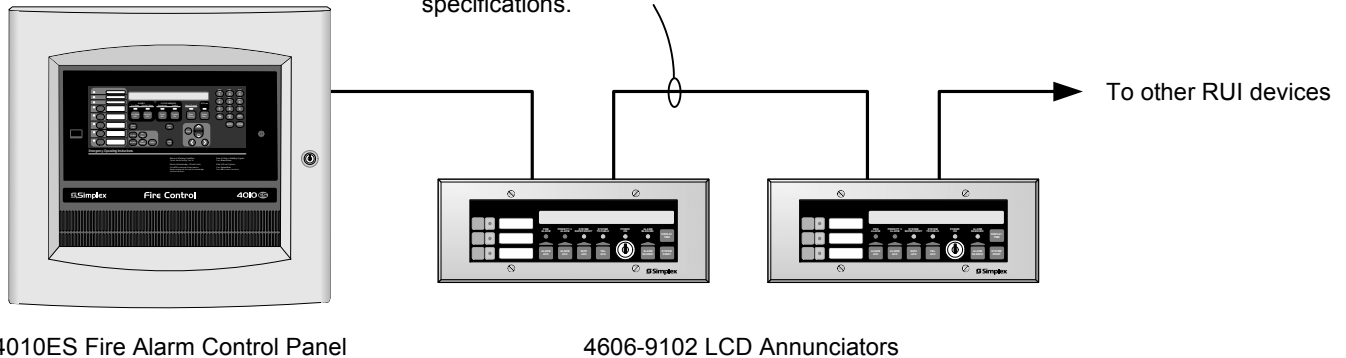

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. National Electrical Code and NFPA are registered trademarks of the National Fire Protection Association (NFPA).



Tyco Fire Protection Products • Westminister, MA • 01441-0001 • USA

S4606-0002-5 8/2012

www.simplexgrinnell.com

© 2012 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

INSERT 3

INITIATING/ADDRESSABLE DEVICES &
ACCESSORIES

Features

Individually addressable manual fire alarm stations with:

- Power and data supplied via IDNet or MAPNET II addressable communications using a single wire pair
- Operation that complies with ADA requirements
- The NO GRIP Single Action Station and Retrofit Kit are available with a more easily operated pull lever for applications where anticipated users may find the standard station lever difficult to activate
- Pull lever that protrudes when alarmed
- Break-rod supplied (use is optional)
- Models are available with single or double action (breakglass or push) operation
- UL listed to Standard 38

Compatible with the following Simplex® control panels:

- Model Series 4100ES, 4010ES, 4008, 4010, 4100U, 4020, 4100, and 4120 fire alarm control panels equipped with either IDNet or MAPNET II communications
- Model Series 2120 Communicating Device Transponders (CDTs) equipped with MAPNET II communications

Compact construction:

- Electronics module enclosure minimizes dust infiltration
- Allows mounting in standard electrical boxes
- Screw terminals for wiring connections

Tamper resistant reset key lock (keyed same as Simplex fire alarm cabinets)


Multiple mounting options:

- Surface or semi-flush with standard boxes or matching Simplex boxes
- Flush mount adapter kit
- Adapters are available for retrofitting to commonly available existing boxes


Description

The Simplex addressable manual station combines the familiar Simplex manual station housing with a compact communication module that is easily installed to satisfy demanding applications. Its integral individual addressable module (IAM) constantly monitors status and communicates changes to the connected control panel via IDNet or MAPNET II communications wiring.


* Refer to page 2 for specific model listings. This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7150-0026:224 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. Accepted for use – City of New York Department of Buildings – MEA35-93E. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.

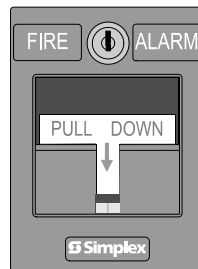


4099-9001
Single action

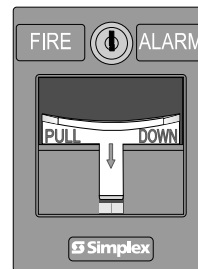


4099-9020
NO GRIP
Single action



4099-9805
NO GRIP
Retrofit kit

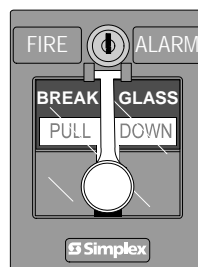

4099-9002
Breakglass

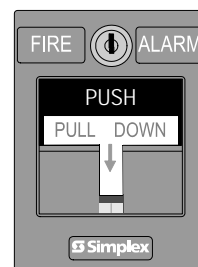

4099-9003
Push



With 2099-9828
Institutional
Cover kit

Operation

Activation of the 4099-9001 single action manual station requires a firm downward pull to activate the alarm switch. Completing the action breaks an internal plastic break-rod (visible below the pull lever, use is optional). The use of a break-rod can be a deterrent to vandalism without interfering with the minimum pull requirements needed for easy activation. The pull lever latches into the alarm position and remains extended out of the housing to provide a visible indication.

Single Action NO GRIP Station 4099-9020. For applications such as California Building Code, Title 24, which requires “Controls and operating mechanisms shall be operable with one hand and shall not require tight grasping, pinching or twisting of the wrist” the model 4099-9020 station provides a more easily operated pull lever compared to standard stations. Retrofit of existing stations is available using the 4099-9805 Retrofit kit.

Double Action Stations (Breakglass) require the operator to strike the front mounted hammer to break the glass and expose the recessed pull lever. The pull lever then operates as a single action station.

Double Action Stations (Push Type) require that a spring loaded interference plate (marked PUSH) be pushed back to access the pull lever of the single action station.

Station reset requires the use of a key to reset the manual station lever and deactivate the alarm switch. (If the break-rod is used, it must be replaced.)

Station testing is performed by physical activation of the pull lever. Electrical testing can be also performed by unlocking the station housing to activate the alarm switch.

Addressable Manual Station Product Selection

Addressable Manual Stations, Red Housing with White Letters and White Pull Lever

Model	Description	Housing	Pull Lever	Listings
4099-9001	Single action, English	FIRE ALARM	PULL DOWN	UL, ULC, FM, CSFM, MEA
4099-9001CB	Single action, Bilingual English and French	FEU FIRE	TIREZ PULL	ULC, FM
4099-9001CF	Single action, French	ALARME FEU	ABAISSÉZ	
4099-9002	Double action, Breakglass operation, English	FIRE ALARM	PULL DOWN	UL, ULC, FM, CSFM, MEA
4099-9003	Double action, Push operation, English			
4099-9020	Single action NO GRIP operation, English	FIRE ALARM	PULL DOWN	UL, ULC, FM, CSFM

Accessories

Model	Description	
2975-9178	Surface mount steel box, red	Refer to page 3 for dimensions
2975-9022	Cast aluminum surface mount box, red	
2099-9813	Semi-flush trim plate for double gang switch box, red	Typically for retrofit, refer to page 4
2099-9814	Surface trim plate for Wiremold box V5744-2, red	
2099-9819	Flush mount adapter kit, black	Refer to page 4 for details
2099-9820	Flush mount adapter kit, beige	
2099-9803	Replacement breakglass	
2099-9804	Replacement break-rod	
2099-9828	Institutional cover kit for field installation on 4099-9001	
4099-9805	Retrofit Kit for field conversion of a single action station to a NO GRIP station; refer to Installation Instructions 579-1007 for details	

Specifications (refer to Installation Instructions 574-332 for additional information)

Power and Communications	IDNet or MAPNET II communications, 1 address per station
Address Means	DIP switch, 8 position
Wire Connections	Screw terminal for in/out wiring, for 18 to 14 AWG wire
UL Listed Temperature Range	32° to 120° F (0° to 49° C) intended for indoor operation
Humidity Range	Up to 93% RH at 100° F (38° F)
Housing Color	Red with white raised lettering
Material	Housing and pull lever are Lexan polycarbonate or equal
Pull Lever Color	White with red raised lettering
Housing Dimensions	5" H x 3-3/4" W x 1" D (127 mm x 95 mm x 25 mm)


Addressable Manual Station Semi-Flush Mounting

Single Gang Box Mount

Single gang box, 2-1/2" deep (64 mm), RACO #500 or equal (supplied by others)

4" Square Box Mount


4" (102 mm) square box, 2-1/8" (54 mm) minimum depth, RACO #231 or equal (supplied by others)

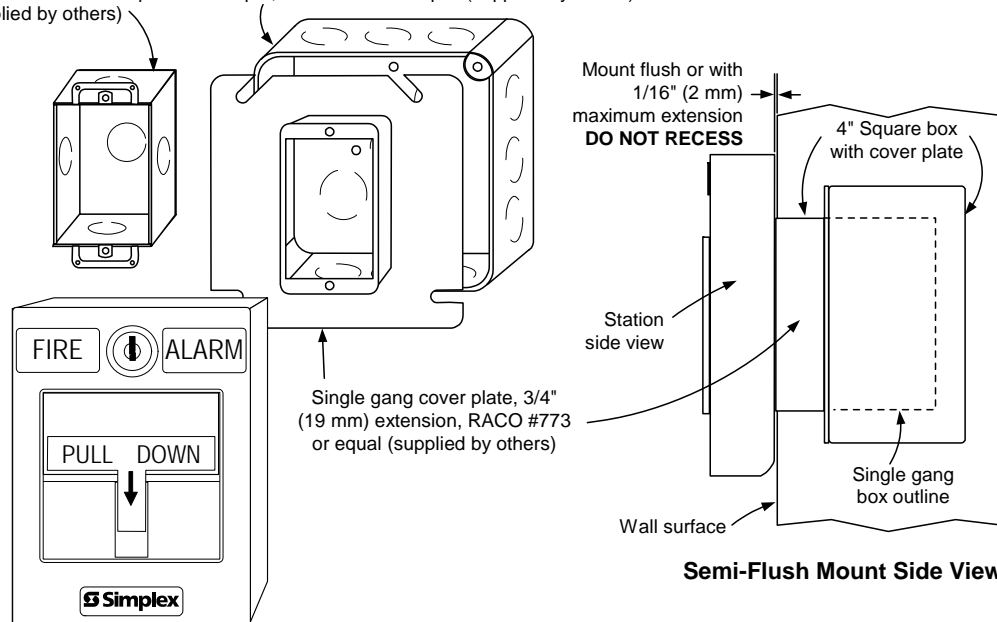


Addressable Manual Stations Surface Mounting

Preferred Mounting. For surface mounting of these addressable manual stations, the preferred electrical boxes are shown in the illustration to the right.

Additional Mounting Reference. Refer to page 4 for Wiremold box mounting compatibility.

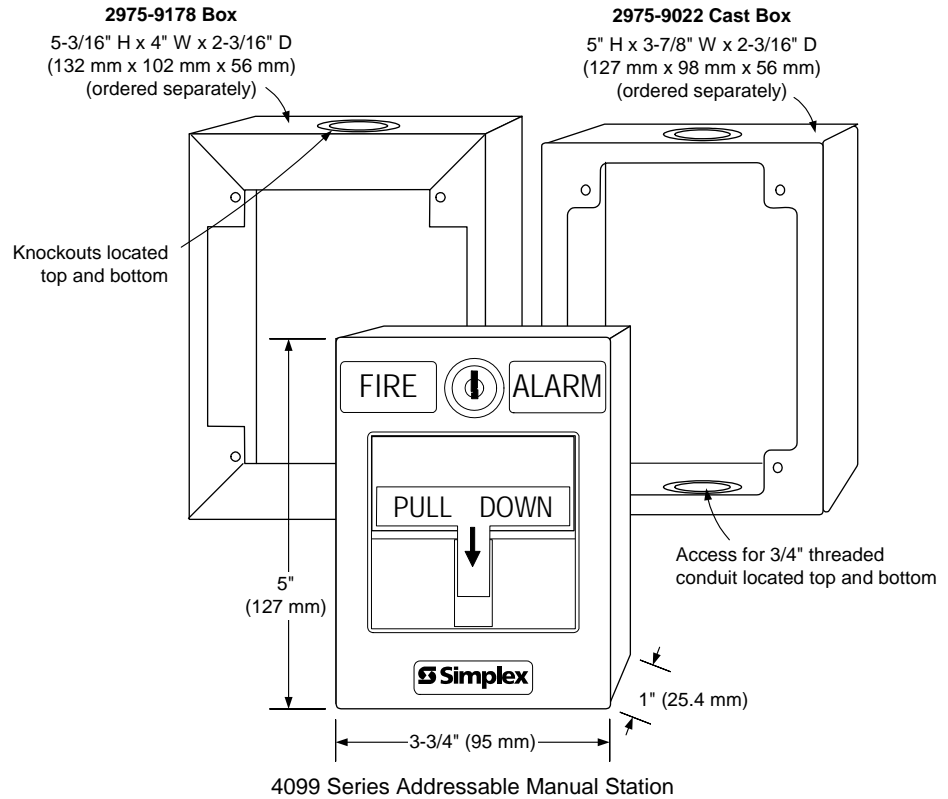

Surface Mount Side View with Internal Detail

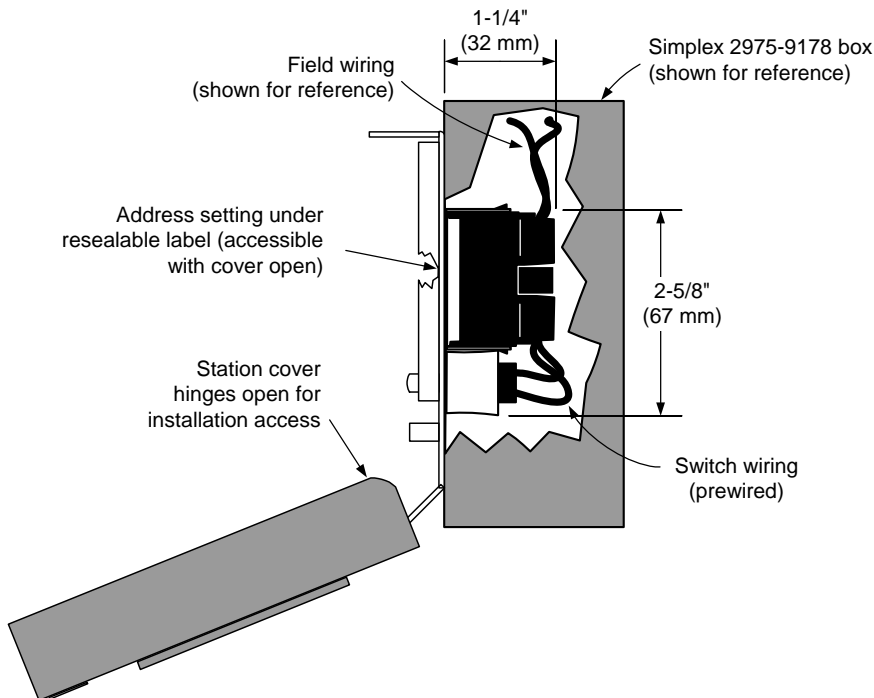


Application Reference

Refer to NFPA 72, the *National Fire Alarm and Signaling Code*, and all applicable local codes for complete requirements for manual stations. The following summarizes the basic requirements.


1. Stations shall be located in the normal path of exit and distributed in the protected area such that they are unobstructed and readily accessible.
2. Mounting shall be with the operable part not less than 42 in (1.07 m) and not more than 48 in (1.22 m) above floor level.
3. At least one station shall be provided on each floor. Additional stations shall be provided to obtain a travel distance not more than 200 ft (61 m) to the nearest station from any point in the building.
4. When manual station coverage appears limited in any way, additional stations should be installed.

Addressable Manual Station, Additional Mounting Information

For retrofit and new installations, additional compatible mounting boxes and the required adapter plates are shown in the illustration to the right.

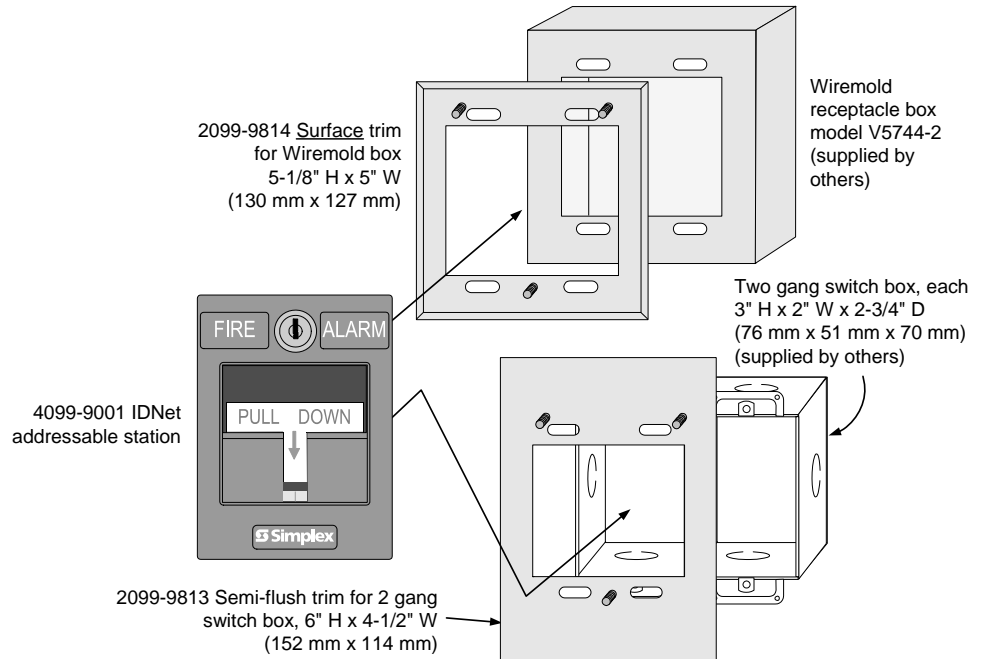

Addressable Manual Station, Flush Mounting Information

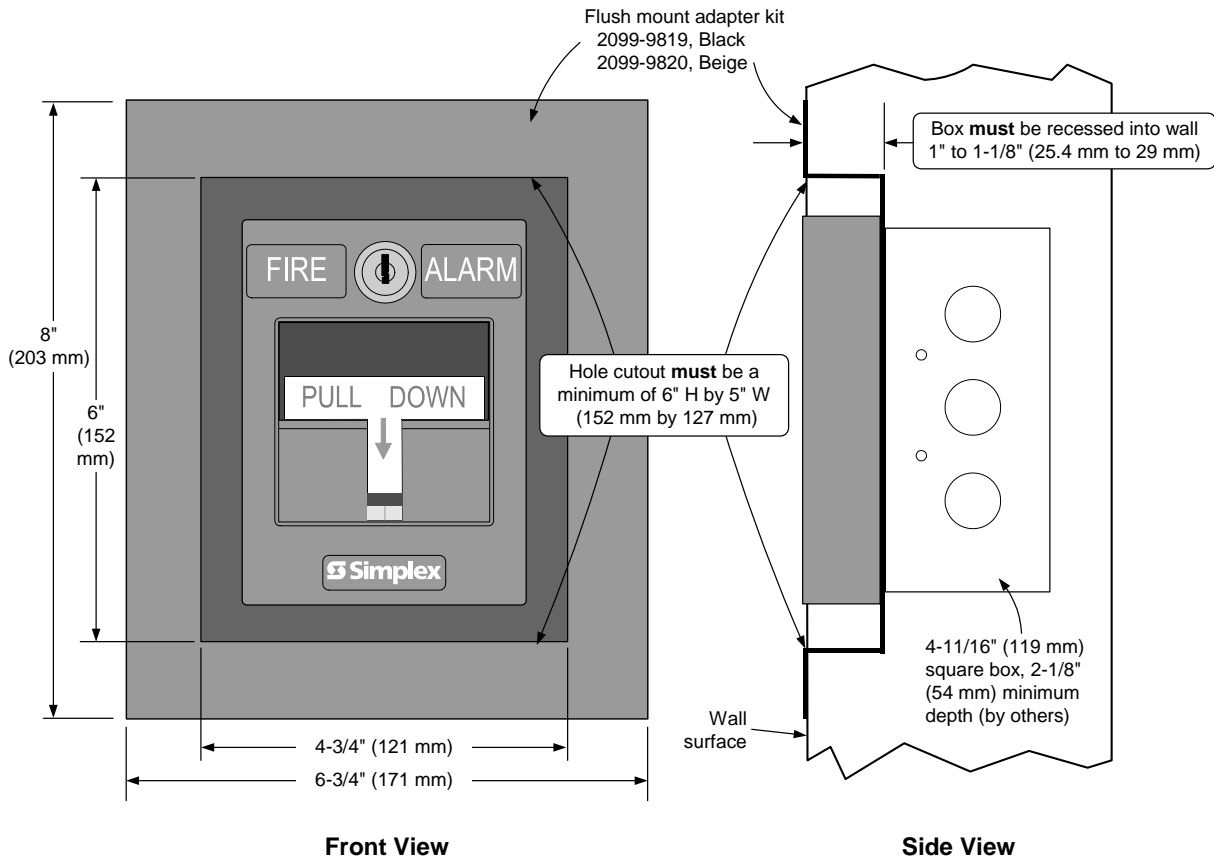

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. NFPA 72 and National Fire Alarm and Signaling Code are trademarks of the National Fire Protection Association (NFPA). Lexan is a trademark of the General Electric Co. Wiremold is a trademark of the Wiremold Company.

Features

TrueAlarm analog sensing provides:

- Digital transmission of analog sensor values via IDNet or MAPNET II two-wire communications

For use with the following Simplex® products:

- 4100ES, 4100U, 4010ES, and 4010 Series control panels; and 4008 Series control panels with reduced feature set (refer to data sheet S4008-0001 for details)
- 4020, 4100, and 4120 Series control panels, Universal Transponders, and 2120 TrueAlarm CDTs equipped for MAPNET II operation

Fire alarm control panel provides:

- Peak value logging allowing accurate analysis of each sensor for individual sensitivity selection
- Sensitivity monitoring satisfying NFPA 72 sensitivity testing requirements; automatic individual sensor calibration check verifies sensor integrity
- Automatic environmental compensation, multi-stage alarm operation, and display of sensitivity directly in percent per foot
- Ability to display and print detailed sensor information in plain English language

Photoelectric smoke sensors provide:

- Seven levels of sensitivity from 0.2% to 3.7% (refer to additional information on page 3)

Heat sensors provide:

- Fixed temperature sensing
- Rate-of-rise temperature sensing
- Utility temperature sensing
- Listed to UL 521 and ULC-S530


General features:

- Listed to UL 268 and ULC-S529
- Louvered smoke sensor design enhances smoke capture by directing flow to chamber; entrance areas are minimally visible when ceiling mounted
- Designed for EMI compatibility
- Magnetic test feature is provided
- Different bases are available to support a supervised or unsupervised output relay, and/or a remote LED alarm indicator

Additional base reference:

- For isolator bases, refer to data sheet S4098-0025
- For sounder bases, refer to data sheet S4098-0028
- For photo/heat sensors, refer to data sheet S4098-0024 (single address) and S4098-0033 (dual address)

* These products have been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listings 7272-0026:218, 7271-0026:231, 7270-0026:216, and 7300-0026:217 for allowable values and/or conditions concerning material presented in this document. Accepted for use – City of New York Department of Buildings – MEA35-93E. Additional listings may be applicable, contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.

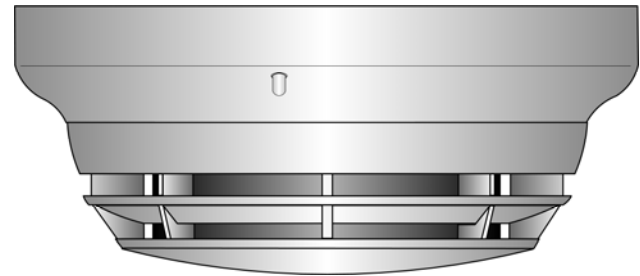

4098-9714 TrueAlarm Photoelectric
Sensor Mounted in Base

Description

Digital Communication of Analog Sensing.

TrueAlarm analog sensors provide an analog measurement digitally communicated to the host control panel using Simplex addressable communications. At the control panel, the data is analyzed and an average value is determined and stored. An alarm or other abnormal condition is determined by comparing the sensor's present value against its average value and time.

Intelligent Data Evaluation. Monitoring each sensor's average value provides a continuously shifting reference point. This software filtering process compensates for environmental factors (dust, dirt, etc.) and component aging, providing an accurate reference for evaluating new activity. With this filtering, there is a significant reduction in the probability of false or nuisance alarms caused by shifts in sensitivity, either up or down.

Control Panel Selection. Peak activity per sensor is stored to assist in evaluating specific locations. The alarm set point for each TrueAlarm sensor is determined at the host control panel, selectable as more or less sensitive as the individual application requires.

Timed/Multi-Stage Selection. Sensor alarm set points can be programmed for timed automatic sensitivity selection (such as more sensitive at night, less sensitive during day). Control panel programming can also provide multi-stage operation per sensor. For example, a 0.2% level may cause a warning to prompt investigation while a 2.5% level may initiate an alarm.

Sensor Alarm and Trouble LED Indication. Each sensor base's LED pulses to indicate communications with the panel. If the control panel determines a sensor is in alarm, or is dirty or has some other type of trouble, the details are annunciated at the control panel and that sensor base's LED will be turned on steadily. During a system alarm, the control panel will control the LEDs such that an LED indicating a trouble will return to pulsing to help identify the alarmed sensors.

TrueAlarm Sensor Bases and Accessories

Sensor Base Features

Base mounted address selection:

- Address remains with its programmed location
- Accessible from front (DIP switch under sensor)

General features:

- Automatic identification provides default sensitivity when substituting sensor types
- Integral red LED for power-on (pulsing), or alarm or trouble (steady on)
- Locking anti-tamper design mounts on standard outlet box
- Magnetically operated functional test

Sensor Bases

4098-9792, Standard Sensor Base

4098-9789, Sensor Base with wired connections for:

- 2098-9808 Remote LED alarm indicator **or** 4098-9822 relay (relay is unsupervised and requires separate 24 VDC)

Supervised Relay Bases (not compatible with 2120 CDT):

- **4098-9791, 4-Wire Sensor Base**, use with remote or locally mounted 2098-9737 relay, requires separate 24 VDC
- **4098-9780, 2-Wire Sensor Base**, use with remote or locally mounted 4098-9860 relay, no separate power required
- Supervised relay operation is programmable and can be manually operated from control panel
- Includes wired connections for remote LED alarm indicator **or** 4098-9822 relay (relay is unsupervised and requires separate 24 VDC)

Sensor Base Options

2098-9737, Remote or local mount supervised relay:

- DPDT contacts for resistive/suppressed loads, power limited rating of 3 A @ 28 VDC; non-power limited rating of 3 A @ 120 VAC (requires external 24 VDC coil power)

4098-9860, Remote or local mount supervised relay:

- SPDT dry contacts, power limited rating of 2 A @ 30 VDC, resistive; non-power limited rating of 0.5 A @ 125 VAC, resistive

4098-9822, LED Annunciation Relay:

- Activates when base LED is on steady, indicating local alarm or trouble
- DPDT contacts for resistive/suppressed loads, power limited rating of 2 A @ 28 VDC; non-power limited rating of 1/2 A @ 120 VAC, (requires external 24 VDC coil power)

4098-9832, Adapter plate:

- Required for surface or semi-flush mounting to 4" square electrical box and for surface mounting to 4" octagonal box
- Can be used for cosmetic retrofitting to existing 6-3/8" diameter base product

2098-9808, Remote red LED Alarm Indicator:

- Mounts on single gang box (shown in illustration to right)



Description

TrueAlarm sensor bases contain integral addressable electronics that constantly monitor the status of the detachable photoelectric or heat sensors. Each sensor's output is digitized and transmitted to the system fire alarm control panel every four seconds.


Since TrueAlarm sensors use the same base, different sensor types can be easily interchanged to meet specific location requirements. This feature also allows intentional sensor substitution during building construction. When conditions are temporarily dusty, instead of covering the smoke sensors (causing them to be disabled), heat sensors may be installed without reprogramming the control panel. Although the control panel will indicate an incorrect sensor type, the heat sensor will operate at a default sensitivity providing heat detection for building protection at that location.

Mounting Reference

Electrical Box Requirements: (boxes are by others)


Without relay in the box: 4" octagonal or 4" square, 1-1/2" deep; single gang, 2" deep

With relay in the box: 4" octagonal or 4" square, 1-1/2" deep, with 1-1/2" extension ring

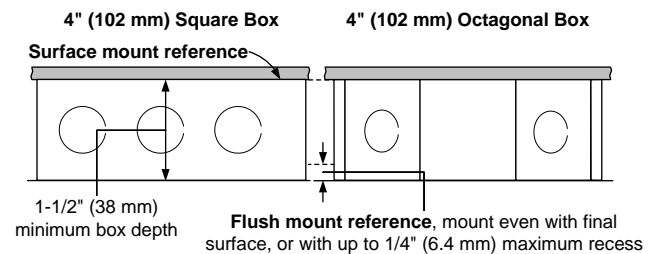


2098-9737 Supervised Relay (mounts in base electrical box or remotely)


4098-9822 Relay (mounts in base electrical box)

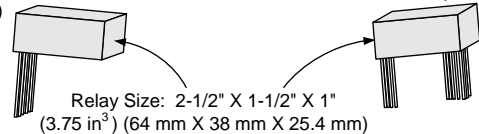

4098-9860 Supervised Relay (mounts in base electrical box or remotely; 2-3/8" X 1-1/4" X 11/32" (1 in³) (60.4 mm X 31.8 mm X 8.6 mm))



NOTE: Review total wire count, wire size, and accessories being wired to determine required box volume.

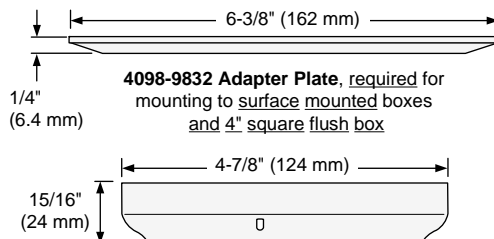

TrueAlarm Bases
4098-9780, 4098-9789, 4098-9791, & 4098-9792

TrueAlarm Sensors

Features

Sealed against rear air flow entry

Interchangeable mounting

EMI/RFI shielded electronics

Heat sensors:

- Selectable rate compensated, fixed temperature sensing with or without rate-of-rise operation
- Rated spacing distance between sensors:

Fixed Temp. Setting	UL & ULC Spacing	FM Spacing, Either Fixed Temperature Setting
135° F (57.2° C)	60 ft x 60 ft (18.3 m)	20 ft x 20 ft (6.1 m) for fixed temperature only; RTI = Quick
155° F (68° C)	40 ft x 40 ft (12.2 m)	50 ft x 50 ft (15.2 m) for fixed temperature with either rate-of-rise selection; RTI = Ultra Fast


Smoke Sensors:

- Photoelectric technology sensing
- 360° smoke entry for optimum response
- Built-in insect screens

4098-9714 Photoelectric Sensor

TrueAlarm photoelectric sensors use a stable, pulsed infrared LED light source and a silicon photodiode receiver to provide consistent and accurate low power smoke sensing. Seven levels of sensitivity are available for each individual sensor, ranging from 0.2% to 3.7% per foot of smoke obscuration. Sensitivities of 0.2%, 0.5%, and 1% are for special applications in clean areas. Standard sensitivities are 1.5%, 2.0%, 2.5%, 3.0%, and 3.7%. Application type and sensitivity are selected and then monitored at the fire alarm control panel.*

The sensor head design provides 360° smoke entry for optimum response to smoke from any direction. Due to its photoelectric operation, air velocity is not normally a factor, except for impact on area smoke flow.

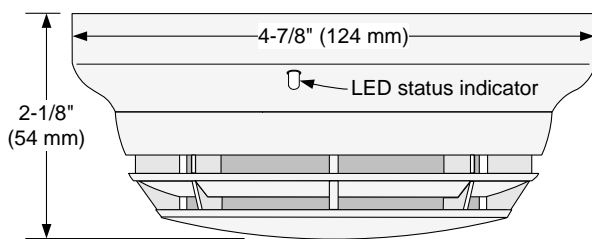


4098-9714 Photoelectric Sensor with Base

4098-9733 Heat Sensor

TrueAlarm heat sensors are self-restoring and provide rate compensated, fixed temperature sensing, selectable with or without rate-of-rise temperature sensing. Due to its small thermal mass, the sensor accurately and quickly measures the local temperature for analysis at the fire alarm control panel.

Rate-of-rise temperature detection is selectable at the control panel for either 15° F (8.3° C) or 20° F (11.1° C) per minute. Fixed temperature sensing is independent of rate-of-rise sensing and programmable to operate at 135° F (57.2° C) or 155° F (68° C). In a slow developing fire, the temperature may not increase rapidly enough to operate the rate-of-rise feature. However, an alarm will be initiated when the temperature reaches its rated fixed temperature setting.

TrueAlarm heat sensors can be programmed as a utility device to monitor for temperature extremes in the range from 32° F to 155° F (0° C to 68° C). This feature can provide freeze warnings or alert to HVAC system problems. Refer to specific panels for availability.

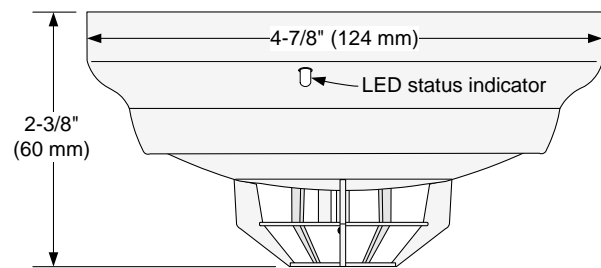

4098-9733 Heat Sensor with Base

WARNING: In most fires, hazardous levels of smoke and toxic gas can build up before a heat detection device would initiate an alarm. In cases where Life Safety is a factor, the use of smoke detection is highly recommended.

Application Reference

Sensor locations should be determined only after careful consideration of the physical layout and contents of the area to be protected. Refer to NFPA 72, the *National Fire Alarm and Signaling Code*. On smooth ceilings, smoke sensor spacing of 30 ft (9.1 m) may be used as a guide.*

* For detailed application information including sensitivity selection, refer to Installation Instructions 574-709.

TrueAlarm Analog Sensing Product Selection Chart

TrueAlarm Sensor Bases (for use with Sensors 4098-9714 and 4098-9733)

(Refer to Application Manual 574-709 and Installation Instructions 574-707 for additional information)

Model	Description	Compatibility	Mounting Requirements
4098-9792	Standard Sensor Base	No options	4" octagonal or 4" square box, 1-1/2" min. depth; or single gang box, 2" min. depth
4098-9789	Sensor Base with connections for Remote LED Alarm Indicator or Unsupervised Relay	2098-9808 Remote Alarm Indicator or 4098-9822 Unsupervised Relay	4" octagonal or 4" square box
4098-9791**	4-Wire Sensor Supervised Relay Base with connections for LED Indicator or Unsupervised Relay	2098-9737 Supervised Remote Relay 2098-9808 Remote Alarm Indicator or 4098-9822 Unsupervised Relay	Note: Box depth requirements depend on total wire count and wire size, refer to accessories list below for reference.
4098-9780**	2-Wire Sensor Supervised Relay Base with connections for LED Indicator or Unsupervised Relay	4098-9860 Supervised Remote Relay 2098-9808 Remote Alarm Indicator or 4098-9822 Unsupervised Relay	** NOTE: 4098-9791 and 4098-9780 are NOT compatible with the 2120 CDT

TrueAlarm Sensors

Model	Description	Compatibility	Mounting Requirements
4098-9714	Photoelectric Smoke Sensor	Bases 4098-9792, 4098-9789, 4098-9791, and 4098-9780	Refer to base requirements
4098-9733	Heat Sensor		

TrueAlarm Sensor/Base Accessories

Model	Description	Compatibility	Mounting Requirements
2098-9737	Supervised Relay, mounts remote or in base electrical box	For use with 4098-9791 base	Remote Mounting requires 4" octagonal or 4" square box, 1-1/2" minimum depth
4098-9860	Supervised Relay, mounts remote or in base electrical box	For use with 4098-9780 base	Base Mounting requires 4" octagonal box, 2-1/8" deep with 1-1/2" extension ring
2098-9808	Remote Red LED Alarm Indicator on single gang stainless steel plate	Bases 4098-9789, 4098-9791, and 4098-9780	Single gang box, 1-1/2" minimum depth
4098-9822	Unsupervised Relay, tracks base LED status; Note: Mounts only in base electrical box	Bases 4098-9789, 4098-9791, and 4098-9780	4" octagonal box, 2-1/8" deep with 1-1/2" extension ring
4098-9832	Adapter Plate	Bases 4098-9792, 4098-9789, 4098-9791, and 4098-9780	Required for surface or semi-flush mounted 4" square box and for surface mounted 4" octagonal box

Specifications

General Operating Specifications

Communications and Sensor Supervisory Power	IDNet or MAPNET II communications, auto-selected, 1 address per base
Communications Connections	Screw terminals for in/out wiring, 18 to 14 AWG (0.82 mm ² to 2.08 mm ²)
Remote LED Alarm Indicator Current	1 mA typical, no impact to alarm current
Remote LED Alarm Indicator and Relay Connections	Color coded wire leads, 18 AWG (0.82 mm ²)
UL Listed Operating Temperature Range	32° to 100° F (0° to 38° C)
Operating Temperature Range	with 4098-9733 Heat Sensor: 32° to 122° F (0° to 50° C) with 4098-9714 Smoke Sensor: 15° to 122° F (-9° to 50° C)
Storage Temperature Range	0° F to 140° F (-18° C to 60° C)
Humidity Range	10 to 95% RH
4098-9714 Smoke Sensor Air Velocity Rating	0-4000 ft/min (0-1220 m/min)
Housing Color	Frost White

4098-9791 Base With Supervised Remote Relay 2098-9737 (see page 2 for contact ratings)

Externally Supplied Relay Coil Voltage	18-32 VDC (nominal 24 VDC)
Supervisory Current	270 µA, from 24 VDC supply
Alarm Current with 2098-9737 Relay	28 mA, from 24 VDC supply

4098-9780 Base With Supervised Remote Relay 4098-9860 (see page 2 for contact ratings)

Power	Supplied from communications
-------	------------------------------

4098-9822 Unsupervised Relay, Requirements for Bases 4098-9789, 4098-9791, and 4098-9780 (see page 2 for contact ratings)

Externally Supplied Relay Coil Voltage	18-32 VDC (nominal 24 VDC)
Supervisory Current	Supplied from communications
Alarm Current	13 mA from separate 24 VDC supply

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. NFPA 72 and National Fire Alarm and Signaling Code are trademarks of the National Fire Protection Association (NFPA).



Tyco Fire Protection Products • Westminster, MA • 01441-0001 • USA

S4098-0019-18 6/2014

www.simplex-fire.com

© 2014 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

UL, ULC, CSFM Listed; FM Approved;
MEA (NYC) Acceptance*

Addressable Duct Sensor Housings with TrueAlarm
Photoelectric Sensor; Available with Multiple Relay Control

Features

Compact air duct sensor housing with clear cover to monitor for the presence of smoke**

Includes factory installed TrueAlarm photoelectric smoke sensor and features:

- Individual sensor information processed by the host control panel to determine sensor status
- Digital transmission of analog sensor values via IDNet or MAPNET II, 2-wire communications
- Programmable sensitivity, consistent accuracy, environmental compensation, status testing, and monitoring of sensor dirt accumulation

Model 4098-9755:

- Basic duct sensor housing (no relay output) powered by IDNet/MAPNET II communications

Model 4098-9756:

- Duct sensor housing with supervised output for multiple remote relays; requires separate 24 VDC; includes one relay
- Relay output is under panel control
- At the panel, relay output can be activated manually or in response to a separate alarm or other input

General features:

- UL listed to Standard 268A
- Clear cover allows visual inspection
- Test ports provide functional smoke testing access with cover in place
- Mounts to rectangular ducts or round ducts; minimum size is 8" (203 mm) square or 18" (457 mm) diameter
- Magnetic test feature for alarm initiation at housing
- Optional weatherproof enclosure is available separately (refer to data sheet S4098-0032)

Diagnostic LEDs (on interface board):

- Red Alarm/Trouble LED for sensor status and communications polling display
- Yellow LED for open or shorted trouble indication of supervised relay control (4098-9756 only)


Sampling tubes (ordered separately):

- Available in multiple lengths to match duct size
- Installed and serviced with housing in place


Remote module options (ordered separately):

- Remote red status/alarm LED (2098-9808)
- Remote test station with LED (2098-9806)
- 4098-9843 remote relays (refer to page 2 for details)


* These products have been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 3240-0026.241 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. Accepted for use – City of New York Department of Buildings – MEA35-93E. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.

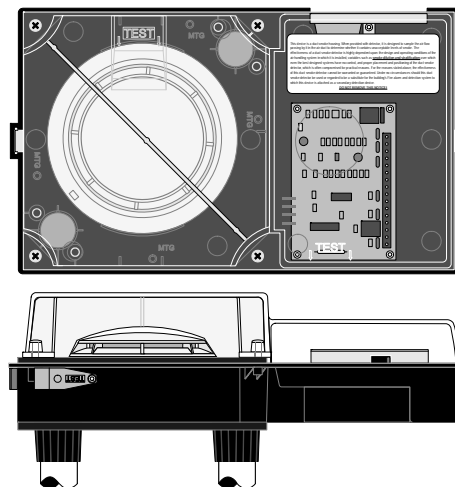

Duct Sensor Housing, Front and Bottom View



2098-9808



2098-9806

Remote Status/Alarm Indicator and Test Station

Introduction

Operation. Simplex® compact air duct smoke sensor housings provide TrueAlarm operation for the detection of smoke in air conditioning or ventilating ducts. Sampling tubes are installed into the duct allowing air to be directed to the smoke sensor mounted in the housing.

TrueAlarm Sensor Operation

Digital Communication of Analog Sensing.

Analog information from the sensor is digitally communicated to the control panel where it is analyzed. Sensor input is stored and tracked as an average value with an alarm or abnormal condition being determined by comparing the sensor's present value against its average.

Intelligent Data Evaluation. Monitoring each photoelectric sensor's average value provides a software filtering process that compensates for environmental factors (dust, dirt, etc.) and component aging, providing an accurate reference for evaluating new activity. The result is a significant reduction in the probability of false or nuisance alarms caused by shifts in sensitivity, either up or down.

** Please note that smoke detection in air ducts is intended to provide notification of the presence of smoke *in the duct*. It is not intended to, and will not, replace smoke detection requirements for open areas or other non-duct applications.

TrueAlarm Sensor Operation (Continued)

Control Panel Selection. Peak activity per sensor is stored to assist in evaluating specific locations. The alarm set point for each sensor is determined at the control panel, selectable as the individual application requires.

Sensor Status LED. Each sensor housing's red status LED (located on the electrical interface board) pulses to indicate communications with the panel. If the control panel determines that a sensor is in alarm, or that it is dirty or has some other type of trouble, the details are annunciated at the control panel and that sensor housing's status LED will be turned on steadily. During a system alarm, the control panel will control the LEDs such that an LED indicating a trouble will return to pulsing to help identify any alarmed sensors. (Remote Status/Alarm LEDs track the operation of the sensor housing LED.)

Photoelectric Sensing

TrueAlarm photoelectric sensors use a stable, pulsed infrared LED light source and a silicon photodiode receiver to provide consistent and accurate low power smoke sensing.

Duct Sensor Selection Chart

Duct Smoke Sensor Housing with Photoelectric Sensor*

Model	Description	Compatibility
4098-9755	Basic Duct Sensor Housing; operating power is supplied by either IDNet or MAPNET II communications (no relay output)	Simplex fire alarm control panel models: 4100ES, 4010ES, 4008, 4010, 4100U, and legacy products 4020, 4100/4100+, and 4120. Also 2120 CDT if configured for MAPNET II, TrueAlarm operation
➔ 4098-9756	Duct Sensor Housing with supervised multiple relay output, requires separate 24 VDC fire alarm power and 4081-9008 end-of-line resistor harness; includes one 4098-9843 relay	Same as above except relay operation is not compatible with 2120 CDT; Relay output is for up to 15 total 4098-9843 Relays (additional relays are ordered separately)

Remote LED Indicator and Test Station, Select One if Required

Model	Description	Compatibility	Mounting
2098-9808	Red LED status indicator on single-gang stainless steel plate	4098-9755 4098-9756	Use single gang box, 3" H x 2" W x 2" D (76 mm x 51 mm x 51 mm)
➔ 2098-9806	Test Station with keyswitch and red LED status indicator, on single-gang stainless steel plate; (turning switch to "TEST" initiates alarm for system testing)		

Epoxy Encapsulated Remote Relay and End-of-Line Resistor

Model	Description	Compatibility	Location
4098-9843	Relay; single Form C (7 A @ 120 VAC); refer to pages 3 and 4 for additional relay information; one included with 4098-9756; wiring is 18 AWG (0.82 mm ²) color coded wire leads	4098-9756 only; connect up to 15	Locate relays within 3 ft (1 m) of device being controlled per NFPA 72
4081-9008	End-of-Line Resistor Harness; 10 kΩ, 1/2 W; (ref. 733-894); required to supervise remote relay coil connection	4098-9756	At last relay location

* Each duct housing includes an internally mounted model 4098-9714 TrueAlarm photoelectric sensor and an exhaust tube. A correctly sized sampling tube (ordered per application) is required, refer to chart below.

Sampling Tube Selection Chart, Ordered Separately Per Duct Width, Select One

Overall Duct Width	Tube Required	Suggested Cut Length
12" (305 mm)	4098-9854	1/2" (12.7 mm) longer than duct width
13" to 23" (330 mm to 584 mm)	4098-9855	1/2" (12.7 mm) longer than duct width
24" to 46" (610 mm to 1168 mm)	➔ 4098-9856	3 in" (76 mm) longer than duct width
46" to 71" (1168 mm to 1803 mm)	4098-9857	3 in" (76 mm) longer than duct width
71" to 95" (1803 mm to 2413 mm)	4098-9858	3 in" (76 mm) longer than duct width

Photoelectric Sensing (Continued)


Typically duct sensor applications require less sensitive settings (such as 2.5% per foot obscuration) due to the ducts being a relative dirty environment. However, the standard seven levels of TrueAlarm sensor sensitivity are available for each individual sensor, ranging from 0.2% to 3.7% per foot of smoke obscuration. Sensitivity is selected and monitored at the fire alarm control panel.

Fire Alarm Control Panel Features



- Individual smoke sensitivity selection
- Sensitivity monitoring that satisfies NFPA 72 sensitivity testing requirements
- Peak value logging allows accurate analysis for sensitivity selection
- Automatic, once per minute individual sensor calibration check verifies sensor integrity
- Automatic environmental compensation
- Smoke sensitivity is displayed in percent per foot
- Ability to display and print detailed sensor information in plain English language
- Relays of model 4098-9756 are under panel control for ON, OFF, or override

Duct Sensor Housing Detail Reference



NOTE: Refer to Installation Instructions 574-776 for additional installation detail and maintenance information.

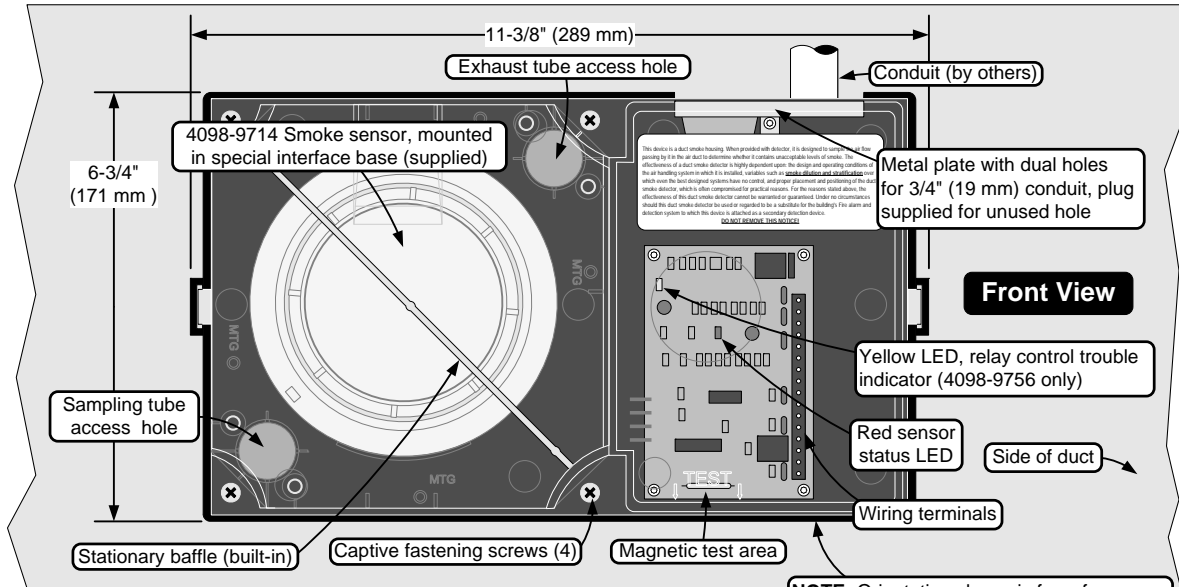


NOTE: Orientation shown is for reference only, refer to General Location Notes and End View illustration below for alternate mounting reference.

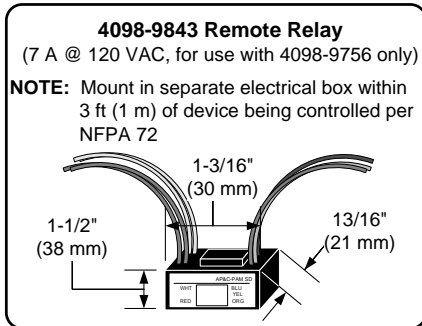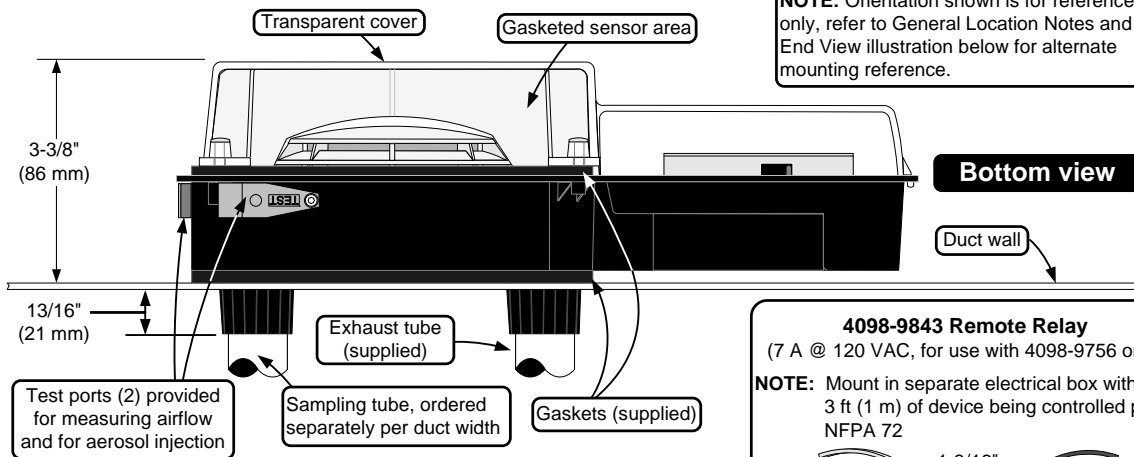

Sampling tube, keyed for proper hole alignment **with holes facing into airflow** (template is provided for proper tube installation). (Housing is shown as position 2 per note 2 below.)

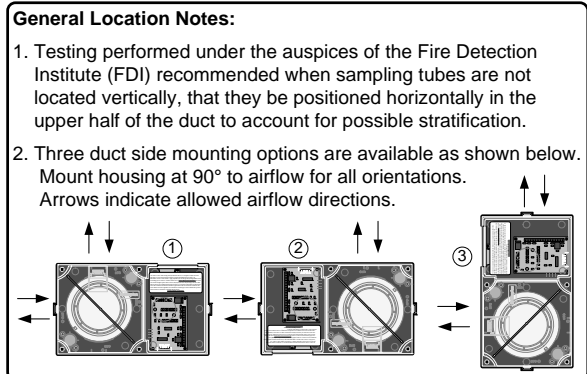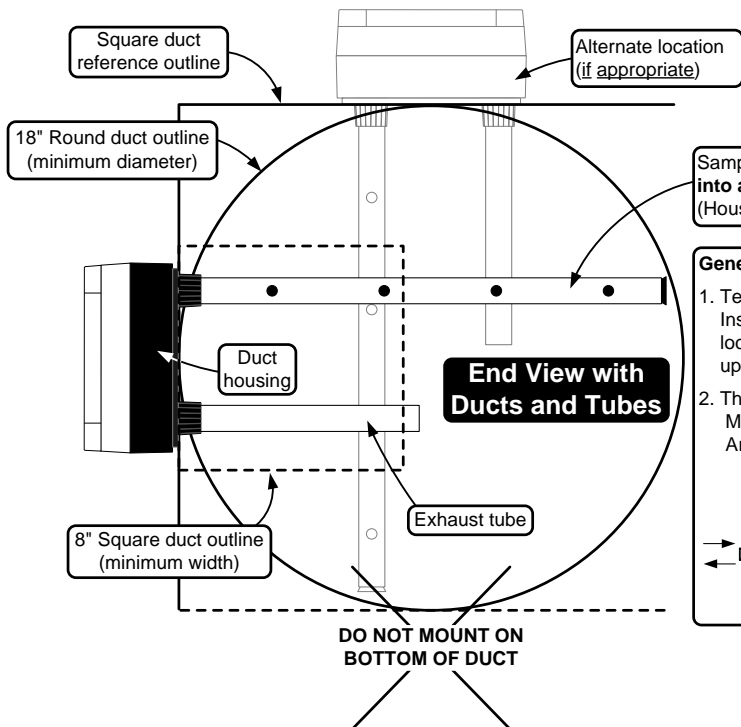

Duct Sensor Location Reference

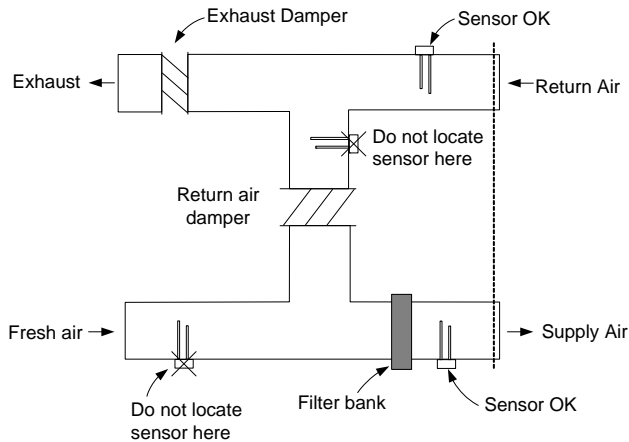

Additional Information. Refer to NFPA 90A, *Standard for the Installation of Air Conditioning and Ventilating Systems*; NFPA 72, the *National Fire Alarm and Signaling Code*; and the *NEMA Guide for Proper Use of Smoke Detectors in Duct Applications*, and Installation Instructions 574-776.

Duct Sensor Location Considerations:

1. Proper duct smoke detection location must ensure adequate airflow within the duct housing.
2. Duct air velocity rating is 300 to 4000 ft/min (91 to 1220 m/min). Pressure differential between intake and exhaust tubes is required to be between 0.015 to 1.55 inches of water (0.381 to 39.37 mm).
3. Ensure accessibility for test and service.
4. Proper Locations: downstream side of filters to detect fires in the filters; in return ducts, ahead of mixing areas; upstream of air humidifier and cooling coil.
5. Other locations and orientations may be required for proper duct smoke detection depending on duct access, system design, and duct airflow testing. Contact your local Simplex product supplier for assistance.

Locations to Avoid:

1. Where dampers closed for comfort control would interfere with airflow.
2. Next to outside air inlets (unless the intent is to monitor smoke entry from that area).
3. In return air damper branch ducts and mixing areas where airflow may be restricted.

Specifications

General Mechanical and Environmental

Air Velocity Range (linear ft/min)	300 to 4000 ft/min (91 to 1220 m/min)
Sensor Sensitivity Range	0.2% to 3.7% per foot of obscuration, selectable at host control panel
UL Listed Temperature Range	32° F to 100° F (0° C to 38° C)
Operating Temperature Range	32° F to 122° F (0° C to 50° C)
Storage Temperature Range	0° F to 140° F (-18° C to 60° C)
Humidity Range	10% to 95% RH, non-condensing
Wiring Connections	Terminal blocks, 18 to 12 AWG (0.82 mm ² to 3.31 mm ²)
Housing Color	Black base with clear cover

Remote Status/Alarm LED and Test Station with Remote Status/Alarm LED

Remote Alarm LED Current	1.2 mA, no impact to 24 VDC alarm current (2098-9808 or 2098-9806)
Test Station Keyswitch Current	3.3 mA, no impact to 24 VDC alarm current (2098-9806)
Remote Alarm LED and Test Station Distance	250 ft (76 m) maximum

Addressable Operation

Data Communications	IDNet or MAPNET II communications, auto-select, one address per housing; provides operating power to model 4098-9755
---------------------	--

Model 4098-9756 with Supervised Multiple Relay Control, Requires Separate Fused 24 VDC from Fire Alarm Power Supply

Input Voltage	18-32 VDC (24 VDC nominal)
Standby Current	3 mA @ 24 VDC
Alarm Current	15 mA @ 24 VDC; add 15 mA for each 4098-9843 relay
Supervised Remote Relay Control Output	For use with 4098-9843 relay only, quantity of 15 maximum; distance of 500 ft (152 m) maximum; requires 4081-9008 (ref. 733-894) 10 k Ω , 1/2 W end-of-line resistor

4098-9843 Relay Output Ratings, Single Form C, use with Model 4098-9756 Only

Coil Current	15 mA @ 24 VDC, up to 15 maximum per relay control output
Relay Contacts	7 A at 0.35 PF @ 28 VDC & 120 VAC; 250 μ A @ 5 VDC
Location Distance	500 ft (152 m) maximum to relay coils; locate relays within 3 ft (1 m) of device being controlled per NFPA 72

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. NFPA 72 and National Fire Alarm and Signaling Code are registered trademarks of the National Fire Protection Association (NFPA).



Tyco Fire Protection Products • Westminister, MA • 01441-0001 • USA

S4098-0030-9 11/2012

www.simplexgrinnell.com

© 2012 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

Features

IDNet or MAPNET II addressable communications supply both data and power over a single wire pair to provide:**

- Supervised Class B monitoring of normally open, dry contacts
- Total wiring distance from IAM to supervision resistor(s) of up to 500 ft (152 m)
- Monitored connection is compatible with Simplex® 2081-9044 Overvoltage Protectors for outdoor wiring or electrically noisy applications
- For use in indoor locations up to 158° F (70° C) such as attic spaces or similar applications

For use with following Simplex control panels:

- Model Series 4008, 4010, 4010ES, 4100U and 4100ES fire alarm control panels for IDNet communications
- Model Series 4100/4100U/4100ES, 4120, 4020, and 2120 Communicating Device Transponders (CDTs) equipped with MAPNET II communications

Model 4090-9001:

- Enclosed design minimizes dust infiltration
- Mounts in standard single gang electrical box
- Screw terminals for wiring connections
- Visible LED flashes to indicate communications
- Optional covers are available to allow LED to be viewed after installation (requires mounting bracket, ordered separately)

Model 4090-9051:

- Encapsulated design for extended exposure to high humidity (LED is not present on this model)
- Color coded 18 AWG leads for wiring

IDNet communications provides current limited monitoring:


- Provides monitoring of tamper switch (supervisory) and waterflow switch (alarm) on same circuit using one point
- Available with IDNet communications only

Multiple operation modes are available and are selectable at the control panel:


- Contact closure status can be tracked
- Momentary contact closure conditions can be selected at the panel to be latched or tracked (not available with the 2120 CDT)

UL listed to Standard 864

* These products have been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7300-0026:223 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. Accepted for use – City of New York Department of Buildings – MEA35-93E. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Safety Products Westminster.

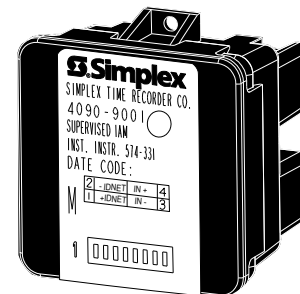

4090-9001 Supervised IAM
(shown approximately 3/4 size)

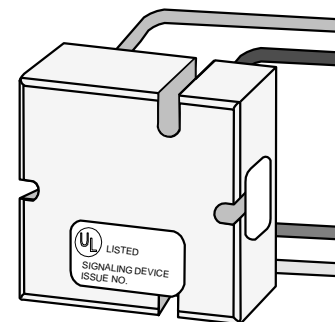

4090-9051 Supervised IAM
(shown approximately 3/4 size)

Description

Individual addressable modules (IAMs) receive both power and communications from a two-wire MAPNET II or IDNet circuit. They provide location specific addressability to a single initiating device (such as single station smoke detector alarm contacts or heat detector contacts) or multiple devices at the same location by monitoring normally open dry contacts and the wiring to an end-of-line resistor.

Model 4090-9001 is packaged in a thermoplastic housing and provides screw terminal connections and a status indicating LED.

Model 4090-9051 is an encapsulated package with wire leads. It does not provide a status indicating LED.

Operation

Contact Closure. Closure of the monitored contact(s) initiates an alarm or other response as programmed at the fire alarm control panel. An open in the monitored circuit wiring will cause a trouble to be reported.

Panel Selections. Selections can be made at the control panel to maintain the alarm condition if the initiating device contacts are momentary, such as from a rate-of-rise heat detector, or to track the device contact status (not available with the 2120 CDT).

Current Limited Operation Applications

For use with IDNet communications only, these IAMs can provide quad-state sensing of normal, open circuit, short circuit, and current limited conditions. (Program type is “T-sense.”) With the proper end-of-line and current limiting resistors, dual functions such as tamper switch and waterflow switch monitoring can be determined and communicated by a single addressable point.

IAM Product Selection

Model	Description
4090-9001	Supervised IAM, mounted in thermoplastic housing with screw terminals; see applicable options below
4090-9051	Supervised IAM, encapsulated with wire leads

Optional Trim Plates and Mounting Bracket for Model 4090-9001

Model	Description
4090-9806	For semi-flush mounted box
4090-9807	For surface mounted box
4090-9810	Mounting bracket, mounts IAM to electrical box and provides screw holes for trim plate, required for optional trim plates

Trim plate with LED viewing window, requires 4090-9810 mounting bracket, includes mounting screws; galvanized steel

End-of-Line Resistor Harnesses (ordered separately as required)

Model	Reference No.	Description
4081-9004	733-886	6.8 kΩ, 1/2 W; Standard end-of-line resistor harness for N.O. contact supervision
4081-9003	733-896	4.7 kΩ, 1/2 W
4081-9005	733-984	1.8 kΩ, 1/2 W

Use for current limited monitoring applications

Specifications

Electrical

Power and Communications	MAPNET II or IDNet, auto selected, 1 address per IAM	
Input Requirements	Normally open, dry contacts	
Wire Connections	4090-9001	Screw terminals for in/out wiring, 18 to 14 AWG wire (0.82 mm ² to 2.08 mm ²)
	4090-9051	Color coded wire leads, 18 AWG (0.82 mm ²), 8" long (203 mm)
Reference Documents	Installation Instructions	574-331 for 4090-9001; 579-572 for 4090-9151
	Field Wiring Diagrams	842-073 for IDNet operation; 841-804 for MAPNET II operation


Wiring Distances

Distance from IAM to Contacts	500 ft (152 m) maximum without protectors
	400 ft (122 m) maximum with 2081-9044 Overvoltage Protectors
Wiring Distance Reference per channel, MAPNET II or IDNet Communications	2500 ft (762 m) maximum from fire alarm control panel
	10,000 ft (3048 m) maximum total wiring distance (including T-Taps)


Mechanical

Dimensions	4090-9001	1-9/16" W x 1-3/4" H x 1-1/4" D (40 mm x 44 mm x 32 mm)
	4090-9051	1-9/16" W x 1-9/16" H x 9/16" D (40 mm x 40 mm x 14 mm)
Housing Material, 4090-9001	Black thermoplastic	
Encapsulation Material, 4090-9051	Epoxy, beige	
Temperature Range	32° to 158° F (0° to 70° C); intended for indoor operation	
Humidity Range	Up to 93% RH at 100° F (38° C)	

Mounting Information

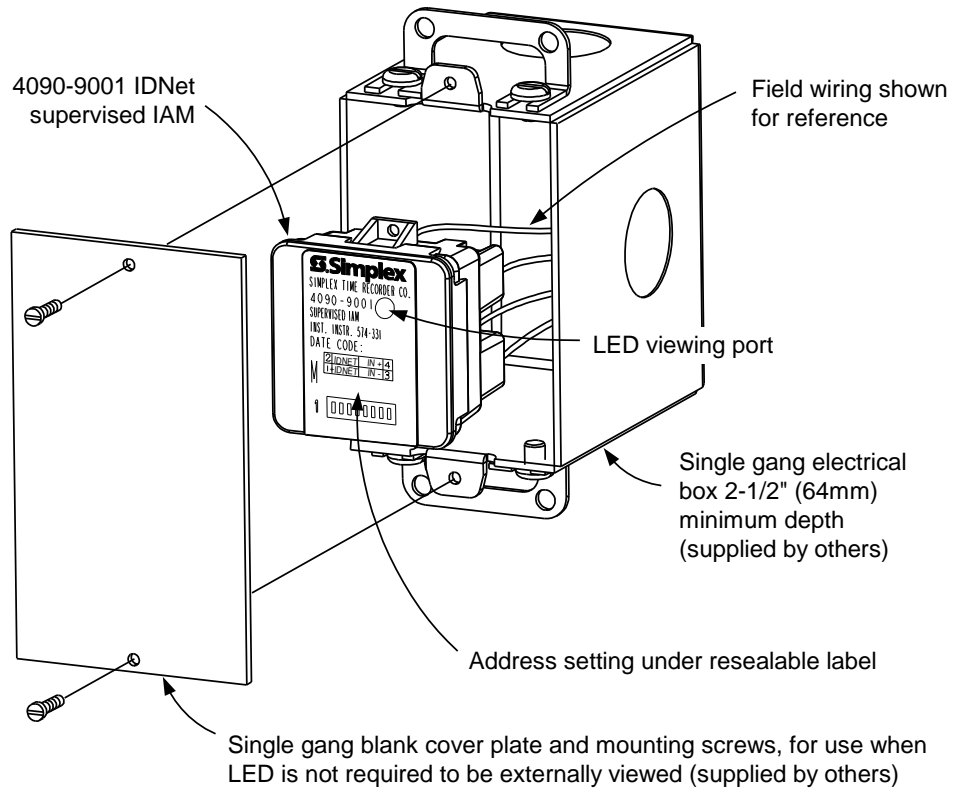


Mounting Reference, Single Gang Blank Cover Plate

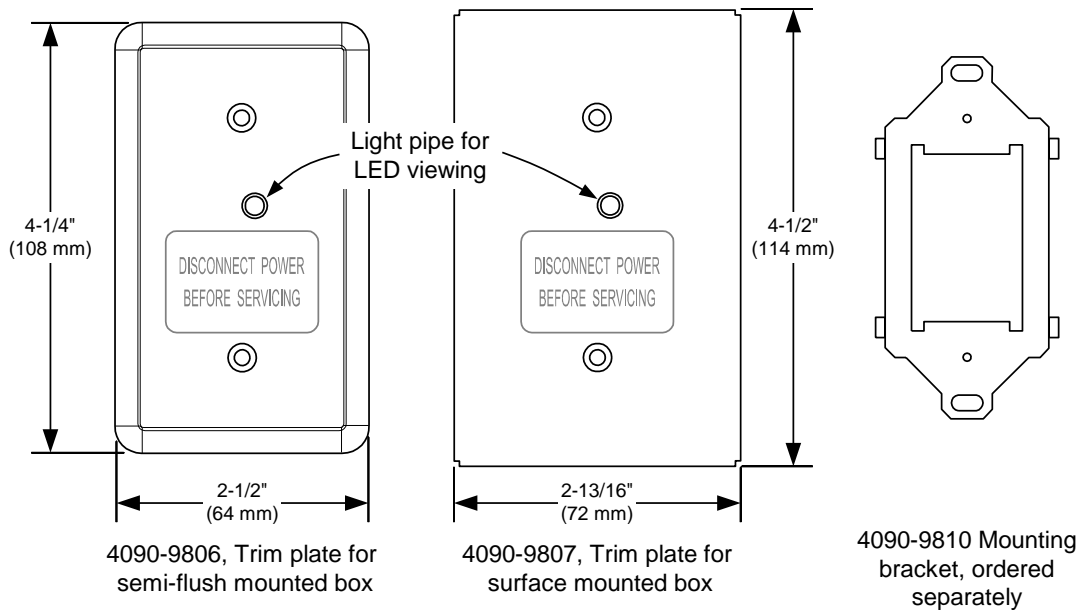

NOTE: These mounting plates require mounting bracket 4090-9810.

Optional Trim Plates and Mounting Bracket for Visible LED

4090-9051 Mounting Information

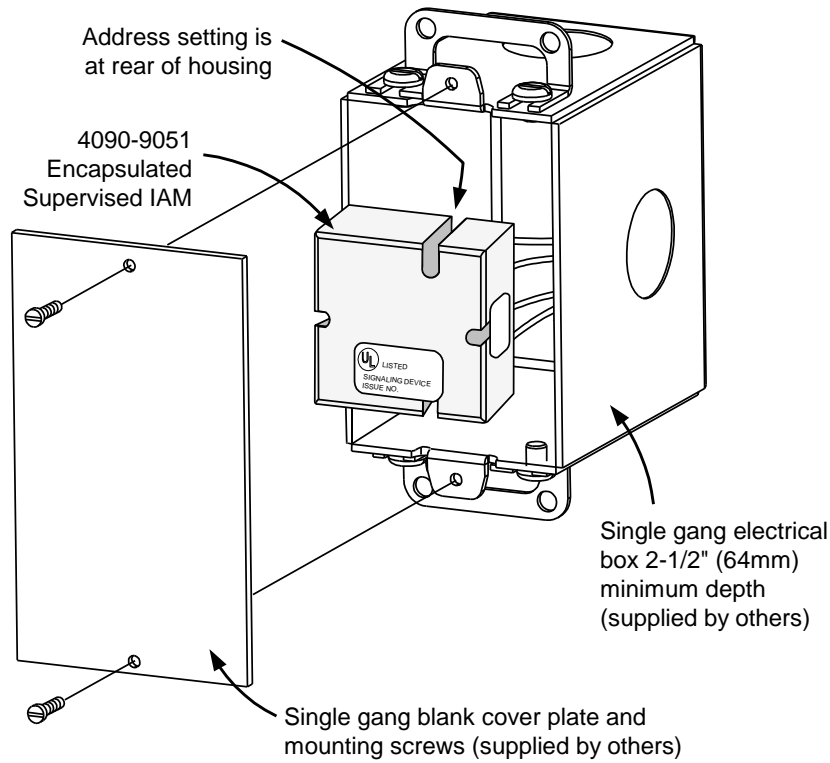

Tyco is a registered trademark of Tyco International Services GmbH and is used under license. Simplex, the Simplex logo, IDNet, and MAPNET II are trademarks of Tyco International Ltd. and its affiliates and are used under license.

INSERT 4

NOTIFICATION APPLIANCES & ACCESSORIES

Features

Visible only (V/O) 24 VDC notification appliances with high output xenon strobe, available for wall or ceiling mount:

- Intensity is selectable as 15, 30, 75, or 110 candela with visible selection jumper secured behind strobe housing
- Operation is compatible with ADA requirements (refer to important installation information on page 3)
- Polarized input allows connection to compatible reverse polarity, supervised notification appliance circuit (NAC)
- Regulated circuit design ensures consistent flash output and provides controlled inrush current
- Rugged, high impact, flame retardant thermoplastic housings are available in red or white with clear lens
- Listed to UL 1971 and ULC S526

Strobes provide synchronized flash for use with:

- 4006, 4008, 4010, and 4100U Series fire alarm control panels with NACs selected to provide strobe synchronization or SmartSync two-wire control**
- 4009 IDNet™ NAC Extenders
- Separate strobe Synchronization Modules that are available for Class B or Class A operation
- Separate SmartSync Control Modules (SCMs) that provide Class B or Class A output from conventional NAC inputs

Strobe housings provides flexible, easy, and convenient semi-flush or surface wall mounting:

- Rear of housing does not extend into box
- Wall mount strobes easily mount to single gang, double gang, or 4-inch square outlet box
- Ceiling mount strobes mount to single gang boxes

Wall mount strobe features:


- Wiring terminals are accessible from the front of the housing providing easy access for installation, inspection, and testing
- Covers are available separately to convert housing color

Optional adapters and wire guards:

- Wall mount strobe adapters are available to cover surface mounted electrical boxes and to adapt to Simplex® 2975-9145 boxes
- UL listed red wire guards are available for wall or ceiling mount strobes*



Wall Mount Strobes

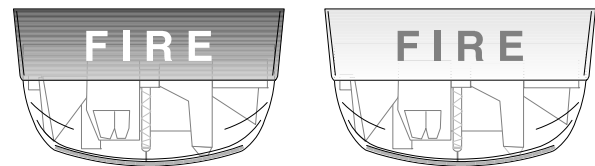

Ceiling Mount Strobes

Description

Multi-Candela TrueAlert synchronized strobes

provide convenient installation to standard electrical boxes. The enclosure designs are both impact and vandal resistant and provide a convenient strobe intensity selection. Since each model can be selected for intensity output, on-site model inventory is minimized and changes encountered during construction can be easily accommodated.

Wall mount strobe housings are a one-piece assembly (including lens) that mounts to a single or double gang, or 4" square standard electrical box. The cover can be quickly removed (a tool is required) and covers are available separately for color conversion.

Ceiling mount strobes install using standard single gang electrical boxes. Color choice is determined by model number.

Strobe Intensity Selection

During installation, a selection plug at the back of the housing determines the desired strobe intensity. An attached flag with black letters on a highly visible yellow background allows the selected intensity to be seen at the side of the strobe lens.

Strobe Application Reference

Proper selection of visible notification is dependent on occupancy, location, local codes, and proper applications of: the *National Fire Alarm Code* (NFPA 72), ANSI A117.1; the appropriate model building code: BOCA, ICBO, or SBCCI; and the application guidelines of the Americans with Disabilities Act (ADA).

** Simplex multi-candela SmartSync two-wire horn/strobe appliance operation is protected under one or more of the following U.S. Patent Numbers: 5,559,492; 5,622,427; 5,865,527; 5,886,620; 6,281,789; 6,954,137; 7,005,971; and 7,006,003.

* Refer to page 2 for guard listing. This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7125-0026:316 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. Refer to page 2 for listing status of wire guards. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Safety Products Westminster.

Synchronized Strobes

Multiple Strobes. When multiple strobes and their reflections can be seen from one location, synchronized flashes reduce the probability of photo-sensitive reactions as well as the annoyance and possible distraction of random flashing. These multi-candela strobes are synchronized over a two-wire circuit when connected to compatible NACs, to compatible Synchronized Flash Modules, or to SmartSync Control Modules.

SmartSync Two-Wire Control

Some applications desire the audible notification appliances to be capable of being silenced before the alarm condition is reset (on-until-silenced) while the visible notification appliances are kept activated until the alarm condition is reset (on-until-reset). SmartSync operation mode provides this function using a single circuit (two-wire operation).

SmartSync Control Sources

SmartSync two-wire control is available from:

- 4006, 4008, 4100U, and 4010 Fire Alarm Control Panels (refer to individual product data sheets for more information)
- 4009 IDNet NAC Extenders (refer to data sheet S4009-0002)
- SmartSync Control Module (SCM) Model 4905-9938 (refer to data sheet S4905-0003)

Additional SmartSync compatible notification appliances include separate horns and combination horn/strobe notification appliances.

Product Selection

Multi-Candela Visible Notification Appliances (Strobes)

Model	Mounting	Housing Color	"FIRE" Lettering	Description
4906-9101	Wall	Red	White	Multi-candela strobe with intensity selectable as: 15, 30, 75, or 110 candela; synchronized flash rate; SmartSync two-wire control compatible
4906-9103		White	Red	
4906-9102	Ceiling	Red	White	
4906-9104		White	Red	

Wall Mount Strobe Adapters

Model	Description	Dimensions
4905-9937	Red Surface Mount Adapter Skirt; use to cover 1-1/2" (38 mm) deep surface mounted boxes	5-3/8" H x 5-1/4" W x 1-5/8" D (136 mm x 133 mm x 41 mm)
4905-9940		Total depth with strobe = 4-3/8" (111 mm)
4905-9931	Red Adapter Plate for mounting to Simplex 2975-9145 box (typically for retrofit, may be mounted vertical or horizontal)	8-5/16" x 5-3/4" x 0.060" Thick (211 mm x 146 mm x 1.5 mm)
2975-9145	Red Mounting Box, requires Adapter Plate 4905-9931	7-7/8" x 5-1/8" x 2-3/4" D (200 mm x 130 mm x 70 mm)

Ceiling Mount Strobe Adapter

Model	Description	Dimensions
4905-9910	Surface Mount Adapter Plate; zinc plated; required for mounting to handy box; not needed when using 4905-9926 guard	4-7/8" x 3-1/8" x 0.060" D (124 mm x 79 mm x 1.5)

Synchronization Modules (refer to data sheet S4905-0003 for additional information)

Model	Description	Dimensions
4905-9914	Class B Synchronized Flash Module; epoxy encapsulated with in/out 18 AWG (0.82 mm ²) wire leads, rated for 2 A NAC, requires 5 mA for power	1-3/8" x 2-7/16" x 13/16" (35 mm x 62 mm x 20 mm)
4905-9922		
4905-9938	SmartSync Control Module with Class B or Class A output; mounts in 4" (102 mm) square box	4" x 4-1/8" x 1-1/4" D (102 mm x 105 mm x 32 mm)

Replacement Covers and Guards

Model	Description	Dimensions
4905-9992	Red cover with white "FIRE" lettering	For Wall mount strobes 5-1/8" H x 5" W x 1-1/2" D (130 mm x 127 mm x 38 mm)
4905-9993	White cover with red "FIRE" lettering	
4905-9961*	Wall mount	Red wire guard with mounting plate, compatible with semi-flush or surface mounted boxes 6-1/16" H x 6-1/16" W x 3-1/8" D (154 mm x 154 mm x 79 mm)
4905-9926*	Ceiling mount	

* UL listed by Space Age Electronics Inc.

Strobe Specifications

Wall Mount or Ceiling Mount, Common Specifications



Rated Voltage Range		Regulated 24 VDC; see Note 1 below			
Flash Rate		1 Hz			
Synchronized NAC Loading		Up to 35 synchronized strobes maximum per NAC			
Temperature Range		32° to 122° F (0° to 50° C)			
Humidity Range		10% to 93%, non-condensing at 100° F (38° C)			
Connections		Terminal blocks for 18 AWG to 12 AWG (0.82 mm ² to 3.31 mm ²); two wires per terminal for in/out wiring			
Wall Mount	Housing Dimensions (with lens)	5-1/8" H x 5" W x 2-3/4" D (130 mm x 127 mm x 70 mm)			
	Maximum RMS Current Rating per Strobe Setting (see Note 2 below)	15 cd	30 cd	75 cd	110 cd
		60 mA	94 mA	186 mA	252 mA
	Reference RMS Currents at other voltages	18 VDC	53 mA	84 mA	165 mA
24 VDC		40 mA	63 mA	124 mA	168 mA
Ceiling Mount	Housing Dimensions (with lens)	4-3/4" L x 2-5/16" W x 2-5/8" D (121 mm x 75 mm x 67 mm)			
	Maximum RMS Current Rating per Strobe Setting (see Note 2 below)	15 cd	30 cd	75 cd	110 cd
		75 mA	125 mA	233 mA	316 mA
	Reference RMS Currents at other voltages	18 VDC	67 mA	111 mA	207 mA
24 VDC		50 mA	83 mA	155 mA	211 mA

NOTES:


1. "Regulated 24 VDC" refers to the voltage range of 16 to 33 VDC per UL Standard 1971, *Signaling Devices for the Hearing Impaired*, changes effective May 1, 2004. This voltage range is the absolute operating range. Operation outside of this range may cause permanent damage to the strobe. Please note that 16 VDC is the lowest operating voltage that is allowed at the last appliance on the NAC under worst case conditions.
2. The maximum RMS current listed is the device nameplate rating. Strobe designs are constant wattage and the maximum RMS current rating occurs at the lowest allowable operating voltage. (RMS is root mean square and refers to the effective value of a varying current waveform.)

Installation Reference, Surface or Semi-Flush Wall Mounting


Mounting is compatible with single gang, double gang, and 4" (102 mm) square boxes, 1-1/2" (38 mm) deep, by others

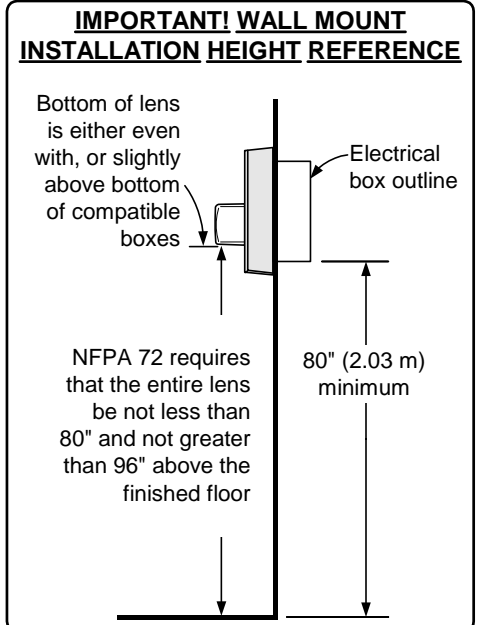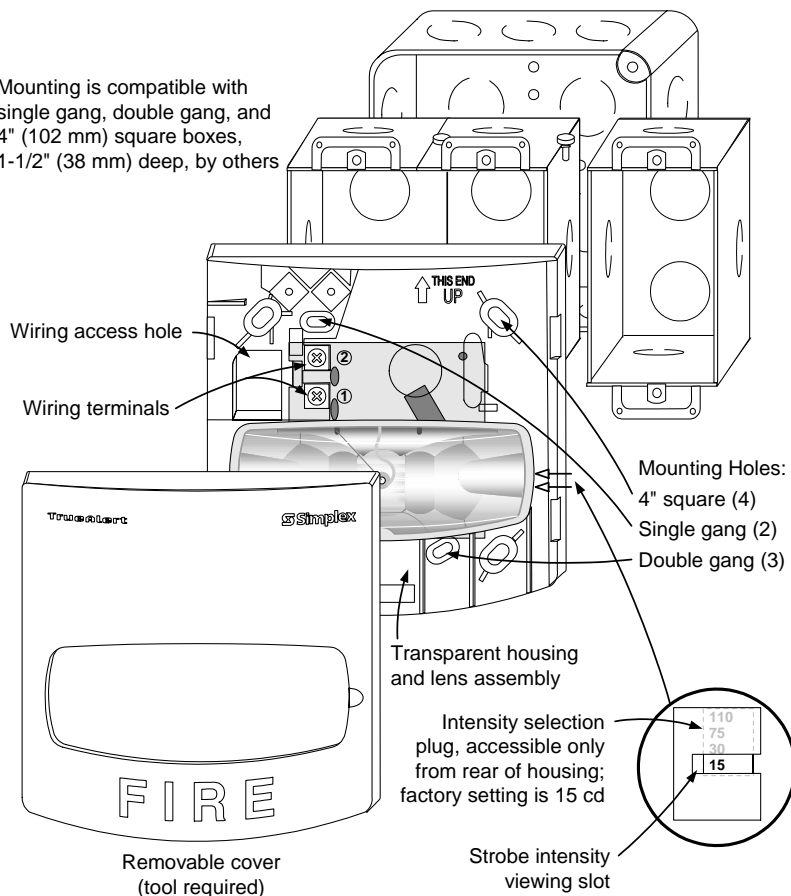

Ceiling Mount Strobe Installation Reference

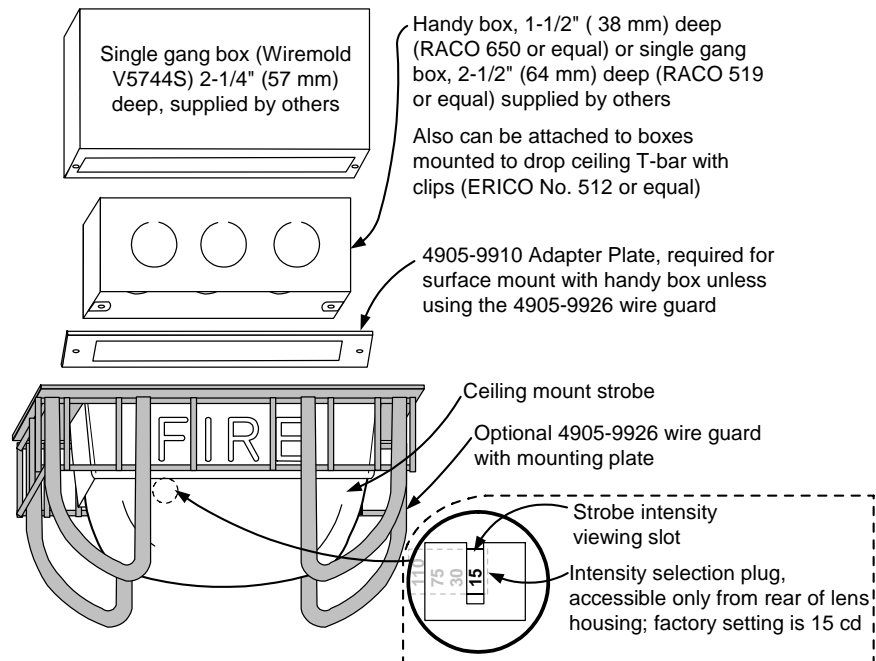

Wall Mount Installation Reference; Adapter Plate, Guard, and Adapter Skirt

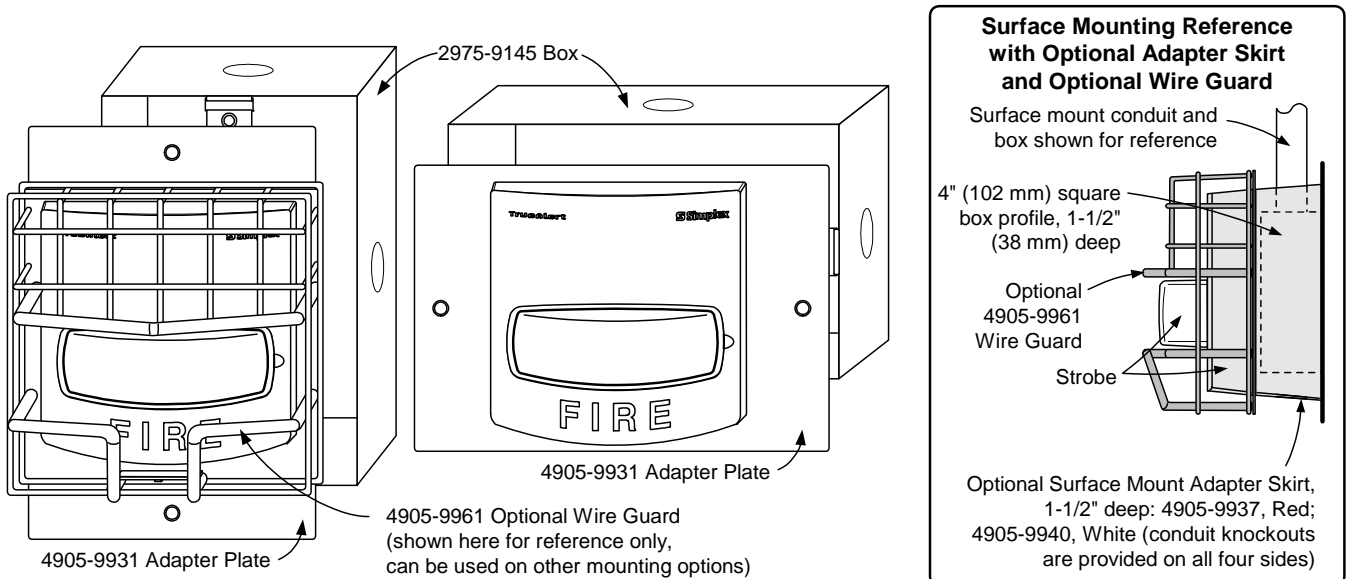

Tyco is a registered trademark of Tyco International Services GmbH and is used under license. Simplex, the Simplex logo, IDNet, TrueAlert, and SmartSync are trademarks of Tyco International Ltd. and its affiliates and are used under license. NFPA 72 and National Fire Alarm Code are registered trademarks of the National Fire Protection Association (NFPA).

Features**Audible/visible (A/V) notification appliances with efficient electronic horn and high output xenon strobe, available for wall or ceiling mount:**

- Operation is compatible with ADA requirements (refer to important installation information on page 3)
- Rugged, high impact, flame retardant thermoplastic housings are available in red or white with clear lens

Operates over a two-wire SmartSync circuit to provide:

- Horns that are controlled separately from strobes on the same two-wire circuit
- “On-until-silenced” and “on-until-reset” operation on the same two-wire pair
- SmartSync horn activation of Temporal pattern, March Time pattern (at 60 BPM), or on continuously
- Strobe appliances on the same circuit operating at a synchronized 1 Hz flash rate
- Operation requires connection to a compatible SmartSync operation NAC or to SmartSync Control Module (SCM) 4905-9938

Wall mount A/Vs features:

- Wiring terminals are accessible from the front of the housing providing easy access for installation, inspection, and testing
- Covers are available separately to convert housing color
- Optional UL/ULC listed sound damper for locations requiring attenuation of 5 to 6 dBA (stairwells, small rooms, highly reverberant areas, etc.)

Optional adapters and wire guards:


- Wall mount A/V adapters are available to cover surface mounted electrical boxes and to adapt to Simplex® 2975-9145 boxes
- UL listed red wire guards are available for wall or ceiling mount A/Vs*

Visible notification appliance (strobe):

- 24 VDC xenon strobe; intensity is selectable as 15, 30, 75, or 110 candela with visible selection jumper secured behind strobe housing
- Regulated circuit design ensures consistent flash output and provides controlled inrush current
- Listed to UL 1971 and ULC S526

Audible notification appliance (horn):

- Low current, 24 VDC electronic horn with harmonically rich sound output suitable for either steady or coded operation (Temporal or 60 BPM March Time pattern)
- Listed to UL 464 and ULC S525

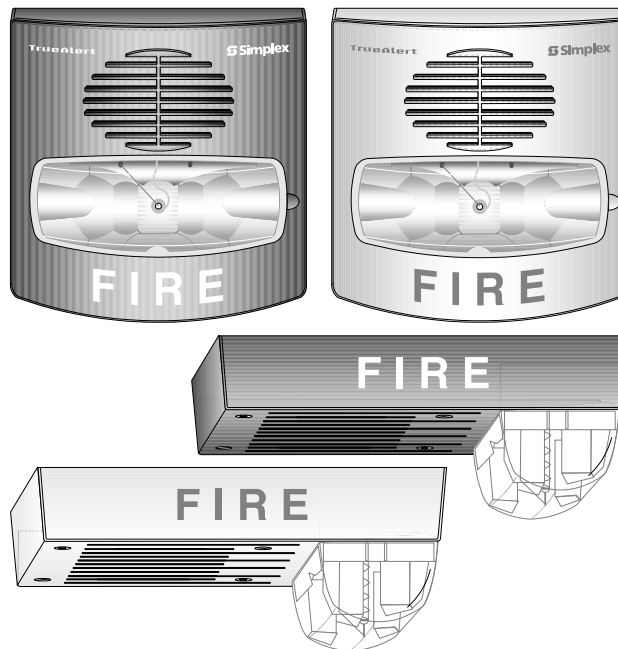

Wall and Ceiling Mount A/Vs

Description

Multi-Candela TrueAlert A/Vs with horn and synchronized strobe provide convenient installation to standard electrical boxes. The enclosure designs are both impact and vandal resistant and provide a convenient strobe intensity selection. Since each model can be selected for strobe intensity output, on-site model inventory is minimized and changes encountered during construction can be easily accommodated.

Wall mount A/V housings are a one-piece assembly (including lens) that mounts to a single or double gang, or 4” square standard electrical box. The cover can be quickly removed (a tool is required) and covers are available separately for color conversion.

Ceiling mount A/Vs install using standard 4” electrical boxes. Color choice is determined by model number.

Strobe Intensity Selection

During installation, a selection plug at the back of the housing determines the desired strobe intensity. An attached flag with black letters on a highly visible yellow background allows the selected intensity to be seen at the side of the strobe lens.

* Refer to page 2 for guard listing. This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7125-0026:317 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. Accepted for use – City of New York Department of Buildings – MEA35-93E. Refer to page 2 for listing status of wire guards. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Safety Products Westminster.

** Simplex multi-candela SmartSync two-wire horn/strobe appliance operation is protected under one or more of the following U.S. Patent Numbers: 5,559,492; 5,622,427; 5,865,527; 5,886,620; 6,281,789; 6,954,137; 7,005,971; and 7,006,003.

Strobe Application Selection

Proper selection of visible notification is dependent on occupancy, location, local codes, and proper applications of: the *National Fire Alarm Code* (NFPA 72), ANSI A117.1; the appropriate model building code: BOCA, ICBO, or SBCCI; and the application guidelines of the Americans with Disabilities Act (ADA).

Synchronized Strobes

Multiple Strobes. When multiple strobes and their reflections can be seen from one location, synchronized flashes reduce the probability of photo-sensitive reactions as well as the annoyance and possible distraction of random flashing. The multi-candela strobes of these A/Vs are synchronized by the controlling SmartSync operation NAC.

Product Selection

Multi-Candela A/Vs

Model	Mounting	Housing Color	"FIRE" Lettering	Description
4906-9127	Wall	Red	White	Horn with Multi-Candela Strobe; strobe intensity selectable as: 15, 30, 75, or 110 candela; operates with SmartSync two-wire control
4906-9129		White	Red	
4906-9128	Ceiling	Red	White	
4906-9130		White	Red	

Wall Mount A/V Accessories

Model	Description	Dimensions
4905-9937	Red Surface Mount Adapter Skirt; use to cover 1-1/2" (38 mm) deep surface mounted boxes	5-3/8" H x 5-1/4" W x 1-5/8" D (136 mm x 133 mm x 41 mm)
4905-9940	White Surface Mount Adapter Skirt; use to cover 1-1/2" (38 mm) deep surface mounted boxes	depth with strobe = 4-3/8" (111 mm)
4905-9931	Red Adapter Plate for mounting to Simplex 2975-9145 box (typically for retrofit, may be mounted vertical or horizontal)	8-5/16" x 5-3/4" x 0.060" Thick (211 mm x 146 mm x 1.5 mm)
2975-9145	Red Mounting Box, requires Adapter Plate 4905-9931	7-7/8" x 5-1/8" x 2-3/4" D (200 mm x 130 mm x 70 mm)
4905-9838	Optional Sound Damper; package of 20; field installed adhesive backed horn output attenuator; reduces output 5 to 6 dBA NOTE: After Sound Damper installation, measure sound level to ensure compliance with applicable code requirements	1-3/4" Diameter (44.5 mm) with 0.31" (8 mm) sound opening

SmartSync Control Module

Model	Description	Dimensions
4905-9938	SmartSync Control Module with Class B or Class A output; mounts in 4" (102 mm) square box; refer to data sheet S4905-0003 for details	4" x 4-1/8" x 1-1/4" D (102 mm x 105 mm x 32 mm)

Replacement Covers for Wall Mount A/Vs

Model	Description	Dimensions
4905-9994	Red cover with white "FIRE" lettering	5-1/8" H x 5" W x 1-1/2" D (130 mm x 127 mm x 38 mm)
4905-9995	White cover with red "FIRE" lettering	

Wire Guards and Ceiling Mount A/V Adapter

Model	Description	Dimensions
4905-9961*	Wall mount red wire guard with mounting plate, compatible with semi-flush or surface mounted boxes	6-1/16" H x 6-1/16" W x 3-1/8" D (154 mm x 154 mm x 79 mm)
4905-9927*	Red Wire Guard for mounting to flush mounted electrical box	8-1/2" x 6-1/8" x 3" (216 mm x 156 mm x 76 mm)
4905-9928*	Ceiling Mount Red Adapter Plate, required to mount guard to surface mounted electrical box	9" x 7" (229 mm x 178 mm)
4905-9915	Surface Mount Adapter Box Extension, use to cover 1-1/2" deep surface mounted boxes	4-3/4" x 6-7/8" x 1-1/2" deep, (121 mm x 175 mm x 38 mm)
4905-9916		

* UL listed by Space Age Electronics Inc.

SmartSync Two-Wire Control

SmartSync operation mode allows a two-wire circuit to provide the ability to activate both the horn and strobe on the same NAC and then allow the horn to be silenced while the strobe remains flashing. The horn operates as "on-until-silenced" while the strobe operation is "on-until-reset."

SmartSync Control Sources

- 4006, 4008, 4100U, and 4010 Fire Alarm Control Panels (refer to individual product data sheets for more information)
- 4009 IDNet NAC Extender (refer to data sheet S4009-0002)
- SmartSync Control Module (SCM) 4905-9938 (refer to data sheet S4905-0003)

Additional SmartSync compatible notification appliances include separate horns and combination horn/strobe notification appliances.

A/V Specifications



Wall Mount or Ceiling Mount, Common Specifications

Rated Voltage Range		Regulated 24 DC; see Note 1 below			
Flash Rate and Synchronized NAC Loading		1 Hz; with up to 35 synchronized strobes maximum per NAC			
Environmental; Temperature and Humidity		32° to 122° F (0° to 50° C); 10% to 93%, non-condensing at 100° F (38° C)			
Connections		Terminal blocks for 18 AWG to 12 AWG (0.82 mm ² to 3.31 mm ²); two wires per terminal for in/out wiring			
Horn Output Characteristics		2400 to 3700 Hz sweep, modulated at 120 Hz rate			
Horn Output Ratings (see Note 2 for polar dispersion reference)	Model Type	Wall Mount		Ceiling Mount	
	Sound Type (see Note 2)	Steady	Coded	Steady	Coded
	Reverberant Chamber Test, per UL 464 @ 10 ft (~3 m)	86 dBA	82 dBA	87 dBA	83 dBA
	Anechoic Chamber Test, per ULC S525 @ 3 m (~10 ft)	88 dBA	94 dBA	90 dBA	98 dBA
Wall Mount	Housing Dimensions (with lens)	5-1/8" H x 5" W x 2-3/4" D (130 mm x 127 mm x 70 mm)			
	Maximum RMS Current Rating per Strobe Setting (see Note 3 below)	15 cd	30 cd	75 cd	110 cd
		75 mA	116 mA	221 mA	285 mA
	Reference RMS Currents at other voltages	18 VDC	67 mA	103 mA	196 mA
24 VDC		50 mA	77 mA	147 mA	190 mA
Ceiling Mount	Housing Dimensions (with lens)	4-3/4 L" x 6-7/8" W x 2-5/8" D (121 mm x 175 mm x 67 mm)			
	Maximum RMS Current Rating per Strobe Setting (see Note 3 below)	15 cd	30 cd	75 cd	110 cd
		86 mA	132 mA	250 mA	320 mA
	Reference RMS Currents at other voltages	18 VDC	76 mA	117 mA	222 mA
24 VDC		57 mA	88 mA	167 mA	213 mA


NOTES:

- "Regulated 24 DC" refers to the voltage range of 16 to 33 VDC per UL Standard 1971, *Signaling Devices for the Hearing Impaired*, changes effective May 1, 2004. This voltage range is the absolute operating range. Operation outside of this range may cause permanent damage to the appliance. Please note that 16 VDC is the lowest operating voltage that is allowed at the last appliance on the NAC under worst case conditions.
- Coded values are typical of the output measured with a Temporal coded or a March Time coded pulse and with a sound level meter reading on a "fast" setting. Polar dispersion per ULC S525 testing = -3 dBA at +/-40° off-axis; -6 dBA at +/- 50° off-axis.
- Currents are with horn on steady. The maximum RMS current listed is the device nameplate rating. Strobe designs are constant wattage and the maximum RMS current rating occurs at the lowest allowable operating voltage. (RMS is root mean square and refers to the effective value of a varying current waveform.)


Installation Reference, Surface or Semi-Flush Mounting

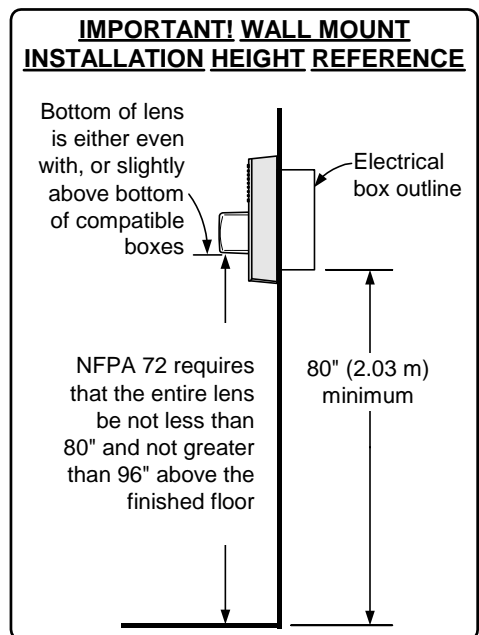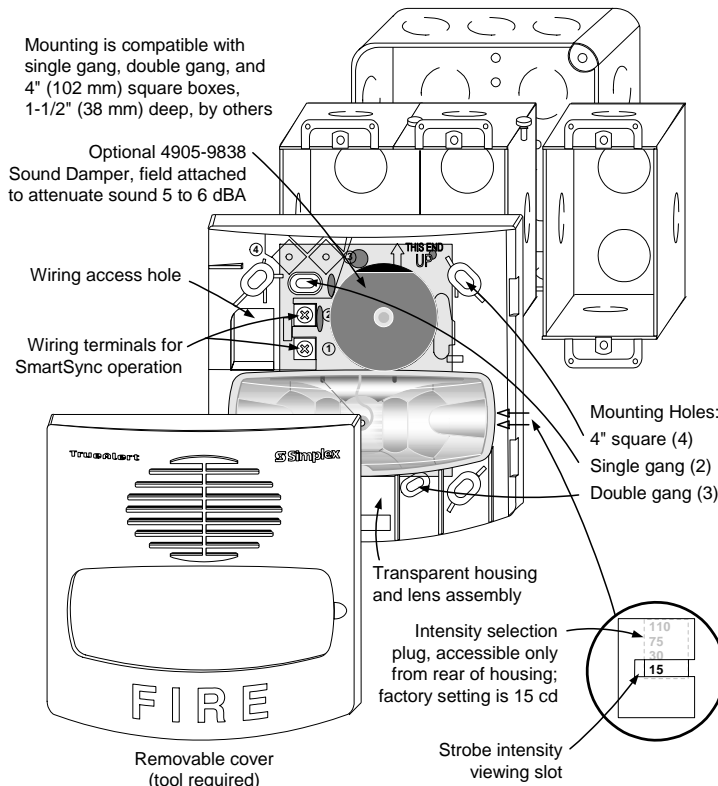

Ceiling Mount A/V and Guard Installation Reference

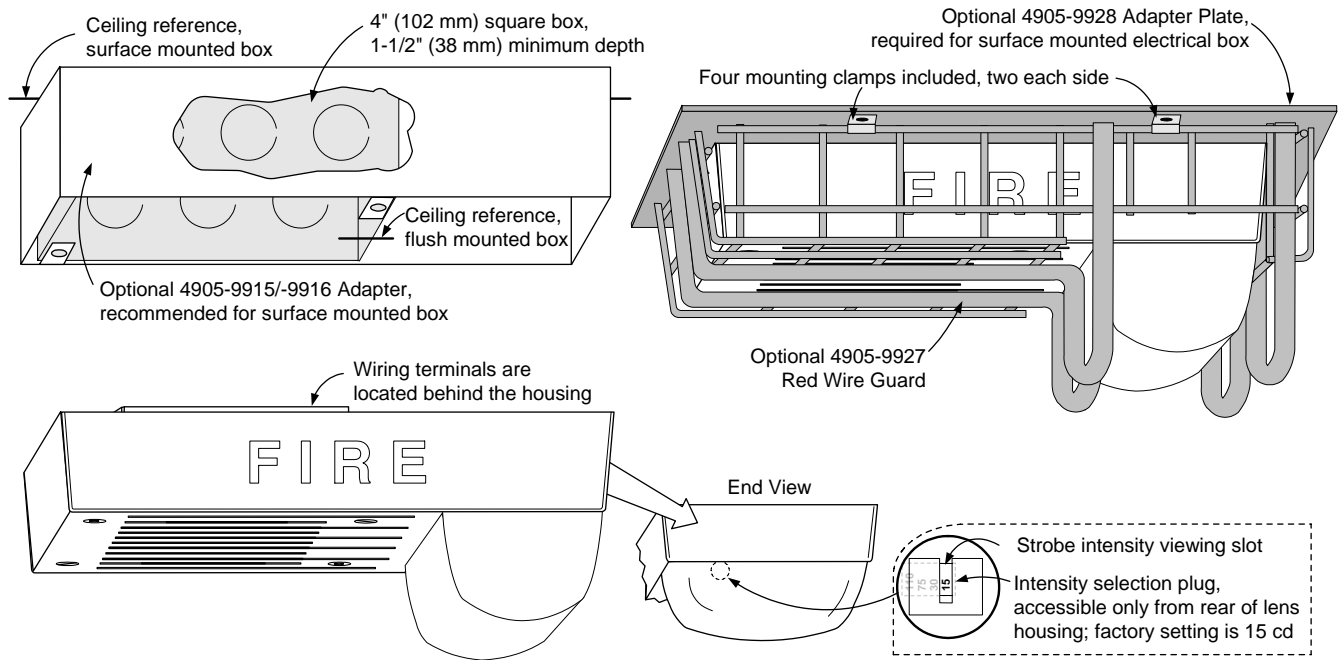

Wall Mount Installation Reference; Adapter Plate, Guard, and Adapter Skirt

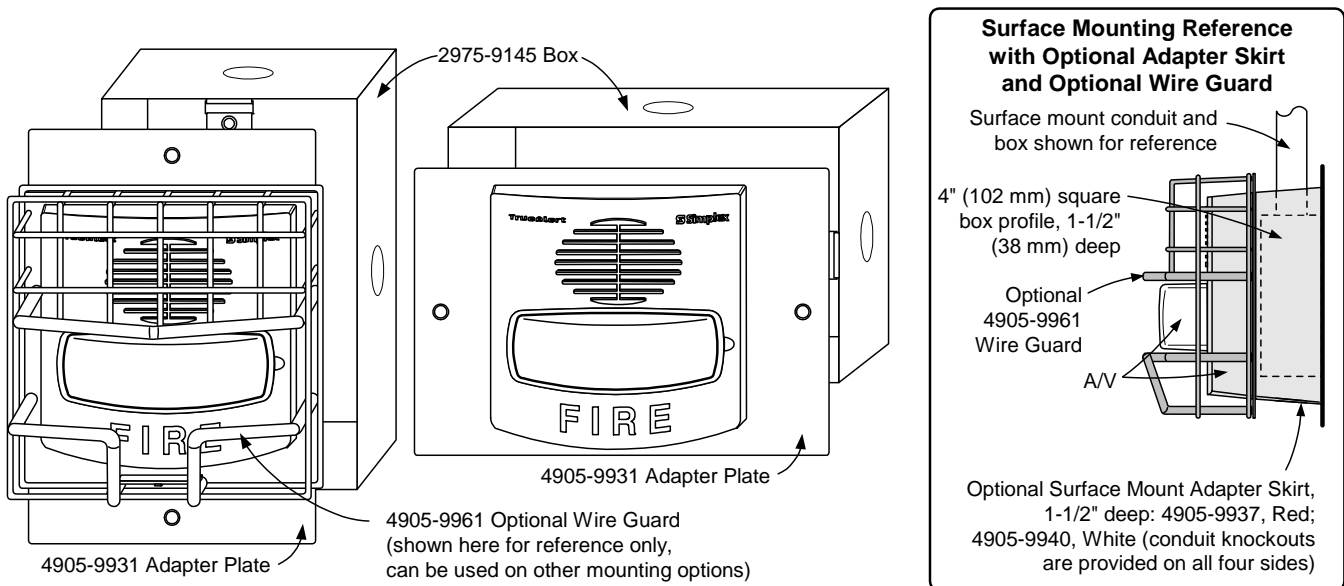

Tyco is a registered trademark of Tyco International Services GmbH and is used under license. Simplex, the Simplex logo, IDNet, TrueAlert, and SmartSync are trademarks of Tyco International Ltd. and its affiliates and are used under license. NFPA 72 and National Fire Alarm Code are trademarks of the National Fire Protection Association (NFPA).

Features**Weatherproof 24 VDC notification appliances for extended temperature and extended humidity operation:**

- NEMA 3R rated enclosure with ratings for indoor or outdoor applications
- Rugged, high impact, flame retardant thermoplastic housings are available in red or white with clear lens
- Red housings are for indoor or outdoor applications and provide UV light stable color
- White housings are for indoor applications with limited UV light exposure
- Mounting is to matching weatherproof boxes (required), ordered separately
- Wiring terminals are accessible from the front of the housing providing easy access for installation, inspection, and testing

Agency listings reference:

- UL listed to Standard 1638 for outdoor applications with strobe rated at 75 cd (WP75)
- UL listed to Standard 1971 for indoor applications with strobe intensity selectable as 15, 60, or 75 candela; indoor applications are compatible with ADA requirements (refer to important installation information on page 4)
- Separate models are ULC listed to Standard S526 (strobes) and S525 (horns) for outdoor applications with strobe intensity selectable as 5, 20, or 30 candela (available in red only)

Operation details:

- A visible intensity selection jumper is secured behind the strobe housing
- Polarized input allows connection to compatible reverse polarity, supervised notification appliance circuit (NAC)
- Regulated circuit design ensures consistent flash output and provides controlled inrush current
- A/V appliances have an efficient electronic horn

Synchronized strobe compatibility:

- Simplex® fire alarm control panels and NAC Extenders when selected to provide strobe synchronization or SmartSync two-wire control
- Separate strobe Synchronization Modules or SmartSync Control Modules (SCMs) that convert conventional NAC inputs to a SmartSync output

SmartSync two-wire operation provides:

- Horns controlled separately from strobes on the same two-wire circuit, activated as Temporal pattern, March Time pattern (at 60 BPM), or on continuously



Weatherproof A/V (top) and Strobe (middle), side view of A/V on Weatherproof Mounting Boxes (bottom)

Description

Weatherproof multi-candela TrueAlert appliances provide V/O and A/V SmartSync operation for indoor and outdoor, extended temperature and extended humidity applications. The enclosures are impact and vandal resistant and provide a convenient strobe intensity selection. Since each model can be selected for intensity output, on-site model inventory is minimized and changes encountered during construction can be easily accommodated.

Strobe Intensity Selection

During installation, a selection plug at the back of the housing determines the desired strobe intensity. An attached flag with black letters on a yellow background allows the selected intensity to be seen at the side of the strobe lens.

* This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7125-0026:331 for allowable values and/or conditions concerning material presented in this document. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Safety Products Westminster.

Strobe Application Reference

Proper selection of weatherproof notification is dependent on occupancy, location, local codes, and proper applications of: the *National Fire Alarm and Signaling Code* (NFPA 72), ANSI A117.1; the appropriate model building code: BOCA, ICBO, or SBCCI; and the application guidelines of the Americans with Disabilities Act (ADA). Requirements may differ from indoor appliance applications, contact your local authority having jurisdiction (AHJ) to assist in determining requirements.

SmartSync Two-Wire Control

SmartSync operation mode allows a two-wire circuit to provide the ability to activate both the horn and strobe on the same NAC and then allow the horn to be silenced while the strobe remains flashing. The horn operates as “on-until-silenced” while the strobe operation is “on-until-reset.”

SmartSync Control Sources

SmartSync two-wire control is available from:

- 4006, 4008, 4100ES, 4010ES, 4100U, and 4010 Fire Alarm Control Panels (refer to individual product data sheets for more information)
- 4009 IDNet NAC Extenders (refer to data sheet S4009-0002)
- SmartSync Control Module (SCM) Model 4905-9938 (refer to data sheet S4905-0003)
- Additional SmartSync compatible notification appliances include separate horns and combination horn/strobe notification appliances.

Product Selection

UL Listed TrueAlert Weatherproof Multi-Candela Notification Appliances

Model	Type	Housing	“FIRE” Lettering	Description	UL 1971 Intensity Rating	UL 1638 Intensity Rating
4906-9105	Strobe (V/O)	Red	White	UL listed weatherproof appliance with multi-candela strobe; requires weatherproof box below	15, 60, or 75 cd	75 cd (setting WP75)
4906-9106		White	Red			
4906-9131	Horn/Strobe (A/V)	Red	White			
4906-9132		White	Red			

ULC Listed TrueAlert Weatherproof Multi-Candela Notification Appliances

Model	Type	Housing	“FIRE” Lettering	Description	ULC Intensity Ratings
4906-9113	Strobe (V/O)	Red	White	ULC listed weatherproof appliance with multi-candela strobe; requires weatherproof box below	5, 20, or 30 cd
4906-9143	Horn/Strobe (A/V)				

Wall Mount Weatherproof Boxes (Required)

Model	Description	Dimensions
49WPBB-AVVOWR	Red	5 1/2" H x 6 1/8" W x 1 5/8" D (140 mm x 156 mm x 41 mm)
4905-9829	White	

Aftermarket Red Bilingual (French/English) Covers (for field installation)

Model	Description	
4905-9832	Red strobe (V/O) cover	White “FEU/FIRE” lettering
4905-9833	Red horn/strobe (A/V) cover	

Synchronization Module Reference (refer to data sheet S4905-0003 for additional information)

Model	Description	Dimensions
4905-9914	Class B	1 3/8" x 2 7/16" x 1 1/16" (35 mm x 62 mm x 20 mm)
4905-9922	Class A	
4905-9938	SmartSync Control Module with Class B or Class A output; mounts in 4" (102 mm) square box	4" x 4 1/8" x 1 1/4" D (102 mm x 105 mm x 32 mm)

Specifications

Rated Voltage Range	Regulated 24 VDC; see Note 1 below	
Flash Rate	1 Hz; Up to 24 synchronized strobes maximum per NAC	
Temperature Range	UL 1971 Listed Rating	32° to 122° F (0° to 50° C); selectable 15/30/75 cd
	UL 1638 Listed Rating	-31°F to 150°F (-35° C to 66°C); 75 cd rating
	ULC S526 & S525 Listed Rating	-40°F to 150°F (-40° C to 66°C); 5/20/30 cd rating
Humidity Range	UL 1971 Listed Rating	10% to 93%, at 100° F (38° C)
	UL 1638, ULC S526, & ULC S525	up to 98%, at 104° F (40° C)
Wiring Connections	Terminal blocks for 18 AWG to 12 AWG (0.82 mm ² to 3.31 mm ²); two wires per terminal for in/out wiring	

Horn Output; Models 4906-9131, 4906-9132, & 4906-9143; UL & ULC Ratings as noted

Output Sound Characteristics	2400 to 3700 Hz sweep, modulated at 120 Hz rate						
Horn Output Ratings @ 10 ft (3 m) (see Note 2)	Voltage	16 VDC		24 VDC		33 VDC	
	Sound Type (see Note 2)	Steady	Coded	Steady	Coded	Steady	Coded
	UL 464 Reverberant Chamber	80 dBA	76 dBA	83 dBA	79 dBA	86 dBA	81 dBA
	ULC S525 Anechoic Chamber	96 dBA	96 dBA	99 dBA	99 dBA	101 dBA	101 dBA

Maximum RMS Current Ratings (see Note 3 below)


Model	Intensity Selection/Temperature	UL 1971 Ratings (32° F to 122° F)			UL 1638 Ratings 75 cd (WP75)	
		15 cd	60 cd	75 cd	32° F to 150°F (0° C to 66°C)	-31° F to below 32°F (-35° C to 0° C)
V/O Models 4906-9105 & 4906-9106		77 mA	192 mA	231 mA	189 mA	273 mA
A/V Models 4906-9131 & 4906-9132		91 mA	204 mA	249 mA	205 mA	277 mA

Model	ULC S526/S525 Ratings per Intensity Selection		
	5 cd	20 cd	30 cd
V/O Model 4906-9113	115 mA	270 mA	295 mA
A/V Model 4906-9143	125 mA	275 mA	322 mA

NOTES:



1. "Regulated 24 VDC" refers to the voltage range of 16 to 33 VDC per UL 1971 and UL 1638. This voltage range is the absolute operating range. Operation outside of this range may cause permanent damage to the strobe. Please note that 16 VDC is the lowest operating voltage that is allowed at the last appliance on the NAC under worst case conditions.
2. Coded values are typical of the output measured with a Temporal coded or a March Time coded pulse and with a sound level meter reading on a "fast" setting. Under the same test conditions, coded horn output "peak" sound level readings are typically 4 dBA higher. Anechoic horn output ratings are typically more representative of actual installed sound output
3. Currents of A/Vs are with horn on steady. The maximum RMS current listed is the device nameplate rating. Strobe designs are constant wattage and the maximum RMS current rating occurs at the lowest allowable operating voltage. (RMS is root mean square and refers to the effective value of a varying current waveform.)

Dimension and Optional Cover Reference

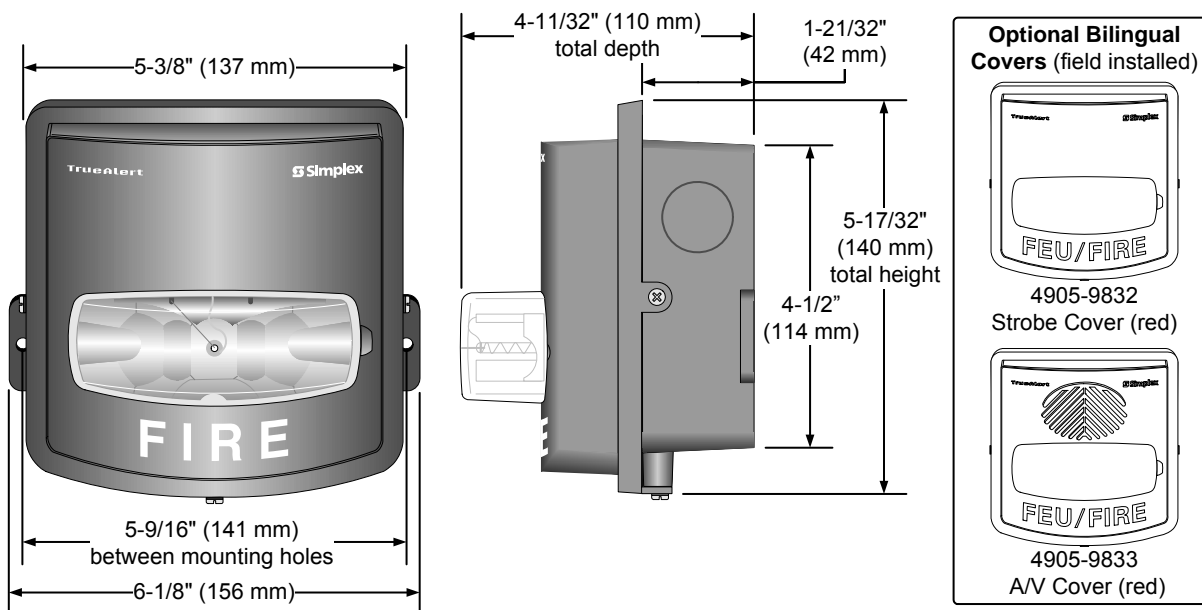


Weatherproof Appliance Installation Reference

NOTE: For detailed installation information, refer to Installation Instructions 579-857 for UL listed products, and Installation Instructions 579-885 for ULC listed products.

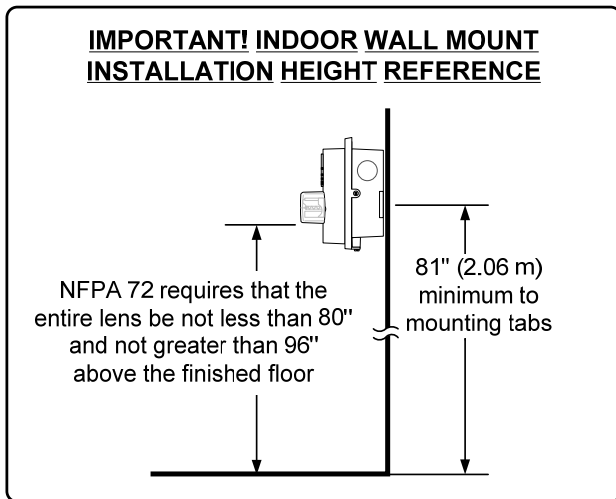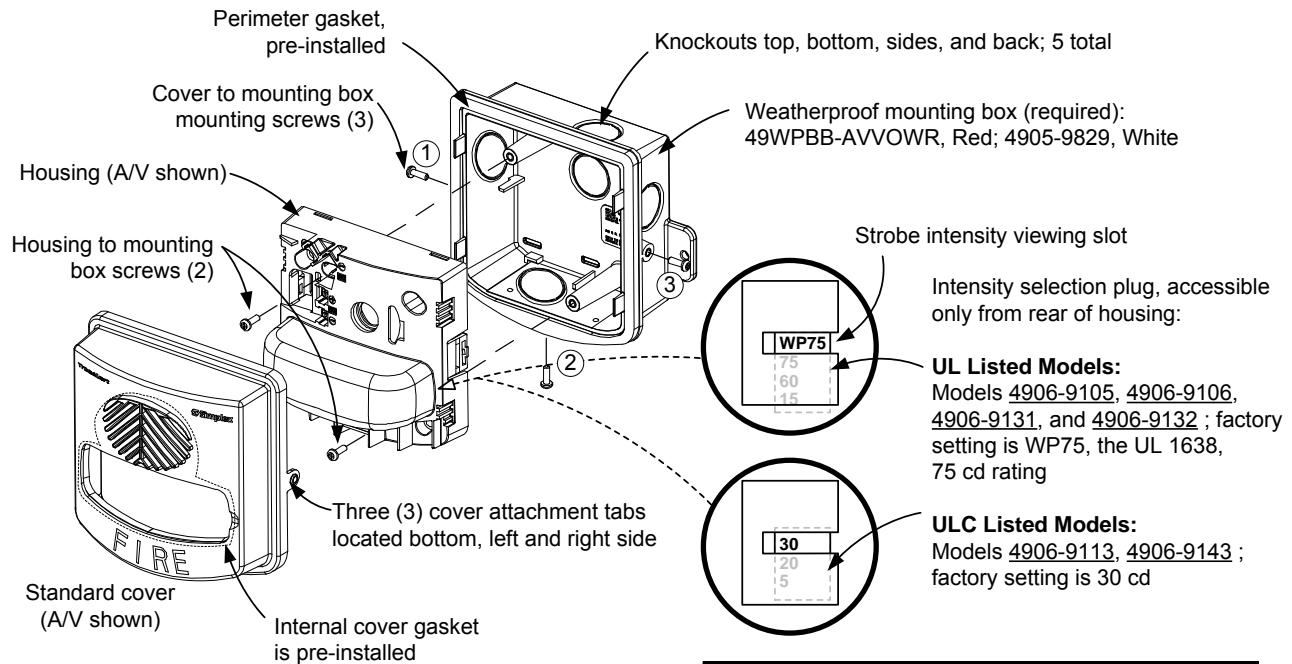

Polar Light Dispersion Reference, Each Intensity Selection; Percent of Rated Light Output at 77° F (25° C)

Angle Below Axis	Vertical Dispersion		Horizontal Dispersion		
	UL 1971 Minimum	Typical Output	Angle from Axis	UL 1971 Minimum	Typical Output
0	100%	322%	0	100%	320%
5	90%	217%	±5	90%	214%
10	90%	168%	±10	90%	177%
15	90%	179%	±15	90%	175%
20	90%	210%	±20	90%	174%
25	90%	184%	±25	90%	170%
30	90%	149%	±30	75%	169%
35	65%	172%	±35	75%	157%
40	46%	189%	±40	75%	151%
45	34%	203%	±45	75%	138%
50	27%	152%	±50	55%	130%
55	22%	166%	±55	45%	121%
60	18%	166%	±60	40%	117%
65	16%	164%	±65	35%	109%
70	15%	163%	±70	35%	105%
75	13%	159%	±75	30%	98%
80	12%	138%	±80	30%	90%
85	12%	113%	±85	25%	78%
90	12%	88%	±90	25%	67%

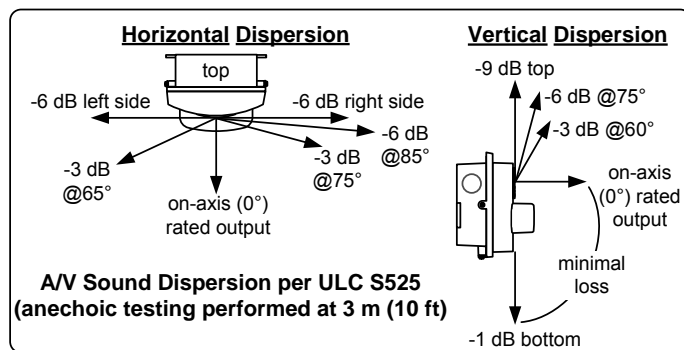

WP75 Intensity Selection Light Output Reference

Angle	On-Axis 0°	Vertical, Below Axis		Horizontal, Left/Right of Axis	
		45°	90°	45°	90°
UL 1638 Minimum Candela Rating (over temperature range)	75	35	10	32	15
Typical Candela at 77° F (25° C)	215	103	24	94	39

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. NFPA 72 and National Fire Alarm and Signaling Code are registered trademarks of the National Fire Protection Association (NFPA).

