


Two Pipe System


Two pipe system (room air independent) horizontally vented

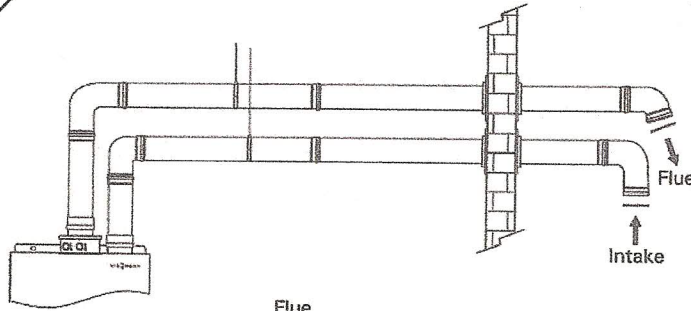

Vent system diameter (in)	2*	3	4
Maximum equivalent length ft. (m)	86 (20)	164 (50)	200 (61)

*stainless steel is not available in 2"
 Combustion air: CPVC, PVC, ABS and stainless steel (field supplied)
 Flue gas: CPVC and stainless steel (field supplied)
 PP(s): (Viessmann supplied)


Two pipe system (room air independent) vertically vented

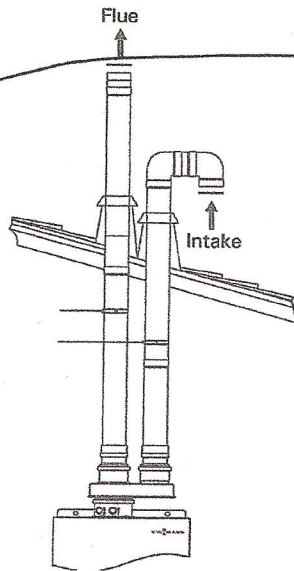

Vent system diameter (in)	2*	3	4
Maximum equivalent length ft. (m)	86 (20)	164 (50)	200 (61)

*stainless steel is not available in 2"
 Combustion air: CPVC, PVC, ABS and stainless steel (field supplied)
 Flue gas: CPVC and stainless steel (field supplied)
 PP(s): (Viessmann supplied)

Two pipe system (room air independent) hybrid

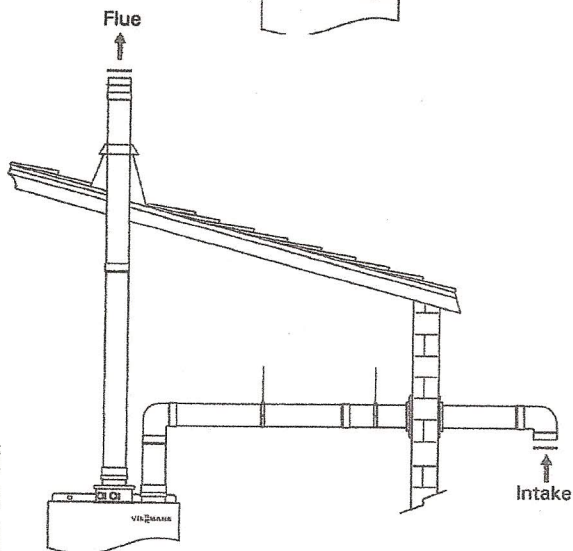

Vent system diameter (in)	2*	3	4
Maximum equivalent length ft. (m)	86 (20)	164 (50)	200 (61)

*stainless steel is not available in 2"
 Combustion air: CPVC, PVC, ABS and stainless steel (field supplied)
 Flue gas: CPVC and stainless steel (field supplied)
 PP(s): (Viessmann supplied)

5601 189 v1.1