

### ROOF FRAMING PLAN




SCALE 1/4"=1'-0"

**NOTES:**

1. SEE GENERAL NOTES FOR ADDITIONAL INFORMATION.
2. ALL WOOD COLUMNS IN 2x6 WALLS SHALL BE 3-2x6 AND IN 2x4 WALLS SHALL BE 3-2x4 UNLESS NOTED OTHERWISE ON PLANS.
3. ALL HEADERS IN 2x6 BEARING WALLS ARE (3) 2x6, UNO.
4. ALL HEADERS IN 2x4 BEARING WALLS ARE (2) 2x8, UNO.
5. ALL ROOF SHEATHING TO BE 5/8", SEE GENERAL NOTES FOR MORE INFO -TYP.
6. TRUSS MANUFACTURER TO CARRY ADDITIONAL TOP CHORD DEAD LOAD OF 7.5 PSF FOR FUTURE SOLAR -TYP

FRAMING PLAN SYMBOLS KEY	
□	WOOD POST
○	STEEL COLUMN
(X)	NUMBER OF WOOD STUDS IN POST BELOW
A	COLUMN ABOVE THIS LEVEL
B	COLUMN BELOW THIS LEVEL
C	COLUMN CONTINUOUS THROUGH THIS LEVEL
←	JOIST BEARING
→	CONTINUOUS JOIST WITH INTERMEDIATE BEARING
↑	FLUSH FRAMED JOIST BEARING WITH HANGER
⊥	WOOD STUD BEARING WALL BELOW
▬	SHEAR WALL
"X"J	NUMBER OF TRIM STUDS UNDER HEADER
"X"K	NUMBER OF KING STUDS ADJACENT TO HEADER

BEAM LEGEND	
---	DROPPED BEAM
---	FLUSH BEAM

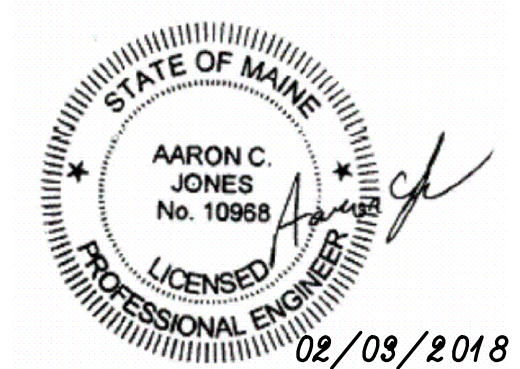

**Structural Integrity**  
Consulting Engineers, Inc.  
46 Forest Ave  
Portland, ME, 04101  
p. 207-744-6644  
f. 866-793-7835  
www.structuralintegrity.com

BUILD WITH CONFIDENCE  
© 2013 Structural Integrity Consulting Engineers, Inc.  
SI # 17-0127

REVISIONS	1	2	3	4	5