


SITE PLAN
SCALE: 1"=20'-0"

- CONSTRUCTION NOTES:**
- SEE STRUCTURAL DRAWINGS FOR DUCTWORK SUPPORT DETAILS, TANK COVER DETAILS AND CHANNEL COVER PLATE DETAILS.
 - SEE DRAWING SHEET M-8 FOR MECHANICAL LEGEND.
 - SEE ARCHITECTURAL DRAWINGS FOR DETAILS OF DUCT AND FAN ROOF SUPPORTS, AND WALL PENETRATION DETAILS.
 - DUCT SUPPORT LOCATIONS ARE APPROXIMATE, FINAL LOCATIONS WILL BE IN ACCORDANCE WITH THE DUCT MANUFACTURERS RECOMMENDATIONS.
 - VOLUME DAMPERS WILL BE POSITIVE SEAL FULL BLAST GATES UNLESS INDICATED OTHERWISE.
 - SEE DRAWING SHEET M-4 FOR DETAIL OF EXTERIOR PIPE INSULATION.
 - SEE DRAWING SHEET C-4 FOR YARD PIPING PLAN.
 - SEE DRAWING SHEET M-4 FOR DUCT SLEEVE DETAIL.
 - VOLUME DAMPERS IN VERTICAL ARE NOT SHOWN, REFER TO DRAWING SHEET M-1 FOR LOCATIONS OF VOLUME DAMPERS.
 - PROVIDE ALL LINK SEALS WITH STAINLESS STEEL HARDWARE.
 - PROVIDE 10" GOOSENECK SIMILAR TO DETAIL "C" ON SHEET M-4, THE NOZZLE IS PROVIDED ON DECK PLATE, LOCATION IS APPROXIMATE.
 - PROVIDE 24" LONG FLANGED SPOOL PIECE FOR 14", 18" & 20" DUCTS AS SHOWN.
 - FOR FRP DUCT SEE SPECIFICATION SECTION 15060.

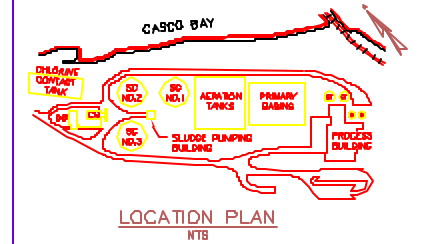

DATE	APP'D	REVISIONS	PROJECT PRINTS
4-4-01 <td></td> <td></td> <td>ISSUED FOR BIDDING</td>			ISSUED FOR BIDDING
3-4-01 <td></td> <td></td> <td>ISSUED FOR BIDDING</td>			ISSUED FOR BIDDING
			WALL SECTION
			DOOR SECTION
			FLOORING

DRAWN BY: JML	CHECKED BY: JML	DATE: 3-24-01
APPROVED BY: JML	DATE: 3-24-01	
BOOK NO. 27050A	PROJECT NO. 27050A	SCALE: 1/8"=1'-0"

PORTLAND WATER DISTRICT	Wright-Pierce
PORTLAND, MAINE	99 Main Street, Topsham, Maine USA 04086
PRIMARY SEDIMENTATION BASINS	TEL (207) 725-8721 FAX (207) 259-8414
UPGRADE WITH ODOR CONTROL FACILITIES	
ODOR CONTROL SITE LAYOUT	

DWG M-2
51 OF 79