



BRICK SIDEWALK CONSTRUCTION IS TO OCCUR AS PART OF A SEPARATE CONTRACT. REFER TO NOTES ON SHEET C-2 OF SITE DRAWINGS

CURBING GENERAL NOTE:

EXISTING GRANITE CURB ON LEFT SIDE OF NORTH STREET TO REMAIN EXCEPT WHERE REMOVAL IS REQUIRED FOR DRIVEWAYS, AND WHERE RESETTING IS REQUIRED FOR ADA RAMPS AND IN FRONT OF THE BUS LOOP. NEW CURB WILL BE REQUIRED FOR CATCH BASIN INLETS FOR RADI AND NEW OR SALVAGED CURB WILL BE REQUIRED WHERE EXISTING DRIVEWAYS ARE TO BE REMOVED. WHERE CURB IS REMOVED, THE PAVEMENT IS TO BE SAWCUT @ 16.11' LT AND GROUND FROM 14.11' TO 16.11' LT. SEE TYPICAL NOTE ON NEXT SHEET.

TYPICAL NOTE:

EXISTING PAVEMENT ON NORTH STREET IS TO REMAIN IN PLACE EXCEPT WHERE NOTED. THE CONTRACTOR SHALL PROTECT THE PAVEMENT SURFACE THROUGHOUT CONSTRUCTION.

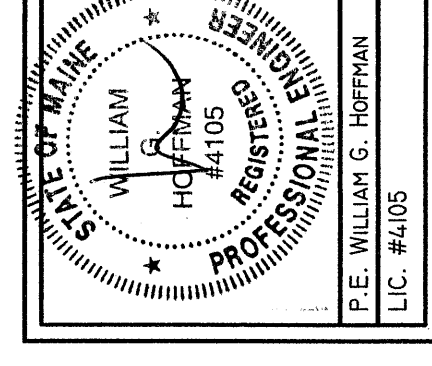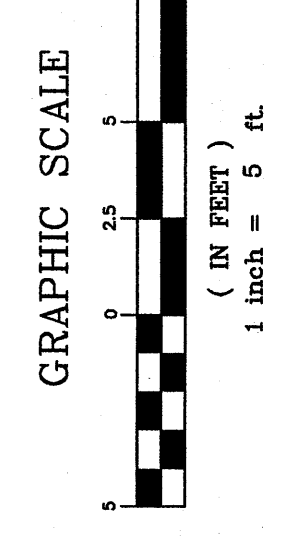

P. E. WILLIAM A. HOFFMAN
L.L.C. MAJES

11 Danforth Street
Portland, Maine 04103
789 Main Street, Suite 8
Portland, Maine 04106
207.782.9111
207.782.9106
eng@hoffman.com

Consultants
Civil Engineer
Professional Associates
License No. 11415
Carlton Associates
Structural Engineer
Professional & Other
Mechanical Engineer
Professional & Other
Barrett Design
Barrett Design
Barrett Design
Barrett Design
Barrett Design
Barrett Design
Barrett Design
Barrett Design

Job No.: 2770
Date: February 24, 2014
Drawn by: [blank]
Checked by: [blank]
Drawing Title: North Street Cross Sections
NS-C
6