


PROJECT NORTH

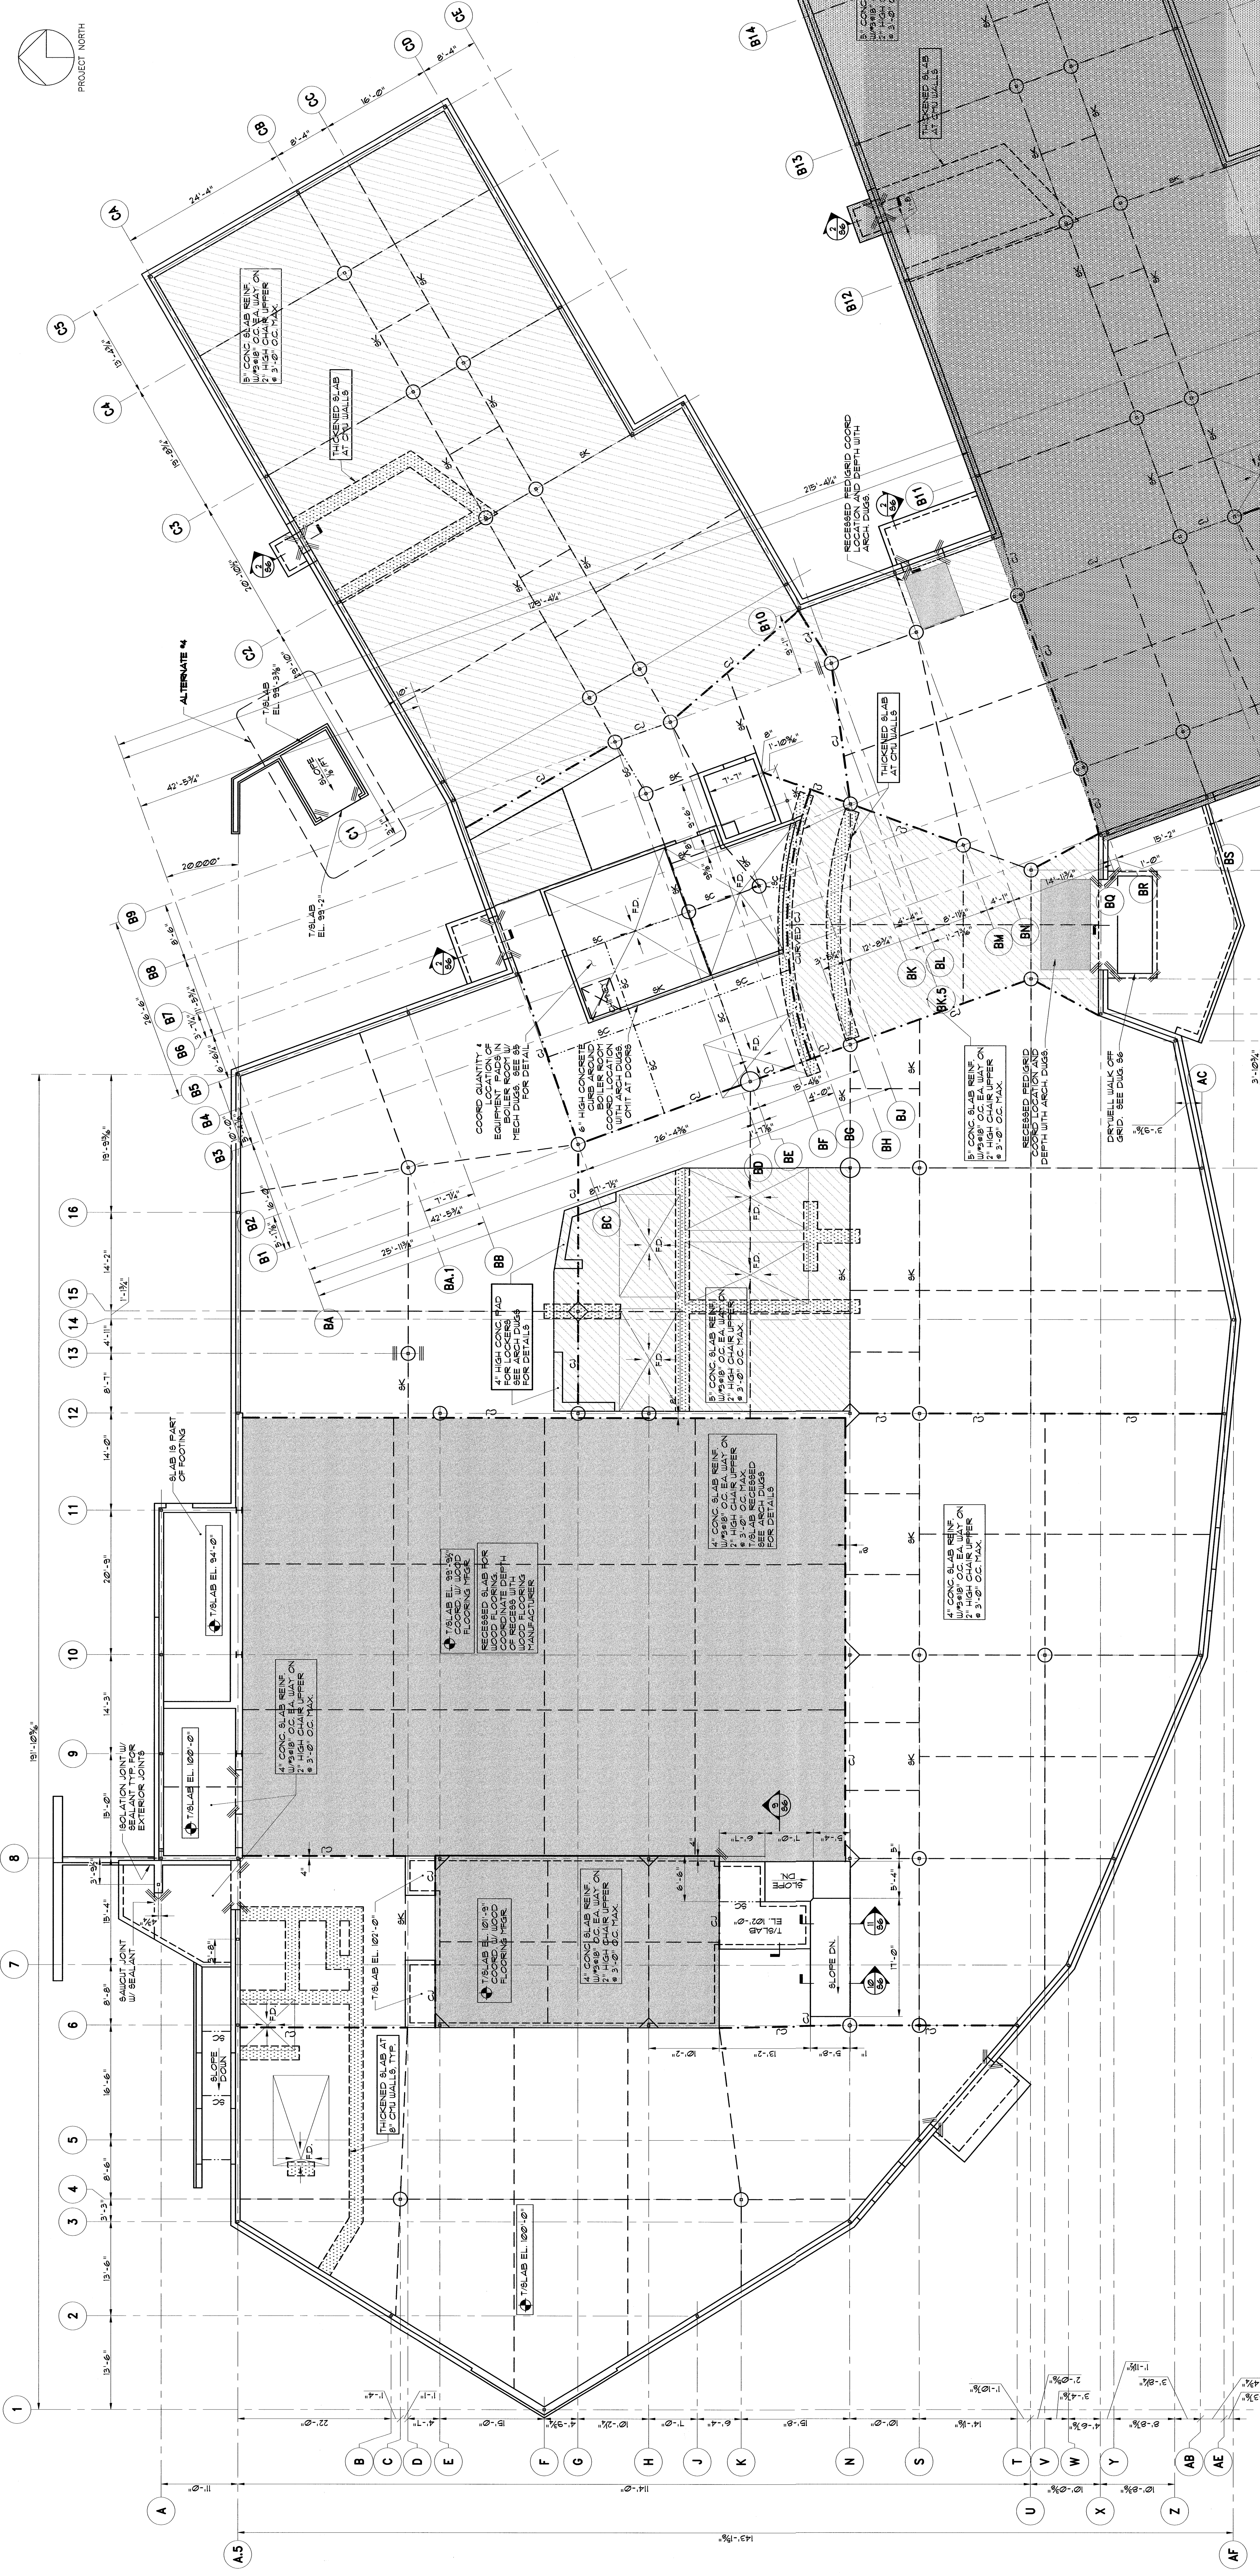

	East End Elementary School Portland, Maine	Job No.: 0399 Date: July 15, 2014 Scale: AS SHOWN Checked by: SMO	Drawing Title: Slab Plan North	
	Consultants: Civil Engineer Landscape Architect Structural Engineer Mechanical Engineer Electrical Engineer Architectural Designer Interior Designer T/M Consulting Green Consultant Fire Solutions	Delucchi/Hoffman Associates Control Associates Prillman & Greer Bennett Engineering Portland Design Kismet Design T/M Consulting Green Consultant Fire Solutions	10 Dunham Street Portland, ME 04103 Phone: 207.761.9111 Fax: 207.761.9115 Email: info@delucchi.com	

- NOTE**
1. FIN. FL. ELEV. 100'-0" UNCL.
 2. FL. CONSTRUCTION JOINT
 3. SC. SAUCUT JOINT
 4. SK. SCORED KEY
 5. 4" CONC. SLAB
 6. 9" CONC. SLAB FOR RADIANT HEAT. COORD. RADIANT HEAT TUBING W/ MECH. DUGS.
 7. THICKENED CONC. SLAB @ CHU WALLS
 8. RECEDED CONC. SLAB
 9. ADDL. REIN. AT RE-ENTRANT CORNERS. SEE DUG S9 FOR DETAIL. NOT ALL LOCATIONS SHOWN.
 10. CONTRACTOR CHOOSES TO BOND OUT ADDITIONAL JOINTS OR CONSTRUCTION JOINTS AT CONTRACTOR'S OPTION WHERE SHOWN ON THE PLAN. OTHER JOINTS MAY BE SAUCUT.
 11. SEE DUG S10 FOR COLORED CONCRETE SLAB LOCATIONS.
 12. SCORED KEY JOINTS. INSTALL SCORED KEY ALONG JOINT WITH JOINT OF SLAB TO BE BELOW SLAB SURFACE. AFTER BACKER ROD AND SEALANT ARE SHOWN FOR SAUCUT JOINTS, INSTALL SCORED KEY JOINTS IN PARKING GARAGE SLABS. INSTALL (IMMEDIATELY) BESIDE COLUMN PIER. ETC USE NO. 6388 (REMOVABLE PLASTIC CAP TO FORT-GROOVE FOR SEALANT. DO NOT BURY CAP WHERE 57-AES FOR SCORED KEY. PENETRATE VAPOR RETARDER SEAL WITH TAPE AS RECOMMENDED BY THE VAPOR RETARDER MFR.

NOTE: CONTRACTOR CHOOSES TO BOND OUT ADDITIONAL AREAS IN SLABS ON GRADE (E.G. AREAS SLOPING TO DRAINAGE) TO ADDITIONAL CONSTRUCTION JOINTS. PROVIDE AN ALLOWANCE FOR THESE ADDITIONAL JOINTS.

NOTE: FILL ALL EXTERIOR SLAB CONTROL JOINTS WITH SEALANT.

SLAB PLAN -- NORTH
 18'-11'-0"