

Project Title

U-HAUL MOVING & STORAGE

425 MARGINAL WAY
Portland, Maine

09 - 08 - 14 ISSUED FOR CONSTRUCTION

Mark Date Description


Issue Dates

Drawing Title

SYSTEMS


Drawing Number

A40.1

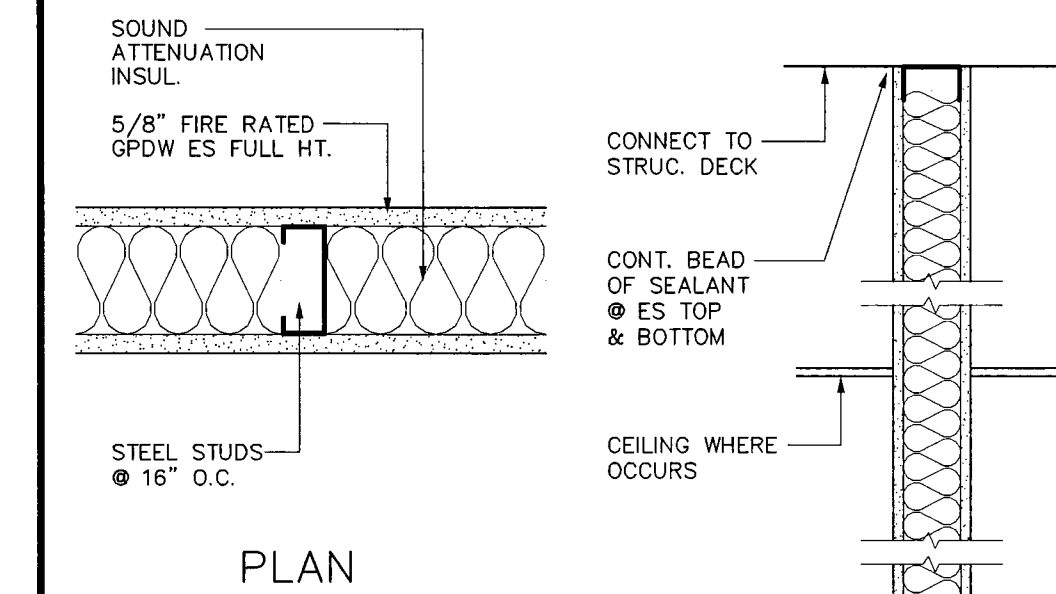


• SEE GENERAL NOTES

3 5/8" STEEL STUDS	224
1 HOUR RATED	U.L. No. U465
6" STEEL STUDS	226
1 HOUR RATED	U.L. No. U465

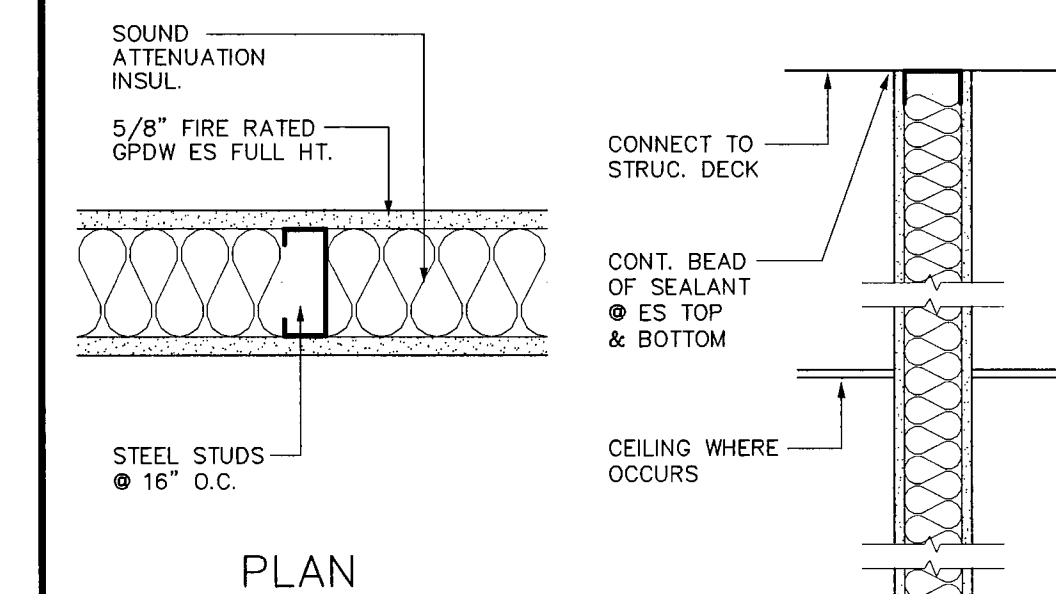

• SEE GENERAL NOTES

3 5/8" STEEL STUDS	214
UNRATED	N.A.
6" STEEL STUDS	216
UNRATED	N.A.

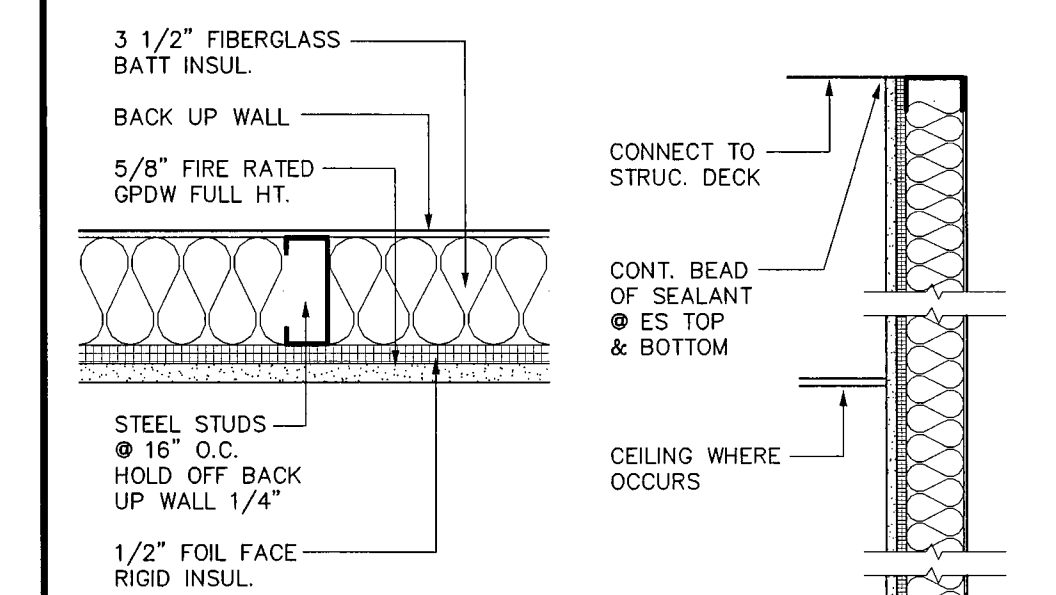

• SEE GENERAL NOTES

3 5/8" STEEL STUDS	114
UNRATED	N.A.
6" STEEL STUDS	116
UNRATED	N.A.

GENERAL NOTES


- PARTITIONS SHALL BE CARRIED TO THE FLOOR DECKING OF THE FLOOR ABOVE UNLESS NOTED OTHERWISE
- IN BATH ROOMS, TOILET ROOMS, TRASH ROOMS, RECYCLING ROOMS, JANITOR ROOMS, MAINTENANCE ROOMS W/ GPDW WALLS, PROVIDE 5/8" MR GPDW IN LIEU OF REGULAR GPDW ON ALL PARTITIONS WITHIN THE ROOM
- ALL GPDW TO BE TYPE-X GPDW
- ALL MR GPDW TO BE TYPE-X MR GPDW
- INSTALL A CONTINUOUS BEAD SEALANT BETWEEN ALL TOP AND BOTTOM WALL PLATES AND THE FLOOR & STRUCTURAL DECKING ABOVE.

STUD OR CMU SIZE	010	2 HR RATED
2X4 WOOD STUDS	010	1 HR RATED
1 HR FIRE-RATED	010	PARTITION OR WALL TAG No.
FIRE-RATING	U.L. No. U465	IF APPLICABLE

PARTITION LEGEND

NO SCALE

A1

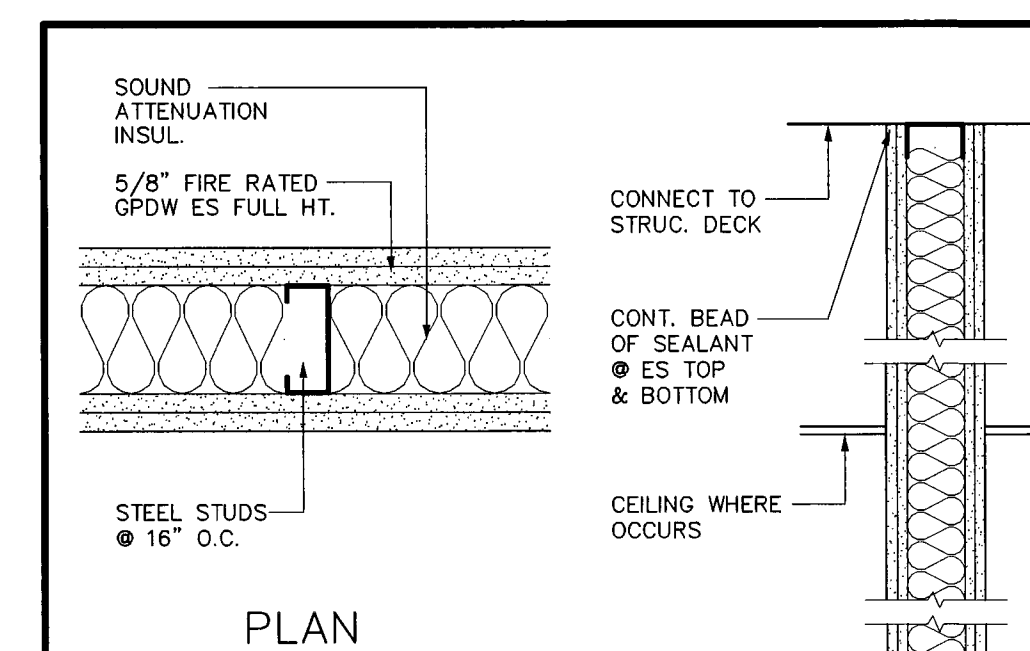

• SEE GENERAL NOTES

3 5/8" STEEL STUDS	324
2 HOUR RATED	U.L. No. U411
6" STEEL STUDS	326
2 HOUR RATED	U.L. No. U411