

**Norris Inc**

2257 West Broadway

South Portland, ME 04106

1-800-370-3473

**FAVREAU ELECTRIC**

PO BOX 598

BRUNSWICK, ME 04011

Tel:207-725-2005 Fax:207-725-2920

**319727SP****Equipment List : Status: 4 Submittals****MMC Brighton Ave  
Wound Care Addition****Description**

NOTIFIER-DR-D4B, Blank Door, lock & keys. Accepts 4 chassis, black.

NOTIFIER-SBB-D4, BB, 4 chassis, black.

NOTIFIER-HPFF12CM, 12A 24VDC F/A NPS, chassis120V

IM-1270, 12V 7AH Battery

NOTIFIER-DAA2-7525, Digital Amplifier 75W, 25V, 120 VAC

IM-12120, 12 Volt 12 AH Battery

NOTIFIER-FSP-851, Intelligent Address Photo detector w/ FlashScan.

NOTIFIER-B210LP, Conventional Flanged mnt. Base

NOTIFIER-ET70-24MCW-FR, 8W Speaker Strobe, Wall, Red, Multi Cd

NOTIFIER-STR, Strb, R, Wall, 2 wire, 12/24V, multi-Cd

# DAA2 Series

## Digital Audio Amplifiers



Voice Control Systems

### General

The DAA2 Series amplifiers are multi-featured amplifiers with digital audio functionality. Each DAA2 is capable of accessing and processing one of up to eight audio channels on the DVC audio loop, amplifying the signal, and distributing it via four Class B or two Class A outputs. A DAA2-50 or DAA2-75 series amplifier is capable of mounting an optional BDA Digital amplifier, which can be used to provide one-to-one amplifier backup, or to support two-channel operation, or increased output wattage to 100W (100W option applies to DAA2-50 series only, other rules apply).

The DAA2 has two wire digital audio ports to connect to wire DAL (digital audio loop) segments. Either or both ports may be converted to fiber using fiber option modules.


Up to 32 devices, such as DAA2 amplifiers, can be connected to the DAL on one DVC Digital Voice Command unit. DAA2 amplifiers may be mixed with DAX and DAA series amplifiers on the same DAL.

An optional Firefighter telephone riser on the DAA2 supports local and network FFT communications. A DAA2 also supports use of an RM-1 remote microphone.

DAA2 amplifiers can store backup alarm and trouble messages, and provide an adjustable background music input.

### Features

- Listed to UL Standard 864, 9th edition.
- 50 W total output power at 25 V<sub>RMS</sub> (all DAA2-5025 models) or 70 V<sub>RMS</sub> (all DAA2-5070 models).
- 75 W total output power at 25 V<sub>RMS</sub> (all DAA2-7525 models).
- Supports two Class A high-level audio outputs; or four Class B outputs.
- Optional BDA amplifiers support alternative configurations.
  - Backup amplifier - supports one-to-one backup (all DAA2 models).
  - Primary amplifier - supports two-channel operation (all DAA2 models).
  - Primary amplifier - increase power up to 100W, one- or two-channel operation. (DAA2-50 series only, configuration rules apply.)
- Supports one-to-many amplifier backup applications using the same model DAA2.
- Firefighter telephone riser supports 7 active firefighter telephones. System Release 3.0 and higher supports optional configurations: direct connection for up to 7 firefighter telephones, or connection to multiple FTM-1 modules.
- Remote microphone paging option with RM-1.
- Audio output activation via network control-by-event equations resident within the DVC.
- Two wire digital audio ports that can be converted to fiber using fiber option modules. Support Style 4 or 7 configurations.
- Auxiliary input for 1 V<sub>RMS</sub>, to be used for background music input, an interface with a telephone paging source, or other compatible audio sources. Audio levels can be adjusted by end user. Optional supervision through programming.
- Isolated alarm bus input, to be used for backup activation of alarm messages when normal digital communication is lost.

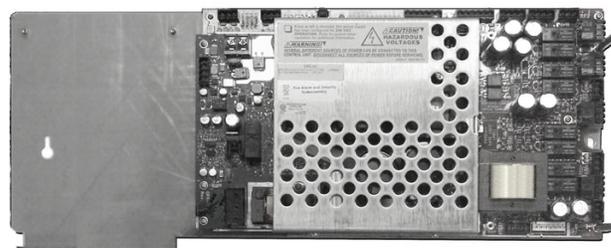

- Programmable through **VeriFire® Tools**.
- Up to 106 seconds of backup digital message storage for use in the event of communication loss (from the **VeriFire® Tools** message library, or created by the installer).
- Battery charger disable provides battery sharing option for up to four DAA2s.
- Disconnect of deeply-discharged battery (low battery disconnect).

### Installation

The DAA2 arrives from the factory already installed on its chassis. The DAA2 mounts in one row of any EQ or CAB-4 Series cabinet: The CAB-4 row can be covered using a DP-1B dress panel, ordered separately.

One or two fiber option modules will plug directly onto a DAA2 for simple installation. A BDA backup amplifier mounts directly onto a DAA2.

Batteries for the DAA2 may be installed in any of the following configurations:

- In a CHS-BH1 optional battery chassis. The CHS-BH1 battery chassis will hold two 12.0 AH batteries, and mounts on the left side of the DAA2 chassis, so that the DAA2 and batteries are contained in a single cabinet tier.
- In the battery row (bottom) of the CAB-4 Series cabinet, or in the bottom row of an EQ Series cabinet.
- In a cabinet adjacent to the cabinet that holds the DAA2, with connections in conduit. External battery charging is supported.

### Specifications

#### CPS-24 POWER SUPPLY BOARD

- **AC power (TB1):** 120 VAC, 60 Hz input;
- DAA2-5025 - 4.68A max.

- DAA2-5070 - 4.69A max.
- DAA2-7525 - 4.68A max.
- “E” versions, 220-240 VAC, 50/60 Hz input:
- DAA2-5025E - 2.68A max.
- DAA2-5070E - 2.68A max.
- DAA2-7525E - 2.68A max.

**Recommended wiring:** 12 to 14 AWG (1.6 mm O.D.) with 600 VAC insulation.

**Secondary Power 5V and 24V AUX Outputs (TB2):**

24 V AUX: Power-limited, 24V @ 0.5A, utilizes wire sizes 12-18 AWG (3.31 mm<sup>2</sup> - 2.08 mm<sup>2</sup>).

5 V: Future Use.

**Battery Connections:** Supplied cable connections to batteries.

**Battery Charger:** Current-limited sealed lead acid battery charger which charges two 12 volt batteries in series, up to 200 AH.

	Charge 7AH to 26AH Batteries	Charge 26 AH to < 50 AH Batteries	Charge 50 AH to 200 AH Batteries
DAA2-5025 DAA2-5070	Yes	Yes	Yes
DAA2-7525	Yes	Yes	No
DAA2-5025 or DAA-5070 w/BDA in Group 2 of VeriFire® Tools.	No	No	No

**Battery Charging Capabilities**

**DAA2 BOARDS**

**Digital Audio Ports, wire media, A and B (TB2, TB3):** Maximum distance per segment is 1900 feet (579.12 m) on Belden 5320UJ (18AWG, TP) FPL cable: 18 AWG (0.821 mm<sup>2</sup>) twisted-pair, unshielded, power-limited. For approved cable types, see wiring documentation, P/N 52916ADD: C *Approved Wire Cables for Digital Audio Loops.*

**Digital Audio Ports, fiber media, fiber option modules:**

Digital audio loop connectors support single- and multi-mode fiber with the use of fiber option modules. Refer to the Fiber Option Module datasheet for fiber specifications.

**Alarm Bus:** Power-limited, supervised by source. Recommended wiring: 14-18 AWG twisted-pair. Requires 16VDC minimum @ 20mA across the terminals to activate. Nominal 24VDC.

**Remote Microphone Interface:** RMI power: +24VDC, power-limited @ 100mA. Supervised. Recommended wiring: 14-18 AWG twisted-pair, Max. 14 AWG. Nominal AC signal strength 2.5V<sub>RMS</sub>, 3V<sub>RMS</sub> Max. Maximum distance between remote microphone and DAA2: 100 ft (304.8 m).

**FFT Riser:** Power-limited output, supervised. Class A or Class B operation. Class B 2-wire connections require a 3.9k ohm 1/2 watt resistor (P/N R-3.9K). Max. wiring resistance (including individual telephone zone to last handset) permitted is 50 ohms, 10,000 ft (3048 m) max. wiring distance at 14 AWG to last handset.

**Auxiliary Input:** Signal strength from low-level analog audio input (such as background music or telephone paging): 1V<sub>p-p</sub> max. Optional supervision through programming. Recommended wiring: 14-18 AWG, twisted-pair. Auxiliary input source must be within 25 ft. (7.6 m) of the DAA2, and within the same room.

**Speaker circuits:** Power-limited outputs (exception: a DAA2-5070 speaker circuit used with any Canadian Room Isolator module is non-power limited. Speaker circuit 1 (TB10) can not be used.). Supervision determined by programming. DAA2-5025/70, Each circuit rated up to 50 watts\*. DAA2-7525, each circuit rated up to 75 watts\*. Recommended wiring: 12-18 AWG twisted-pair (shielded recommended). Class B or Class A: Class B requires 20k end-of-line resistors (included, P/N ELR-20K). Class A requires 10k end-of-line resistors

(included, P/N R-10K) on the return.

\*total wattage may vary per configuration.

**Backup:** High-level audio input: 25V<sub>RMS</sub> (DAA2-5025 and DAA2-7525). 70 V<sub>RMS</sub> (DAA2-5070). Recommended wiring: 14-18 AWG. Not supervised when inactive. Supervised by backup source when active. Must be in same room or enclosure.

**Standards and Codes**

The DAA2 Series Digital Audio Amplifiers comply with the following standards:

- NFPA 72 2007 National Fire Alarm Code
- Underwriter Laboratories Standard UL 864
- Underwriter Laboratories of Canada (ULC) ULC-S527-99 Standard of Control Units for Fire Alarm Systems.
- Part 15 Class A conducted and radiated emissions as required by the FCC.

**Listings and Approvals**

These listings and approvals apply to the basic DAA2 Series Digital Audio Amplifiers. In some cases, certain modules may not be listed by certain agencies, or listing may be in process. Consult factory for latest listing status.

- UL Listed S635
- ULC Listed: S635
- CSFM: 7165-0028:0234 (NFS2-640/NFS-320), 7165-0028:0224 (NFS2-3030)
- FDNY: #6067 (NFS2-640/NFS-320), #6065 (NFS2-3030)

## **Product Line Information**

### **50 WATT DAA2 AMPLIFIERS**

Shipped mounted to the chassis.

**DAA2-5025:** 120 VAC Digital Audio Amplifier (50 W, 25 V<sub>RMS</sub>).

**DAA2-5070:** 120 VAC Digital Audio Amplifier (50 W, 70 V<sub>RMS</sub>).

**DAA2-5025E:** 220-240 VAC Digital Audio Amplifier (50 W, 25 V<sub>RMS</sub>).

**DAA2-5070E:** 220-240 VAC Digital Audio Amplifier (50 W, 70 V<sub>RMS</sub>).

### **75 WATT DAA2 AMPLIFIERS**

Shipped mounted to the chassis.

**DAA2-7525:** 120 VAC Digital Audio Amplifier (75 W, 25 V<sub>RMS</sub>).

**DAA2-7525E:** 220-240 VAC Digital Audio Amplifier (75 W, 25 V<sub>RMS</sub>).

### **BDA BACKUP DIGITAL AMPLIFIERS**

**BDA-25V:** Backup Digital Amplifier (25 V<sub>RMS</sub>), switch settings for 75, 50, and 35 W operation. Provides a second audio channel when programmed as a primary amplifier.

**BDA-70V:** Backup Digital Amplifier (70 V<sub>RMS</sub>), switch settings for 50 and 35 W operation. Provides a second audio channel when programmed as a primary amplifier.

### **FIBER OPTION MODULES**

**DS-FM:** Fiber option module for multi-mode fiber. Converts a wire DAP (digital audio port) to a multi-mode fiber port.

**DS-SFM:** Fiber option module for single-mode fiber. Converts a wire DAP (digital audio port) to a single-mode fiber port.

**DS-RFM:** Fiber option module for multi-mode fiber. Used exclusively for compatibility with multi-mode fiber DVC or DAA.

### **ACCESSORIES**

**CHS-BH1:** Battery chassis: holds two 12.0 AH batteries. Mounts on the left side of the DAA2 chassis.

**DP-1B:** Dress panel: covers one tier of CAB-4 Series cabinet.

**ACT-25, ACT-70:** Audio-coupling transformers. Used with AA-30 or DAA2-series amplifiers to drive thousands of amplifiers in large system applications.

---

NOTIFIER® and Veri-Fire® are registered trademarks of Honeywell International Inc.  
©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.  
[www.notifier.com](http://www.notifier.com)

## HPFF12, HPFF12CM, HPFF12E, HPFF12CME

### NAC Expander/Power Supply

#### Description

The Honeywell HPFF12(E) and HPFF12CM(E) are Notification Appliance Circuit (NAC) Expander Power Supplies designed to extend the power capabilities of existing NACs and provide power for auxiliary devices. The HPFF12 and HPFF12CM connects to any 12 or 24V Fire Alarm Control Panel (FACP) or operates stand-alone.

They provide regulated and filtered 24VDC power to four NAC's and an auxiliary output. The NAC outputs are rated at 3.0 amps each and the auxiliary output is rated at 2.0 amps (this output is continuously supplied, even in alarm, and therefore must be taken into account for power supply loading and battery size calculations). The combined output cannot exceed 12.0 amps.

The HPFF12 and HPFF12CM provide independent output circuit supervision so in the event of a NAC fault they can notify the attached FACP. In addition they have a trouble memory feature that displays past troubles (by NAC) for rapid diagnostics. Synchronization is built in for five appliance brands.

The HPFF12 and HPFF12CM have two fully independent supervised initiating circuits that can be used for synchronized strobes and coded horns. Their NAC outputs may be configured as any of the following:

- four Class B (Style Y)
- two Class A (Style Z)
- two Class B and one Class A
- four Class A with the optional HPP31076 Class A adapter

These power supplies contain an internal Battery charger capable of charging up to 26.0 amp-hour (AH) batteries.


The HPFF12 is mounted in a lockable wall cabinet that can accommodate up to two 18AH batteries. The HPFF12CM is designed to mount in Honeywell's large equipment enclosure (EQBB-D4; order separately). Up to three HPFF12CM supplies can be mounted in a D-sized EQ cabinet in positions 2, 3, and 4. Each HPFF12CM can accommodate two 12AH batteries.

One of the most challenging aspects of a retrofit application is locating the existing End-of-Line (EOL) resistor. In these applications that have EOL values other than the 3.9k normally used with the HPFF12, a single resistor matching the existing EOL can be used as a reference for all the outputs. This feature speeds installation and system checkout because the actual EOL does not need to be located and changed in the circuit. The reference resistor must be within the range of 1.9k to 25k.

**NOTE:** 4 separate programming resistors for the HPFF12 are provided in the hardware kit shipped with each HPFF12(E) and HPFF12CM(E). They are 3.9K (5 of these are provided, need only 1 for programming), 2.2K (1 each), 4.7K (1 each) and 10K (1 each)


#### Features

- Listed to UL Standard 864, 9th edition.
- Four (4) power limited supervised notification application circuits (NAC's) capable of supplying +24VDC at 3.0 amp maximum each.
- NAC output circuits may be configured as any of the following:
  - Four Class B (Style Y).

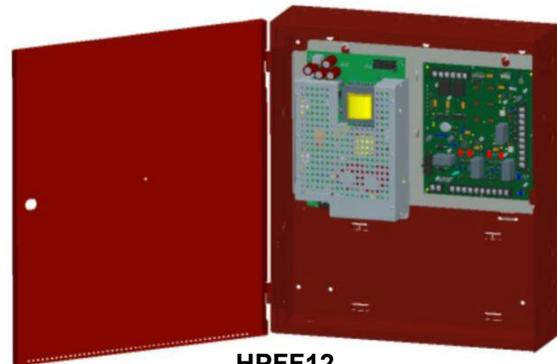

HPFF12

60547 cov.jpg

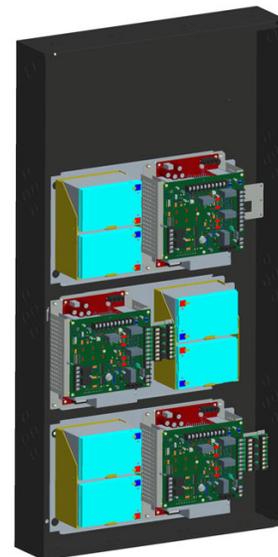

HPFF12CM:  
Three modules in EQBB-D4

- Two Class B & one Class A.
- Two Class A (Style Z).
- Four Class A (requires the HPP31076 Class A adapter).
- Four field-programmable operational modes:
  - Pass-through.
  - Temporal generator.
  - Sync generator.
  - Pass-through Filtered.
- Temporal coding and sync protocols compatible with the following notification appliance brands:
  - System Sensor.
  - Faraday.
  - Amseco.
  - Cooper-Wheelock.
  - Gentex.
- Protocol pass-through for synchronizing large systems.
- Two fully independent supervised input/output control circuits.
- Redundant activation operation for survivability.
- Supports FACP's Selectable Silence ability.
- 2.0 amp auxiliary continuously supplied output.
- Eight status LEDs.

- Supervised AC input, battery voltage, auxiliary output, charger, and earth ground faults.
- Trouble indication for supervision of the following:
  - NAC circuits.
  - Auxiliary output.
  - AC input.
  - Battery charger voltage.
  - Earth ground faults.
- Optional two-hour delay for AC loss.
- Separate Trouble and AC Fail Form-C relay contacts.
- The Trouble Form-C relay contacts selectable for immediate or a 2 hour delay with AC failure.
- 26 AH battery charger capability:
  - HPFF12(E) supports two 12V 18AH batteries
  - HPFF12CM(E) supports two 12V 12AH batteries per unit.
- NAC Overload protection and indication.
- Provision for mounting single or 6 circuit addressable control or relay modules inside the enclosure. (Use mounting kit PN 90475.)

## Specifications

**Primary Input Power:** 120VAC, 60Hz, 5.4A standard; 240VAC, 50Hz, 3.2A on units with E suffix.

**Secondary Power:** 24 volt operation: two 7-26 AH batteries.

**Battery Charging Capacity:** Up to 26 AH batteries.

**HPFF12 Cabinet:** Holds up to two 18AH batteries.

**HPFF12CM:** Holds up to two 12AH batteries.

**Total Output Current:** 12.0A max.

**Standby Current:** 0.075 A.

**Auxiliary Power Output:** 2.0A under all conditions.

**NAC Output Ratings:** 24VDC fully regulated, 3.0A max per circuit (12.0A total).

**End-of-Line Resistor Range:** 1.9K to 25k ohm, ½ watt. Product ships with 4 separate programming resistors. They are 3.9K (5 each - only need one for programming), 2.2K (1 each), 4.7K (1 each) and 10K (1 each)

**Common Trouble:** 2.0A at 30VDC.

**Relay Fail Relay:** 2.0A at 30VDC.

**Input Control Circuits:** compatible with 12 and 24 VDC control panel NACs.

**Input Control Current (alarm):** 5.68 mA @ 12 VDC, 12.28 mA @ 24 VDC.

**Temperature Rating:** 32°F to 120°F (0°C to 49°C).

**Relative Humidity:** 10% to 93% non-condensing.

## Cabinet Dimensions:

- **HPFF12 Cabinet:** 16.65" W x 19.0" H x 5.2" D (42.29 W x 48.26 H 13.23 D cm)
- **Large equipment enclosure (EQBB-D4):** 24" W x 45.9" H x 5.15" D (60.96 W x 116.52 H x 13.1D cm)

## Product Line Information

**HPFF12:** 12.0A fire rated power supply. Unit includes red enclosure, battery cable and installation instructions. 120VAC/60Hz.

**HPFF12E:** 240VAC/50Hz version of HPFF12.

**HPFF12CM:** 12.0A fire rated power supply (chassis mounted). Unit includes mounting hardware, battery cable and instructions for installation in large equipment enclosure. 120VAC/60Hz.

**HPFF12CME:** 240VAC/50Hz version of HPFF12CM.

**HPP31076:** Class A (Style Z) NAC Adaptor. Increase Class A circuits from 2 to 4.

**Large Equipment Enclosure:** EQ series cabinet for mounting HPFF12CM power supplies consists of a backbox (EQBB-D4) and a locking door (EQDR-D4 or FCI-VDR-D4B). Order separately.

**CMF-300-6:** Six-circuit supervised addressable control module activated through FACP programming on a select basis to control power supply activation or output.

**CMF-300:** Supervised addressable control module activated through FACP programming to activate power supply.

**BAT-12120:** Battery, 12 volt, 12.0 AH (two required).

**BAT-1270:** Battery, 12 volt, 7.0 AH (two required).

**90474:** Mounting kit; required to attach an addressable module onto the control circuit board (included with supply).

## Listings and Approvals

Listings and approvals below apply to all. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Listed under UL 864 9th Edition.

- **UL Listed:** S24562
- **FM Approved**

---

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. System Sensor® is a registered trademark of Honeywell International Inc. ©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

## Automation and Control Solutions

Honeywell

12 Clintonville Road  
Northford, CT 06472-1610  
www.honeywellpower.com

1(877) HPP-POWER  
hpp\_techserv@honeywell.com

DH-60547:C1  
August 2010  
Made in the U.S.A.  
© U.S. Registered Trademark  
© 2010 Honeywell International Inc.  
Page 2 of 2



# Honeywell

# BAT Series Batteries

## Sealed Lead-Acid or Gell Cell


**Power Supplies**

### General

**BAT Series Batteries** feature a new part-numbering/listing system — providing an improved method of delivery for NOTIFIER-approved sealed lead-acid batteries for all your fire alarm system needs. Multiple brands of batteries are now offered under generic part numbers, reducing backorder situations and permitting us to deliver these products in a more timely fashion. NOTIFIER has approved the multiple brands listed below as possible product shipped for a given part number. Please note that any incoming orders for “PS Series” batteries will be converted to the equivalent BAT Series part numbers.



6933cov.jpg

### Features

- Provide secondary power for control panels.
- Sealed and maintenance-free.
- Overcharge protected.
- Easy handling with leakproof construction.
- Ruggedly constructed, high-impact case (ABS, polystyrene, or polypropylene, depending on models).
- Long service life.
- Compact design.

### Agency Listings and Approvals

The listings and approvals below apply to BAT Series Batteries. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Recognized Components:** files MH19884 (*B & B Battery*), MH20567 (*UPG, previously Jolt*), MH20845 (*Power-Sonic*).

### Part Number Reference

CURRENT Part Number	BATTERY DESCRIPTION	ALTERNATES APPROVED: manufacturers and P/Ns shipped under BAT P/Ns
BAT-1250	12 V, 5 AH, sealed.	BP5-12 (B&B Battery); PS-1250 (Power-Sonic); SA1250 (Jolt) to be replaced with UB1250 (UPG).
BAT-1250	12 V, 5 AH, sealed.	BP5-12 (B&B Battery); PS-1250 (Power-Sonic); SA1250 (Jolt) to be replaced with UB1250 (UPG).
BAT-1270	12 V, 7 AH, sealed.	BP7-12 (B&B Battery); PS-1270 (Power-Sonic); SA1272 (Jolt) to be replaced with UB1270 (UPG).
BAT-12120	12 V, 12 AH, sealed.	BP12-12 (B&B Battery); PS-12120 (Power-Sonic); SA12120 (Jolt) to be replaced with UB12120 (UPG).
BAT-12180	12 V, 18 AH, sealed.	PS-12180 (Power-Sonic); SA12180 (Jolt) to be replaced with UB12180 (UPG).
BAT-12180	12 V, 18 AH, sealed.	PS-12180 (Power-Sonic); SA12180 (Jolt) to be replaced with UB12180 (UPG).
BAT-12260	12 V, 26 AH, sealed.	BP26-12 (B&B Battery); PS-12260 (Power-Sonic); SA12260 (Jolt) to be replaced with UB12260 (UPG).
BAT-12550	12 V, 55 AH, sealed.	PS-12550 (Power-Sonic); XSA12550 (Jolt) to be replaced with UB12550 (UPG).
BAT-12550	12 V, 55 AH, sealed.	PS-12550 (Power-Sonic); XSA12550 (Jolt) to be replaced with UB12550 (UPG).
BAT-121000	12 V, 100 AH, gell cell.	PS-121000 (Power-Sonic); XSA121000A (Jolt) to be replaced with UB121000 (UPG).


# POWER-SONIC

1109t1.tbl



## Part Number Reference

MODEL	Nominal Voltage V	Nominal Capacity @ 20 hr. rate A.H.	Discharge Current @20 hr. rate mA	DIMENSIONS									
				Width		Depth		Height		Height over terminal		Weight	
				in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg.
PS-1250	12	5	250	3.54	90	2.76	70	4.02	102	4.21	107	4.1	1.9
PS-1270	12	7	325	5.94	151	2.56	65	3.7	94	3.86	98	5.7	2.6
PS-12120	12	12	600	5.94	151	3.86	98	3.7	94	3.86	98	8.8	4
PS-12180	12	18	875	7.13	181	2.99	76	6.57	167	6.57	167	12.8	5.8
PS-12250	12	25	1300	6.89	175	6.54	166	4.92	125	4.92	125	18.7	8.5
PS-12550	12	55	3000	10.25	260	6.6	168	8.2	208	9.45	240	39.7	18
PS-121000	12	100	5000	12	305	6.6	168	8.2	208	9.45	240	65.7	29.8

**Characteristic Discharge Curves**

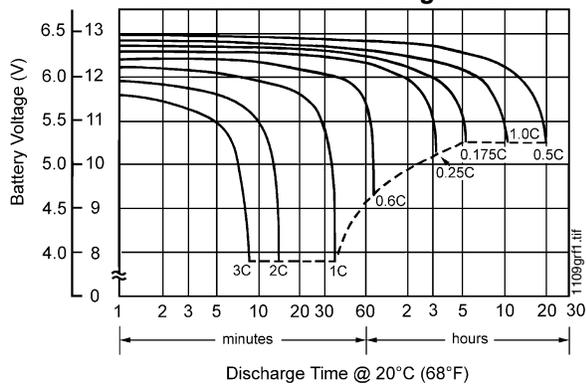


**Effect of Temperature on Capacity**

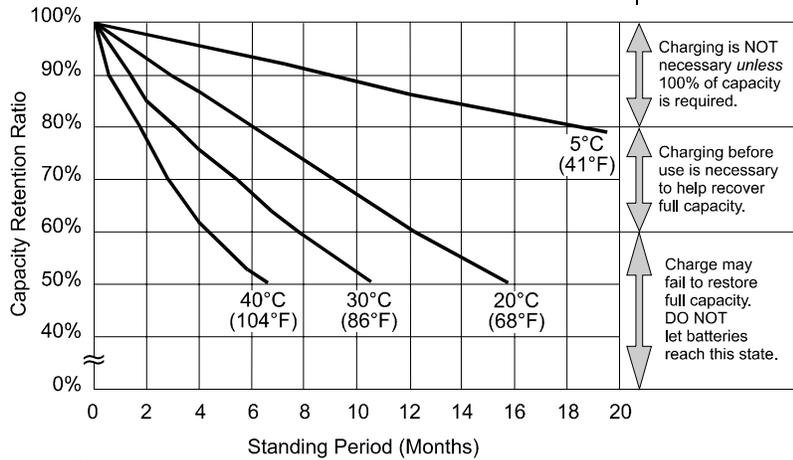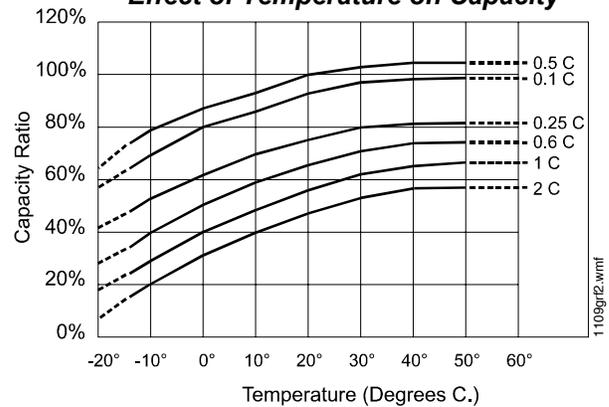

**at left:  
PS-121000  
Shelf-Life  
and Storage**

Charging is NOT necessary unless 100% of capacity is required.  
Charging before use is necessary to help recover full capacity.  
Charge may fail to restore full capacity. DO NOT let batteries reach this state.

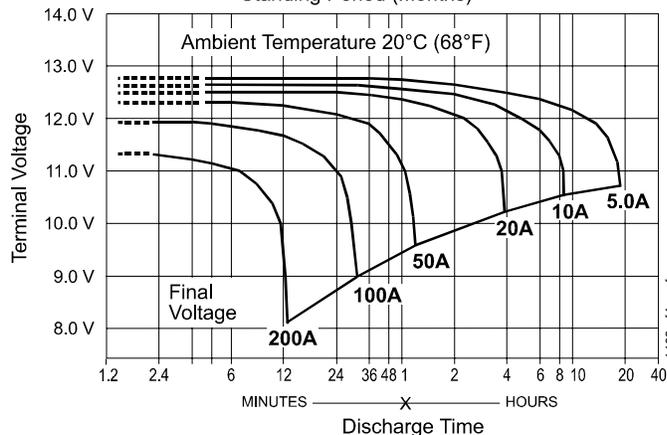

**at left:  
PS-121000  
Discharge  
Characteristics**

# FSP-851(A) Series

## Intelligent Plug-In Photoelectric Smoke Detectors with FlashScan®



Intelligent/Addressable Devices

### General

Notifier FSP-851(A) Series intelligent plug-in smoke detectors with integral communication provide features that surpass conventional detectors. Detector sensitivity can be programmed in the control panel software. Sensitivity is continuously monitored and reported to the panel. Point ID capability allows each detector's address to be set with rotary, decimal address switches, providing exact detector location for selective maintenance when chamber contamination reaches an unacceptable level. The FSP-851(A) photoelectric detector's unique optical sensing chamber is engineered to sense smoke produced by a wide range of combustion sources. Dual electronic thermistors add 135°F (57°C) fixed-temperature thermal sensing on the FSP-851T(A). The FSP-851R(A) is a remote test capable detector for use with DNR(A)/DNRW duct detector housings. FSP-851(A) series detectors are compatible with Notifier Onyx and CLIP series Fire Alarm Control Panels (FACPs).

**FlashScan®** (U.S. Patent 5,539,389) is a communication protocol developed by Notifier that greatly increases the speed of communication between analog intelligent devices. Intelligent devices communicate in a grouped fashion. If one of the devices in the group has new information, the panel's CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of earlier designs.

### Features

- Sleek, low-profile design.
- Addressable-analog communication.
- Stable communication technique with noise immunity.
- Low standby current.
- Two-wire SLC connection.
- Compatible with FlashScan® and CLIP protocol systems.
- Rotary, decimal addressing (1-99 on CLIP systems, 1-159 on FlashScan systems).
- Optional remote, single-gang LED accessory.
- Dual LED design provides 360° viewing angle.
- Visible bi-color LEDs blink green every time the detector is addressed, and illuminate steady red on alarm (*FlashScan systems only*).
- Remote test feature from the panel.
- Walk test with address display (an address on 121 will blink the detector LED: 12-[pause]-1 (*FlashScan systems only*)).
- Built-in functional test switch activated by external magnet.
- Built-in tamper-resistant feature.
- Sealed against back pressure.
- Constructed of off-white fire-resistant plastic, designed to commercial standards, and offers an attractive appearance.
- 94-5V plastic flammability rating.
- SEMS screws for wiring of the separate base.
- Optional relay, isolator, and sounder bases.

### Specifications

**Sensitivity:** 0.5% to 2.35% per foot obscuration

**Size:** 2.1" (5.3 cm) high; base determines diameter.

- **B210LP(A):** 6.1" (15.5 cm) diameter.
- **B501(A):** 4.1" (10.4 cm) diameter.
- **B200S(A):** 6.875" (17.46 cm) diameter.



FSP-851(A) in B210LP(A) Base

B210-2951.jpg

- **B200SR(A):** 6.875" (17.46 cm) diameter.
- **B224RB(A):** 6.2" (15.748 cm) diameter.
- **B224BI(A):** 6.2" (15.748 cm) diameter.

**Shipping Weight:** 5.2oz. (147g).

**Operating Temperature range:** FSP-851(A), 0°C to 49°C (32°F to 120°F). FSP-851T(A), 0°C to 38°C (32°F to 100°F). Low temperature signal for FSP-851T(A) at 45°F +/- 10°F (7.22°C +/- 5.54°C). FSP-851R(A) installed in a DNR(A)/DNRW, -20°C to 70°C (-4°F to 158°F).

**UL/ULC Listed Velocity Range:** 0-4000 ft/min. (1219.2 m/min.), suitable for installation in ducts.

**Relative Humidity:** 10%-93% noncondensing.

**Thermal Ratings:** Fixed-temperature setpoint 135°F (57°C).

### DETECTOR SPACING AND APPLICATIONS

Notifier recommends spacing detectors in compliance with NFPA 72. In low airflow applications with smooth ceiling, space detectors 30 feet (9.144m) for ceiling heights 10 feet (3.148m) and higher. For specific information regarding detector spacing, placement, and special applications refer to NFPA 72. *System Smoke Detector Application Guide*, document A05-1003, is available at [systemsensor.com](http://systemsensor.com)

### ELECTRICAL SPECIFICATIONS

**Voltage Range:** 15-32 volts DC peak.

**Standby Current (max. avg.):** 300µA @ 24VDC (one communication every five seconds with LED enabled).

**LED Current (max.):** 6.5mA @ 24 VDC ("ON").

### Installation

FSP-851(A) plug-in detectors use a separate base to simplify installation, service, and maintenance. A special tool allows maintenance personnel to plug in and remove detectors without using a ladder.

Mount base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see DN-60054.

**NOTE:** 1) Because of inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class "B") wiring. 2) When using relay or sounder bases, consult the ISO-X(A) installation

sheet 156-1380 for device limitations between isolator modules and isolator bases.

## Agency Listings and Approvals

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. *Consult factory for latest listing status.*

- **UL Listed:** S1115.
- **ULC Listed:** S1115 (FSP-851A, FSP-851RA, FSP-851TA).
- **MEA Listed:** 225-02-E .
- **FM Approved.**
- **CSFM:** 7272-0028:0206 .
- **Maryland State Fire Marshal:** Permit # 2122 .
- **BSMI:** CI313066760036.
- **CCCF:** Certif. # 2004081801000017 (FSP-851T)  
Certif. # 2004081801000016 (FSP-851).
- **U.S. Coast Guard:** 161.002/42/1 (NFS-640); 161.002/50/0 (NFS2-640/NFS-320/NFS-320C, excluding B210LP(A)).
- **Lloyd's Register:** 11/600013 (NFS2-640/NFS-320/NFS-320C, excluding B210LP(A)).

## Product Line Information

**NOTE:** "A" suffix indicates ULC Listed model.

**FSP-851:** Low-profile intelligent photoelectric sensor. Must be mounted to one of the bases listed below.

**FSP-851A:** Same as FSP-851 but with ULC listing.

**FSP-851T:** Same as FSP-851 but includes a built-in 135°F (57°C) fixed-temperature thermal device.

**FSP-851TA:** Same as FSP-851T but with ULC listing.

**FSP-851R:** Low-profile intelligent photoelectric sensor, remote test capable. For use with DNRA/DNRW.

**FSP-851RA:** Same as FSP-851R but with ULC listing. For use with DNRA.

## INTELLIGENT BASES

**NOTE:** "A" suffix indicates ULC Listed model.

**NOTE:** For details on intelligent bases, see DN-60054.

**B210LP(A):** Standard U.S. flanged low-profile mounting base.

**B210LPBP:** Bulk pack of B210LP; package contains 10.

**B501(A):** Standard European flangeless mounting base.

**B501BP:** Bulk pack of B501; package contains 10.

**B200S(A):** Intelligent, programmable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone.

**B200SR(A):** Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Replaces B501BH series bases in retrofit applications.

**B224RB(A):** Plug-in System Sensor **relay** base. Screw terminals: up to 14 AWG (2.0 mm<sup>2</sup>). Relay type: Form-C. Rating: 2.0 A @ 30 VDC resistive; 0.3 A @ 110 VDC inductive; 1.0 A @ 30 VDC inductive.

**B224BI(A):** Plug-in System Sensor **isolator** detector base. Maximum 25 devices between isolator bases .

## ACCESSORIES

**F110:** Retrofit flange to convert B210LP(A) to match the B710LP(A) profile, or to convert older high-profile bases to low-profile.

**F110BP:** Bulk pack of F110; package contains 15.

**F210:** Replacement flange for B210LP(A) base.

**RA100Z(A):** Remote LED annunciator. 3 – 32 VDC. Mounts to a U.S. single-gang electrical box. For use with B501(A) and B210LP(A) bases only.

**SMB600:** Surface mounting kit

**M02-04-00:** Test magnet.

**M02-09-00:** Test magnet with telescoping handle.

**XR2B:** Detector removal tool. Allows installation and/or removal of detector heads from bases in high ceiling applications.

**XP-4:** Extension pole for XR2B. Comes in three 5-foot (1.524 m) sections.

**T55-127-010:** Detector removal tool without pole.

**BCK-200B:** Black detector covers for use with FSP-851(A) only; box of 10.

**WCK-200B:** White detector covers for use with FSP-851(A) only; box of 10.

-Notifier® and FlashScan® are registered trademarks of Honeywell International Inc.

©2011 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.  
[www.notifier.com](http://www.notifier.com)

# Intelligent Bases

**B501(A), B200S(A), B200SR(A),  
B210LP(A), B2241BI(A), B224RB(A),  
Mounting Kits, and Accessories**



**Intelligent/Addressable Devices**

## General

Intelligent FlashScan® and CLIP mounting bases and kits provide a variety of ways to install NOTIFIER detectors in any application. Intelligent detectors can be mounted in either flanged or flangeless bases depending on junction box selection (see *Junction Box Selection Guide*). Across this product line, detectors plug in easily to the base with SEMS screws; and models employ various 12 to 24 AWG wire ranges.

**Relay, isolator, and sounder bases** can be used to meet local code requirements. Relay bases provide one Form-C contact relay for control of auxiliary functions such as door closure and elevator recall. Isolator bases allow loops to continue to operate under fault conditions and automatically restore when the fault is removed. Sounder bases are available in temporal and non-temporal pattern versions depending on whether the signal is to be used for evacuation purposes.

## Specifications

### Diameter:

- B501: 4.1" (104 mm).
- B224BI, B224RB, B210LP: 6.1" (155 mm).
- B200S/SR/SCOA: 6.875" (17.46 cm).

### Wire gauge:

- B224BI, B224RB: 14 to 24 AWG.
- B210LP, B501, B200S/SR/SCOA: 12 to 24 AWG.

### Temperature range:

- B224BI, B224RB, B200S/SR/SCOA: 32°F to 120°F (0°C to 49°C).
- B210LP, B501: -4°F to 150°F (-20°C to 66°C).

**Humidity range:** 10% to 93% RH, non-condensing.

**System temperature and humidity ranges:** This system meets NFPA requirements for operation at 0°C to 49°C (32°F to 120°F); and at a relative humidity (noncondensing) of 85% at 30°C (86°F) per NFPA, and 93% ± 2% at 32°C ± 2°C (89.6°F ± 1.1°F) per ULC. However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and all peripherals be installed in an environment with a nominal room temperature of 15°C to 27°C (60°F to 80°F).

## Electrical Ratings

### FOR B200S/SR/SCOA:

**External supply voltage:** 16 to 33 VDC (VFWR)

**Standby current:** 500 µA maximum.

### Alarm current:

- B200S: 35 mA maximum at high-volume setting; 15 mA maximum at low-volume setting.
- B200SR: 35 mA maximum.
- B200SCOA: 40mA Max. (DC), 70mA Max. (FWR)

**SLC operating voltage:** 15 to 32 VDC.

**SLC standby current:** 300 µA.

**Sound output:**



**Flangeless Mounting Base  
B501(A)**



**Flanged Mounting Base  
B210LP(A)**



**Sounder Base  
B200S(A), B200SR(A),  
B200SCOA**



**Relay Base  
B224RB(A)**

- B200S, high-volume\*: Greater than 85 dBA minimum.
- B200S, low-volume\*: Greater than 75 dBA minimum.
- B200SR\*: Greater than 85 dBA minimum.
- B200SCOA, high-volume\*\*: Greater than 87 dBA minimum.
- B200SCOA, low-volume\*\*: Greater than 85 dBA minimum

\*Measured in a UL reverberant room at 10 feet, 24 Volts (continuous tone)

\*\*Measured in a ULC anechoic room at 10 feet, 24 Volts continuous tone)

### FOR B224RB, B224BI:

**Operating voltage:** 15 to 32 VDC (powered by SLC).

**Standby ratings:** <500 µA maximum @ 24 VDC.

**Set time (B224RB only):** short delay 55 to 90 msec; long delay 6 to 9 seconds.

**Reset time (B224RB only):** 20 msec maximum.

**Relay characteristics (B224RB only):** two-coil latching relay; one Form-C contact; ratings (UL/CSA): 0.9 A @ 125 VAC, 0.9 A @ 110 VDC, and 3.0 A @ 30 VDC.

## Product Line Information

### INTELLIGENT BASES

**B501:** Flangeless mounting base.

**B501A:** Flangeless mounting base, ULC Listed.

**B501BP:** Bulk pack of B501 (10).

**B210LP:** Flanged mounting base.

**B210LPA:** Flanged mounting base, ULC listed

**B210LPBP:** Bulk pack of B210LP (10).

**B200S:** Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. Only compatible with the NFS-320, NFS2-640 and NFS2-3030 operating version with version 15.0 or higher panel firmware.

**B200SA:** Same as B200S with ULC-listing.

**B200SCOA:** Same as B200S with ULC-listing and CO detector markings in English/French (required in Canada for ULC applications with FCO-851A).

**B200SR:** Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone.

**B200SRA:** Same as B200SR with ULC-listing.

**B224RB:** Relay base.

**B224RBA:** Relay base, ULC Listed.

**B224BI:** Isolator base.

**B224BIA:** Isolator base, ULC Listed.

### MOUNTING KITS AND ACCESSORIES

**SMB600:** Surface mounting kit, flanged.

**F110:** Retrofit flange for converting high-profile bases to low-profile.

**F110BP:** Bulk pack of F110 (10).

**F210:** Accessory flange ring for B210LP(A) base (new design). 6-inch diameter.

**F210BP:** Bulk pack of F210 (10).

**RA100Z:** Remote LED annunciator.

**RA100ZA:** Remote LED annunciator, ULC Listed.

**M02-04-00:** Detector test magnet.

**M02-09-00:** Test magnet with telescoping handle.

**XR2B:** Detector removal tool for current heads (T55-127-010 included).

**XR2:** Detector Remove Tool for use with low profile detector heads, and FSL-751.

**XP-4:** Extension pole for XR2/B (5 to 15 ft/1.524 to 4.572 m).

**T55-127-010:** Detector removal head.

**BCK-200B:** Black detector kit, package of 10 (for use with photo and ion detectors).

**WCK-200B:** White detector kit, package of 10 (for use with photo and ion detectors).

### Agency Listings and Approvals

The listings and approvals below apply to intelligent bases as noted. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Listed:** S911
- **ULC Listed:** S911
- **FM Approved**
- **MEA:** 22-95-E, 205-94-E Vol. 2; 257-06-E
- **CSFM:** 7300-1653:0126, 7135-1653:0213, 7300-1653:0109

### Junction Box Selection Guide

Base Models	Single Gang	3.5" Oct.	4.0" Oct.	4.0" Sq.	4.0" Sq. with 3.0" mud ring	50 mm	60 mm	70 mm	75 mm
B200S, B200SR, B200SCOA	Yes	Yes	Yes	Yes	Yes	No	No	No	No
B501	No	Yes	No	No	Yes	Yes	Yes	Yes	No
B210LP	Yes	Yes	Yes	Yes	Yes	No	No	No	No
B224RB	No	Yes	Yes	Yes	No	No	Yes	Yes	Yes
B224BI	No	Yes	Yes	Yes	No	No	No	Yes	Yes

**NOTE:** Box depth contingent on base and wire size.  
Refer to National Electric Code or applicable local codes for appropriate recommendations.

FlashScan®, NOTIFIER® and System Sensor® are registered trademarks of Honeywell International Inc.  
©2013 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.  
www.notifier.com

# NBG-12LX

## Addressable Manual Pull Station



Intelligent/Addressable Devices

### General

The Notifier NBG-12LX is a state-of-the-art, dual-action (i.e., requires two motions to activate the station) pull station that includes an addressable interface for any Notifier intelligent control panel except FireWarden series panels, and the NSP-25 panel. Because the NBG-12LX is addressable, the control panel can display the exact location of the activated manual station. This leads fire personnel quickly to the location of the alarm.

### Features

- Maintenance personnel can open station for inspection and address setting without causing an alarm condition.
- Built-in bicolor LED, which is visible through the handle of the station, flashes in normal operation and latches steady red when in alarm.
- Handle latches in down position and the word “ACTIVATED” appears to clearly indicate the station has been operated.
- Captive screw terminals wire-ready for easy connection to SLC loop (accepts up to 12 AWG/3.25 mm<sup>2</sup> wire).
- Can be surface mounted (with SB-10 or SB-I/O) or semi-flush mounted. Semi-flush mount to a standard single-gang, double-gang, or 4" (10.16 cm) square electrical box.
- Smooth dual-action design.
- Meets ADAAG controls and operating mechanisms guidelines (Section 4.1.3[13]); meets ADA requirement for 5 lb. maximum activation force.
- Highly visible.
- Attractive shape and textured finish.
- Key reset.
- Includes Braille text on station handle.
- Optional trim ring (BG12TR).
- Meets UL 38, Standard for Manually Actuated Signaling Boxes.
- Up to 99 NBG-12LX stations per loop on CLIP protocol loops.
- Up to 159 NBG-12LX stations per loop on FlashScan® protocol loops.
- Dual-color LED blinks green to indicate normal on FlashScan® systems.

### Construction

Shell, door, and handle are molded of durable polycarbonate material with a textured finish.

### Specifications

- **Shipping Weight:** 9.6 oz. (272.15 g)
- **Normal operating voltage:** 24 VDC.
- **Maximum SLC loop voltage:** 28.0 VDC.
- **Maximum SLC standby current:** 375 µA.
- **Maximum SLC alarm current:** 5 mA.
- **Temperature Range:** 32°F to 120°F (0°C to 49°C)
- **Relative Humidity:** 10% to 93% (noncondensing)
- **For use indoors in a dry location**



The NBG-12LX  
Addressable Manual Pull Station

### Installation

The NBG-12LX will mount semi-flush into a single-gang, double-gang, or standard 4" (10.16 cm) square electrical outlet box, or will surface mount to the model SB-10 or SB-I/O surface backbox. If the NBG-12LX is being semi-flush mounted, then the optional trim ring (BG12TR) may be used. The BG12TR is usually needed for semi-flush mounting with 4" (10.16 cm) or double-gang boxes (not with single-gang boxes).

### Operation

Pushing in, then pulling down on the handle causes it to latch in the down/activated position. Once latched, the word “ACTIVATED” (in bright yellow) appears at the top of the handle, while a portion of the handle protrudes from the bottom of the station. To reset the station, simply unlock the station with the key and pull the door open. This action resets the handle; closing the door automatically resets the switch.

Each manual station, on command from the control panel, sends data to the panel representing the state of the manual switch. Two rotary decimal switches allow address settings (1 – 159 on FlashScan® systems, 1 – 99 on CLIP systems).

### Architectural/Engineering Specifications

Manual Fire Alarm Stations shall be non-coded, with a key-operated reset lock in order that they may be tested, and so designed that after actual Emergency Operation, they cannot be restored to normal except by use of a key. An operated station shall automatically condition itself so as to be visually detected as activated. Manual stations shall be constructed of red-colored polycarbonate material with clearly visible operating instructions provided on the cover. The word FIRE shall appear on the front of the stations in white letters, 1.00 inches (2.54 cm) or larger. Stations shall be suitable for surface mounting on matching backbox SB-10 or SB-I/O; or semi-flush mounting on a standard single-gang, double-gang, or

4" (10.16 cm) square electrical box, and shall be installed within the limits defined by the Americans with Disabilities Act (ADA) or per national/local requirements. Manual Stations shall be Underwriters Laboratories listed.

Manual stations shall connect with two wires to one of the control panel SLC loops. The manual station shall, on command from the control panel, send data to the panel representing the state of the manual switch. Manual stations shall provide address setting by use of rotary decimal switches.

The loop poll LED shall be clearly visible through the front of the station. The LED shall flash while in the normal condition, and stay steadily illuminated when in alarm.

## Product Line Information

**NBG-12LX:** Dual-action addressable pull station. Includes key locking feature. (Listed for Canadian and non-Canadian applications.)

**NBG-12LXSP:** Spanish/English labelled version.

**NBG-12LXP:** Portuguese labelled version.

**SB-10:** Surface backbox; metal.

**SB-I/O:** Surface backbox; plastic.

**BG12TR:** Optional trim ring.

**17021:** Keys, set of two.

**NY-Plate:** New York City trim plate.

## Agency Listings and Approvals

In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL/ULC Listed:** S692 (listed for Canadian and non-Canadian applications).
- **MEA:** 67-02-E.
- **CSFM:** 7150-0028:0199.
- **FDNY:** COA #6085 (NFS2-640), COA #6098 (NFS2-3030).
- **BSMI:** CI313066760047.
- **U.S. Coast Guard.**
- **Lloyd's Register.**
- **FM Approved.**

**Patented:** U.S. Patent No. D428,351; 6,380,846; 6,314,772; 6,632,108.

NOTIFIER® and FlashScan® are registered trademarks of Honeywell International Inc.

©2012 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.  
[www.notifier.com](http://www.notifier.com)

# Wheelock E Series

## Low-Profile Public Speakers and Speaker Strobes



Audio / Visual Devices

### General

Wheelock Series E Low Profile Speakers and Speaker Strobes are designed for high efficiency sound output, with dual voltage (25/70 VRMS) capability and field selectable taps from 1/8 to 2 watts. The low profile design incorporates a speaker mounting plate for faster and easier installation. Each model has a built-in level adjustment feature and an aesthetic two (2) screw grille cover.

The Series E Speaker Strobe models incorporate the low current draw series RSS strobes.

Strobe options for wall mount models include 1575 or Wheelock's patented MCW multi-candela strobe with field selectable candela settings of 15/30/75/110cd or the high intensity MCWH strobe with field selectable 135/185cd.

Ceiling mount models are available in Wheelock's patented MCC multi-candela ceiling strobe with field selectable intensities of 15/30/75/95cd or the high intensity MCCH strobe with field selectable 115/177cd.

Series E Speakers and Speaker Strobes provide high audio output with clear audibility and are designed to meet the critical needs of the life safety industry for effective emergency voice communications, tone signaling and visible signaling to alert the hearing impaired.

The strobe portion of all Series E Speaker Strobes may be synchronized when used in conjunction with the Wheelock SM, DSM Sync Modules or a power supply with patented Wheelock sync protocol. Wheelock's synchronized strobes offer an easy way to comply with ADA recommendations concerning photo-sensitive epilepsy.

Series E Speaker Strobes are UL Listed for indoor use under Standard 1971 (Signaling Devices for the Hearing-Impaired) and Standard 1480 (Speaker Appliances), and use a Xenon flashtube with solid state circuitry enclosed in a rugged Lexan® lens to provide maximum reliability for effective visual signaling. All inputs are supervised and employ IN/OUT wiring terminals for fast installation using #12 to #18 AWG wiring.

Color options for the E Series Speakers and Speaker Strobes offered are colored red or white.

### Features

- ADA/NFPA/ANSI compliant
- Complies with OSHA 29 Part 1910.165
- Wall mount models are available with field selectable candela settings of 15/30/75/110cd or 135/185cd (multi-candela models), or 1575cd (single candela model)
- Ceiling mount models are available with field selectable candela settings of 15/30/75/95cd or 115/177cd (multi-candela models)
- Strobes produce 1 flash per second over the regulated voltage range
- 24 VDC with wide UL "Regulated Voltage" using filtered DC or unfiltered VRMS input voltage
- Synchronize with Wheelock SM, DSM or panels with built-in Wheelock patented synch protocol
- Field selectable taps for 25 or 70 VRMS operation from 1/8 watt up to 2 watts
- High efficiency design for maximum output at minimum wattage across a frequency range of 400 to 4000 HZ



E70 Series Speaker Strobe

E90 Series Speaker Strobe



Multi-Candela Indicator(bottom of Strobe Lens)

- Fast installation with IN/OUT screw terminals using #12 to #18 AWG wires

### General Notes

- Strobes are designed to flash at 1 flash per second minimum over their "Regulated Voltage Range". Note that NFPA-72 specifies a flash rate of 1 to 2 flashes per second and ADA Guidelines specify a flash rate of 1 to 3 flashes per second.
- All candela ratings represent minimum effective Strobe intensity based on UL Standard 1971.
- Series E Speaker Strobes and Series E Speakers are listed under UL Standard 1971 for indoor use with a temperature range of 32°F to 120°F (0°C to 49°C) and maximum humidity of 85%.
- "Regulated Voltage Range" is the newest terminology used by UL to identify the voltage range. Prior to this change UL used the terminology "Listed Voltage Range".

**NOTE:** Please read these specifications and associated installation instructions carefully before using, specifying or applying this product. Failure to comply with any of these instructions, cautions or warnings could result in improper application, installation and/or operation of these products in an emergency situation, which could result in property damage, and serious injury or death to you and/or others.

## Specifications and Ordering Information

MODEL	STROBE CANDELA	MODEL COLOR	WALL/CEILING MOUNT	AGENCY APPROVALS				
				UL	MEA	CSFM	FM	BFP
E70-24MCW-FR	15/30/75/110	Red	Wall	X	X	X	*	X
E70-24MCW-FW	15/30/75/110	White	Wall	X	X	X	*	X
E70-241575W-FR	15 (75 on Axis)	Red	Wall	X	X	X	*	X
E70-R	-	Red	Wall/Ceiling	X	X	X	*	X
E70-W	-	White	Wall/Ceiling	X	X	X	*	X
E70-24MCWH-FR	135/185	Red	Wall	X	*	*	*	*
E70-24MCWH-FW	135/185	White	Wall	X	*	*	*	*
E90-24MCC-FW	15/30/75/95	White	Ceiling	X	*	X	*	*
E90-W	-	White	Wall/Ceiling	X	X	X	*	X
E90-R	-	Red	Wall/Ceiling	X	X	X	*	X
E90-24MCCH-FW	115/177	White	Ceiling	X	*	*	*	*

E70/E90 Speaker Strobes	E-70 Strobe Current - Wall Mount							E90 Strobe Current - Ceiling Mount					
	241575W		24MCW			24MCWH		24MCC				24MCCH	
	1575cd	15cd	30cd	75cd	110cd	135cd	185cd	15cd	30cd	75cd	95cd	115cd	177cd
16-33 VDC	0.090	0.060	0.092	0.165	0.220	0.300	0.420	0.065	0.105	0.189	0.249	0.300	0.420

### UL Max Current\*

\*UL max current rating is the maximum RMS current within the listed voltage range (16-33v for 24v units). For strobes the UL max current is usually at the minimum listed voltage (16v for 24v units). For audibles the max current is usually at the maximum listed voltage (33v for 24v units). For unfiltered FWR ratings, see installation instructions.

watts	1/8	1/4	1/2	1	2
E Speaker	77	81	83	86	89
E Speaker Strobe	76	80	82	85	88

### E70/E90 UL Reverberant dBA @ 10 Feet \*\*

\*\*dBA ratings are based on testing under UL Standard 1480

## Architect and Engineer Specifications

The speaker appliances shall be Wheelock Series E Speakers and the speaker strobe appliances shall be Wheelock Series E Speaker Strobes or approved equals. The speakers shall be UL Listed under Standard 1480 for Fire Protective Service and speakers equipped with strobes shall be listed under UL Standard 1971 for Emergency Devices for the Hearing-Impaired. In addition, the strobes shall be certified to meet the requirements of FCC Part 15, Class B.

All speakers shall be designed for a field selectable input of either 25 or 70 VRMS, with selectable power taps from 1/8 watt to 2 watts. All models shall have listed sound output of up to 87 dB at 10 feet and a listed frequency response of 400 to 4000 Hz. The speaker shall also incorporate a sealed back construction. All inputs shall employ terminals that accept #12 to #18 AWG wire sizes. The strobe portion of the appliance shall produce a flash rate of one (1) flash per second over the Regulated Voltage Range and shall incorporate a Xenon flashtube enclosed in a rugged Lexan® lens. The strobe shall be of low current design. Where Multi-Candela Speaker Strobes are specified, the strobe intensity shall have field selectable settings and shall be rated per UL Standard 1971 at 15/30/75/110cd or 135/185cd for wall mount and 15/30/75/95cd or 115/177cd for ceiling mount. The selector switch for selecting the candela shall be tamper resistant. The 1575 candela strobe shall be specified when 15 candela UL Standard 1971 Listing with 75 candela on-axis is required (e.g. ADA compliance). When synchronization is required, the strobe portion of the appliance shall be compatible with Wheelock's SM, DSM sync modules or the power supply with built-in Patented Wheelock Sync Protocol. The strobes shall not drift out of synchronization at any time during operation. If the sync module or Power Supply fails to operate, (i.e., contacts remain closed), the strobe shall revert to a non-synchronized flash rate.

The speaker and speaker strobe appliances shall be designed for indoor surface or flush mounting. The speaker and speaker strobe shall incorporate a speaker mounting plate with a grille cover which is secured with two screws for a level, aesthetic finish and shall mount to standard electrical hardware requiring no additional trimplate or adapter.

The finish of the Series E speakers and strobe speakers shall be white, red, or nickel plate.

All speaker and speaker strobe appliances shall be backward compatible.

Wheelock products must be used within their published specifications and must be PROPERLY specified, applied, installed, operated, maintained and operationally tested in accordance with their installation instructions at the time of installation and at least twice a year or more often and in accordance with local, state and federal codes, regulations and laws. Specification, application, installation, operation, maintenance and testing must be performed by qualified personnel for proper operation in accordance with all of the latest National Fire Protection Association (NFPA), Underwriters' Laboratories (UL), National Electrical Code (NEC), Occupational Safety and Health Administration (OSHA), local, state, county, province, district, federal and other applicable building and fire standards, guidelines, regulations, laws and codes including, but not limited to, all appendices and amendments and the requirements of the local authority having jurisdiction (AHJ).

### Warning:

- Current required by all appliances connected to system secondary power sources.
- Fuse ratings on notification appliance circuits to handle peak currents from all appliances on those circuits.
- Composite flash rate from multiple strobes within a person's field of view.

- Adding, replacing or changing appliances or changing candela settings will affect current draw.
- Recalculate current draw to insure that the total average current and total peak required by all appliances do not exceed the rated capacity of the power sources or fuses.
- The voltage applied to these products must be within their "regulated voltage range".
- Installation of 110 candela strobe products in sleeping areas.
- Installation in office areas and other specification and installation issues.
- Use strobes only on circuits with continuously applied operating voltage. Do not use strobes on coded or interrupted circuits in which the applied voltage is cycled on and off as the strobes may not flash.
- Failure to comply with the installation instructions or general information sheets could result in improper installation, application, and/or operation of these products in an emergency situation, which could result in property damage and serious injury or death to you and/or others.
- Conductor size (awg), length and ampacity should be taken into consideration prior to design and installation of these products, particularly in retrofit installations.

## Agency Listings and Approvals

- UL Listed: S2652 (Speakers); S2652 / S5391 (Strobe/Speakers)
- California State Fire Marshall: 7320-0785:134 (Speakers); 7125-0785:145 , 7125-0785:152 (Strob/Speakers)
- MEA: 151-92-E Vol. 21

FlashScan® is a registered trademark of Honeywell International Inc. Bayblend® is a registered trademark of Bayer Corporation.  
©2009 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



# Wheelock® Exceder™

## Horns and Strobes



### Audio/Visual Devices

#### General

The Wheelock® Exceder™ Series of notification appliances feature a sleek modern design and numerous features including eight candela options in one appliance, low current draw, no tools needed for setting changes, 12/24 VDC operation, universal mounting base and multiple mounting options.

Models with an audible feature 3 sound settings (90, 95, 99 dB). All switches to change settings can be set without the use of a tool and are located behind the appliance to prevent tampering. Wall models feature voltage test points to take readings with a voltage meter for troubleshooting and AHJ inspection.

The Wheelock® Exceder™ Series of wall and ceiling notification appliances feature a Universal Mounting Base (UMB) designed to simplify the installation and testing of horns, strobes, and combination horn strobes. The separate universal mounting base can be pre-wired to allow full testing of circuit wiring before the appliance is installed and the surface is finished. It comes complete with a contact cover for protection against dirt, dust, paint and damage to the contacts. The contact cover also acts as a shunting device to allow pre-wire testing for common wiring issues.

The contact cover is polarized to prevent it from being installed incorrectly and prevents the appliance from being installed while it is on the UMB. When the contact cover is removed the circuit will show an open until the appliance is installed. The UMB allows for consistent installation and easy replacement of appliances if required. Wall models provide an optional locking screw for extra secure installation, while the ceiling models provide a captive screw to prevent the screw from falling during installation.

#### Features

- Multiple voltages
- Voltage test points for quick troubleshooting and easy spot-checking (wall models only)
- 3 audible settings (90, 95, 99 dB)
- 8 Candela settings
  - Wall - 15/1575/30/75/95/110/135/185
  - Ceiling - 15, 30, 60, 75, 95, 115, 150, 177
- Finger-slide switches
- Sleek modern aesthetics
- Common base for wall and ceiling with 5 mounting options:
  - 1-gang
  - 2-gang
  - 4 inch square
  - 3.5 inch octagonal
  - 4 inch octagonal

#### Compatibility and Requirements

- Synchronize using Wheelock Sync Modules, or panels with built-in Wheelock patented sync protocol.
- Compatible with UL “Regulated Voltage” using filtered VDC or unfiltered VRMS input voltage
- Strobes produce one flash per second over the Regulated Voltage range.



Wall



Ceiling



#### General Notes

- All candela ratings represent minimum effective strobe intensity based on UL Standard 1971.
- Series Exceder Strobe products are Listed under UL Standards 1971 and 464 for indoor use with a temperature range of 32°F to 120°F (0°C to 49°C) and maximum humidity of 93% (± 2%) UL 464 (85% UL 1971).
- Series Exceder horns are under UL Standard 464 for audible signal appliances (Indoor use only).
- Product naming conventions: The Exceder line's model codes break down into easy-to-remember codes. HN = Horn, ST = Strobe, HS = Horn-strobe, C = Ceiling Mount, W = White, and R = Red. So “STRC” can be read as “Strobe, Red, Ceiling-mount.”, and “HSW” is “Horn-strobe, white, wall-mount.”
- Refer to your fire alarm panel or power supply manual when calculating the number of devices allowed per circuit.

#### Architects/Engineers Specifications

The notification appliances shall be Wheelock Exceder Series HS Audible Strobe appliances, Series ST Visual Strobe appliances and Series HN Audible appliances or approved equals. The Series HS and ST Strobes shall be listed for UL Standard 1971 (Emergency Devices for the Hearing-Impaired) for Indoor Fire Protection Service. The Series HS and HN Audibles shall be UL Listed under Standard 464 (Fire Protective Signaling). All Series shall meet the requirements of FCC Part 15 Class B. All inputs shall be compatible with standard reverse polarity supervision of circuit wiring by a Fire Alarm Control Panel (FACP) with the ability to operate from 8 to 33 VDC. Indoor wall models shall incorporate voltage test points for easy voltage inspection.

The Series HS Audible Strobe and ST Strobe appliances shall produce a flash rate of one flash per second over the Regulated Voltage Range and shall incorporate a Xenon flashtube enclosed in a rugged Lexan® lens. The Series shall be of low current design. Where Multi-Candela appliances are specified, the strobe intensity shall have 8 field selectable settings at 15,

15/75, 30, 75, 95, 110, 135, 185 candela for wall mount and 15, 30, 60, 75, 95, 115, 150, 177 candela for ceiling mount. The selector switch for selecting the candela shall be tamper resistant. The 15/75 candela strobe shall be specified when 15 candela UL Standard 1971 Listing with 75 candela on-axis is required (e.g. ADA compliance). Appliances with candela settings shall show the candela selection in a visible location at all times when installed.

The audible shall have a minimum of three field selectable settings for dBA levels and shall have a choice of continuous or temporal (Code 3) audible outputs.

### MOUNTING OPTIONS

The Series HS Audible Strobe, ST Strobe and Series HN Audible shall incorporate a patented Universal Mounting Base that shall allow mounting to a single-gang, double-gang, 4" square, 3.5" octagonal, 4" octagonal or 100mm European type back boxes. Two wire appliance wiring shall be capable of directly connecting to the mounting base. Continuity checking of the entire NAC circuit prior to attaching any notification appliances shall be allowed. Product shall come with contact cover to protect contact springs. Removal of an appliance shall result in a supervision fault condition by the Fire Alarm Control Panel (FACP). The mounting base shall be the same base among all horn, strobe, horn strobe, wall and ceiling models. All notification appliances shall be backwards compatible.

### PHYSICAL SPECIFICATIONS

The Series HS and ST wall models shall have a low profile measuring 5.24" H x 4.58" W x 2.19" D. Series HN wall shall measure 5.24" H x 4.58" W x 1.6" D. The Series HSC and STC

shall be round and have a low profile with a diameter of 6.68" x 2.63" D. Series HNC ceiling shall have a diameter of 6.68" x 1.50" D.

### SYNCHRONIZATION

When synchronization is required, the appliance shall be compatible with Wheelock® SM, DSM Sync Modules, Wheelock® Power Supplies or other manufacturer's panels with built-in Wheelock® Patented Sync Protocol. The strobes shall not drift out of synchronization at any time during operation. If the sync protocol fails to operate, the strobe shall revert to a non-synchronized flash-rate and still maintain one flash per second over its Regulated Voltage Range. The appliance shall also be designed so that the audible signal may be silenced while maintaining strobe activation when used with Wheelock® synchronization protocol.

### Standards and Codes

Modules in this series comply with UL Standard 1971, UL Standard 464, California State Fire Marshal (CSFM), and ULC.

### Agency Listings

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Listed:** S5391 (Strobes); E5946 (Horns, Horn/strobes).
- **ULC Listed**
- **CSFM Listed:** 7125-0785:168.

## Specification & Ordering Information

Model	Strobe Candela	12/24 VDC	Mounting Options
<b>Horn Strobes</b>			
HSR	15, 15/75, 30, 75, 95, 110, 135, 185	X	Universal Mounting Base
HSW	15, 15/75, 30, 75, 95, 110, 135, 185	X	Universal Mounting Base
HSRC	15, 30, 60, 75, 95, 115, 150, 177	X	Universal Mounting Base
HSWC	15, 30, 60, 75, 95, 115, 150, 177	X	Universal Mounting Base
<b>Strobes</b>			
STR	15, 15/75, 30, 75, 95, 110, 135, 185	X	Universal Mounting Base
STW	15, 15/75, 30, 75, 95, 110, 135, 185	X	Universal Mounting Base
STRC	15, 30, 60, 75, 95, 115, 150, 177	X	Universal Mounting Base
STWC	15, 30, 60, 75, 95, 115, 150, 177	X	Universal Mounting Base
<b>Horns</b>			
HNR	—	X	Universal Mounting Base
HNW	—	X	Universal Mounting Base
HNRC	—	X	Universal Mounting Base
HNWC	—	X	Universal Mounting Base
*12 VDC models feature 15 and 15/75 settings			
<b>NOTE:</b> Due to continuous development of Cooper Wheelock products, specifications and offerings are subject to change without notice in accordance with Cooper Wheelock Inc., dba Cooper Notification standard terms and conditions.			

Notifier® is a registered trademark of Honeywell International Inc.  
 Exceder is a trademark and Wheelock® is a registered trademark of Cooper Notification.  
 ©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

This document is not intended to be used for installation purposes.  
 We try to keep our product information up-to-date and accurate.  
 We cannot cover all specific applications or anticipate all requirements.  
 All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.  
[www.notifier.com](http://www.notifier.com)