

HEADER FRAMING PLAN

HEADERS SUPPORTING LEVEL 3	R.O. SPAN	HEADER TO USE:
L < 3'-6"		DBL 2x8 HDR
3'-6" < L < 6'-6"		TRIPLE 2x10 HDR
L > 6'-6"		SEE PLAN

HEADERS SUPPORTING LEVEL 4	R.O. SPAN	HEADER TO USE:
L < 3'-6"		DBL 2x8 HDR
3'-6" < L < 6'-6"		TRIPLE 2x10 HDR
L > 6'-6"		SEE PLAN

HEADERS SUPPORTING ROOF	R.O. SPAN	HEADER TO USE:
L < 3'-6"		DBL 2x8 HDR
3'-6" < L < 6'-6"		TRIPLE 2x10 HDR
L > 6'-6"		SEE PLAN

* UNLESS NOTED ON PLAN

FRAMING PLAN SYMBOLS KEY

□	WOOD POST
○	STEEL COLUMN
⊗	NUMBER OF WOOD STUDS IN POST BELOW
A	COLUMN ABOVE THIS LEVEL
C	COLUMN CONTINUOUS THROUGH THIS LEVEL
←	JOIST BEARING
—	CONTINUOUS JOIST WITH INTERMEDIATE BEARING
—	FLUSH FRAMED JOIST BEARING WITH HANGER
—	WOOD STUD BEARING WALL BELOW
—	SHEAR WALL
⊕	NUMBER OF TRIM STUDS UNDER HEADER
⊗	NUMBER OF KING STUDS ADJACENT TO HEADER

LEGEND

---	DROPPED BEAM
---	FLUSH BEAM

LAYOUT ROOF-TRUSSES TO AVOID CONFLICTS WITH DRAINAGE AND MEP SHAFTS


ROOF FRAMING PLAN

- NOTES:
- SEE SHEET S1.0 FOR GENERAL STRUCTURAL NOTES
 - ROOF SHEATHING SHALL BE 5/8 SHEATHING. SEE GEN NOTES FOR MORE INFO.
 - ALL WOOD COLUMNS IN 2x6 WALLS SHALL BE (3) 2x6 AND IN 2x4 WALLS SHALL BE (3) 2x4 UNO
 - ALL HEADERS ARE DROPPED UNO.
 - ALL BEAMS ARE FLUSH UNO.
 - ALL WINDOW HEADERS ARE PER SCHEDULE ON THIS SHEET

HATCH INDICATES OVER-FRAMING OR TAPERED INSULATION AS NEEDED FOR ROOF PITCH

FALL PROTECTION ROOF ANCHOR PER ARCH.

5 1/2" LVL LET INTO STUDS BELOW TOP PLATES. TOP PLATES TO RUN CONT. OVER NOTCHED STUDS AND LVL. (2) 1/4"x3 1/2" SDS SCREWS INTO EA. STUD. LVL TO EXTEND MIN. 8'-0" INTO WALL, END ON STUD.

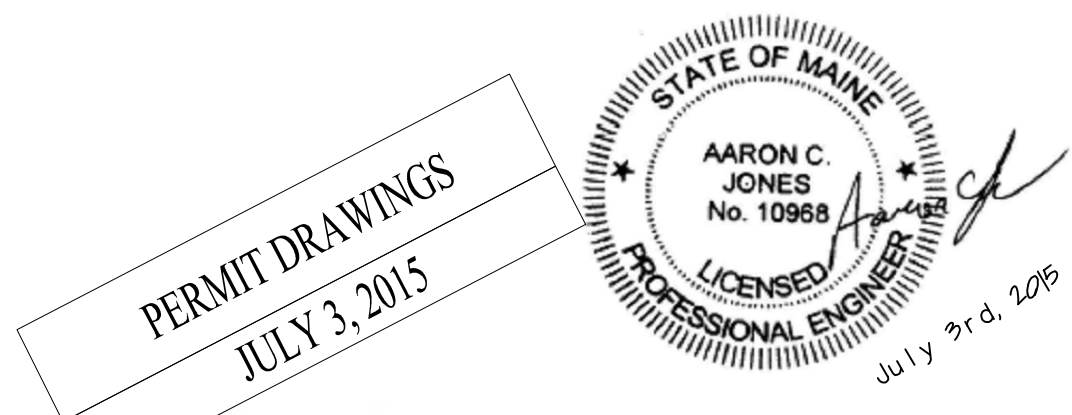

Structural Integrity
Consulting Engineers, Inc.
77 Oak Street
Portland, ME, 04101
p. 207-774-4614
f. 866-793-7835
www.structuralinteg.com

SI # 14-0210

BUILD WITH CONFIDENCE
© 2012 Structural Integrity Consulting Engineers, Inc.