


 Permitting and Inspections Department
 Michael A. Russell, MS, Director

Fire Alarm Permit Application

Construction Address: 65 MILLIKEN STREET PORTLAND MAINE UNIT B NOVA ANALYTIC LABS		
Total Square Footage of Proposed Structure: 3,456		
Tax Assessor's Chart, Block & Lot		Applicant Name: PROTECTION PROFESSIONALS
Chart#	Block#	Lot#
333	K125	001
Cost of Work: \$ 3183.54		Address: 325 US ROUTE ONE, FALMOUTH MAINE 04105
		Phone: 207-775-5755
		Email: JEREMY@PROTECTIONPROFESSIONALS.NET
Lessee/Owner Name (if different):		Contractor Name (if different):
GREG NEWLAND		AAA ENERGY SERVICES
Address: 65 MILLIKEN STREET UNIT B PORTLAND MAINE		Address: 4 COMMERCIAL STREET SCARBOROUGH MAINE 04070
Phone: 610-217-5549		Phone: 207-883-1473
Email: GREG@NOVA-ANALYTICLABS.COM		Email: RBOUTIN@AAAENERGY.COM
Current use (i.e. single family): VACANT		
If vacant, what was the previous use? OFFICE		
Proposed specific use: CANNABIS TESTING AND PROCESSING		
Is property part of a subdivision? If yes, name: NA		
Project description: ADDITION TO AN EXISTING ADDRESSABLE FIRE ALARM SYSTEM		
Life Safety Code Occupancy Classification: MERCANTILE		
Is this new work or a renovation to an existing system? NEW WORK		
Is the top occupiable floor of the building greater than 75 feet above the lowest level of Fire Department access (high-rise)? NA		
Name of company providing programming and certification of system*: PROTECTION PROFESSIONALS		
Electrical permit #: ELEC2019-02162		
Will a master box be installed? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> If yes, complete all items for approval):		
AES approved installing contractor: PROTECTION PROFESSIONALS		
Documentation of AES approval: NA		
Property Owner: NA		
Property Owner Billing Address: NA		
Property common name: NA		
E-911 address for protected premises: NA		
Emergency contact phone: NA		Additional emergency contact phone: NA
Number of stories protected: NA		
Is the building protected by a supervised, automatic sprinkler system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
Name of person to contact when the permit is ready: JEREMY LAMBERT		
Address: 325 US ROUTE ONE,		
City, State & Zip: FALMOUTH MAINE 04105		
Email Address: JEREMY@PROTECTIONPROFESSIONALS.NET		Phone: 207-775-5755

*For a list of approved fire alarm companies, see www.portlandmaine.gov/1486/Approved-Fire-Alarm-Companies

389 Congress Street, Room 315/Portland Maine 04101/www.portlandmaine.gov/tel: 207-874-8703/fax: 207-874-8716



Normal Standby	The green AC POWER LED will be illuminated and the user defined message on the LCD will be displayed. If the AC power is removed for more than 5 seconds, the green AC power LED will extinguish.
Acknowledging	Off normal events are acknowledged by pressing the ACK key while reviewing events. After all events have been acknowledged, the buzzer will deactivate and the associated LED will stop flashing and remain on continuously. During Positive Alarm Sequence operation the “ACK” key must be pressed within 15 seconds of the alarm initiation to activate the investigation timer.
Alarm Condition	The red ALARM LED will be illuminated anytime an alarm is occurring in the system. The LCD will display the number of inputs in alarm, and the buzzer will be activated. The buzzer will remain active until all alarms have been acknowledged, or until the Silence key is pressed.
Silencing Alarm	When the system is in Alarm, the notification circuits (strobes and horns) can be shut off by pushing the SILENCE button.
Resetting Alarm	After the condition that caused the alarm has been identified and corrected, the system may be reset to the Normal Standby by pressing the RESET button.
Supervisory Condition	When a supervisory condition is detected, the amber SUPERVISORY LED will illuminate and the buzzer will sound. The LCD display will indicate the number of supervisory events that are active. The local buzzer will sound until all supervisory events have been acknowledged.
Restoring Supervisory Condition	If the Supervisory condition is non-latching, once the device is restored to the normal condition, the supervisory event will clear. If the supervisory condition is latching, the device that was activated must be restored and the RESET pressed.
Trouble Condition	When a fault condition occurs, the amber TROUBLE LED will illuminate and the local buzzer will sound until the fault is removed or the ACK button is pressed acknowledging the trouble condition. If the buzzer is acknowledged and the fault is not removed within 24 hours, the buzzer will resound.
Silencing Trouble(s)	When a trouble is occurring, the local buzzer will sound until either all troubles have been acknowledged or the SILENCE button is pressed.
Ground Fault	When a conductor contacts and earth ground, the amber EARTH FAULT LED will illuminate and the LCD display will provide further information of where the fault is located.
Pre-Release (Releasing Panels Only)	The amber Pre-Release LED will illuminate when the system is in a count down timer for an agent release. Additionally, pre-release events and countdown timers are displayed on the LCD.
Release (Releasing Panels Only)	The red Release LED will illuminate when a release condition is active. Additionally, release events will be displayed on the LCD.
Agent Release Abort (Releasing Panels Only)	If the system is being used as an agent releasing panel and a pre-discharge timer is programmed, the release may be aborted by pressing the abort switch. For ULI installations, pushing the Abort will allow the timer to countdown until 10 seconds and then halt. Releasing and reactivating the Abort will set the timer to 10 seconds.
Testing and Maintenance	Test this system monthly or more frequently as required by the AHJ. Before conducting any testing contact the building personnel and the monitoring facility as applicable. When testing a system configured for releasing, activate the releasing disconnect switch to prevent accidental discharge of a suppression system. Test the circuits as outlined in the Installation Manual. Test in accordance with NFPA 72 Inspection, Testing and Maintenance Chapter(s) and any local requirements. The batteries should be marked with the date of installation and replaced every four years or sooner if battery trouble occurs. Batteries should be checked with a tester acceptable to the AHJ such as a Stone Technologies model STC612A or equivalent. In case of a fuse replacement, refer to the Installation Manual for the proper rating. Contact the agency below for service or operational questions.

For service, contact:

Name: _____

Company: _____

Address: _____

Telephone: _____

Features

- Single module with dual contact monitoring inputs
- Two (2) Class B or one (1) Class A monitoring inputs
- SLC Class A, Class X & Class B
- Mounts in a standard 4” or double gang box
- Wiring terminals accessible when mounted in box
- All wiring terminals accept 22 to 12 AWG
- Product includes a 5 year warranty

NOTE: This addressable module does not support 2-wire smoke detectors.



Description

The PAD100-DIM uses one (1) SLC loop address when monitoring two (2) Class B circuits or one (1) Class A circuit. The module mounts on either a 4” square or double gang box. The module is capable of monitoring two (2) separate class B circuits making it ideal for monitoring sprinkler waterflow and valve tamper switches when they are located in the same proximity. The PAD100-DIM includes one red LED to indicate the module’s status. In normal condition, the LED flashes when the device is being polled by the control panel. When an input is activated, the LED will flash at a fast rate.

Application

The PAD100-DIM is compatible with Potter’s IPA series addressable fire alarm control panels. The PAD100-DIM is an interface module used to monitor dry contact devices such as sprinkler waterflow, valve tamper switches, or conventional pull stations. The module is capable of monitoring two separate Class B or one Class A circuits.

Setting the Address

Each addressable SLC device must be assigned an address. The address is set using the DIP switch located on the PAD100-DIM. When the PAD100- DIM is used to monitor two individual Class B circuits a single device address is assigned, each input is then identified as a sub-point of the module address. For example, if the address number is assigned as “8”, the first input will be “8.1” and the second input will be “8.2”.

Before connecting a device to the SLC loop, take the following precautions to prevent potential damage to the panel or device:


1. Power to the device is removed.
2. Field wiring is correctly installed.
3. Field wiring has no open or short circuits.

Technical Specifications

Operating Voltage	24.0V
Max SLC Standby Current	240µA
Max SLC Alarm Current	240µA
Max Wiring Resistance of IDC	100 Ω
Max Wiring Capacitance of IDC	1µF
EOL Resistor	5.1K Ω
Operating Temperature Range	32 to 120°F (0 to 49°C)
Operating Humidity Range	0 to 93% (non-condensing)
Max no. of Module Per Loop	127 units
Dimensions	4.17” (106mm)L × 4.17” (106mm)W × 1.14” (29mm)D
Mounting Options	Standard 4” Square or Double Gang Box
Shipping Weight	0.6 lbs

Installation Using Compatible Electrical Box


Fig 1

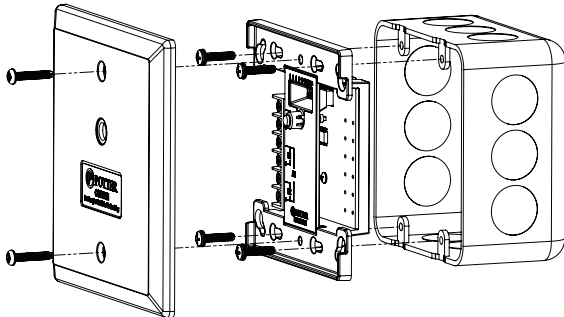

Wiring Diagrams


PAD100-DIM With One Class A Circuit

Fig 2

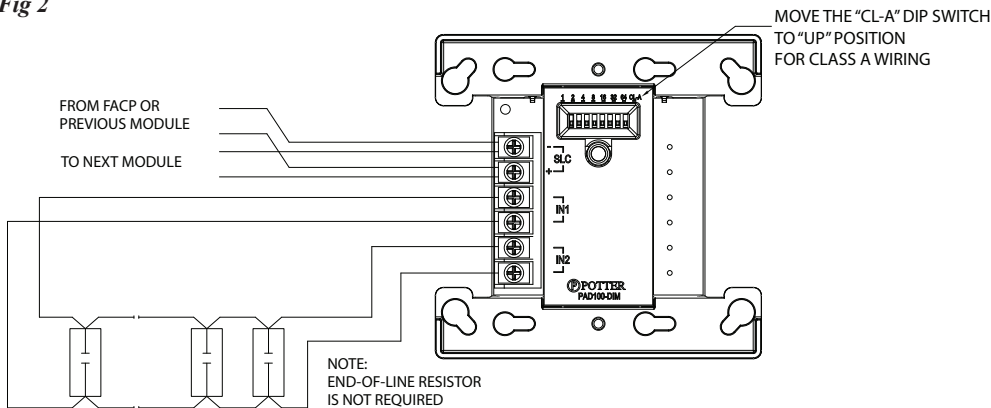

PAD100-DIM With Two Class B Circuits

Fig 3

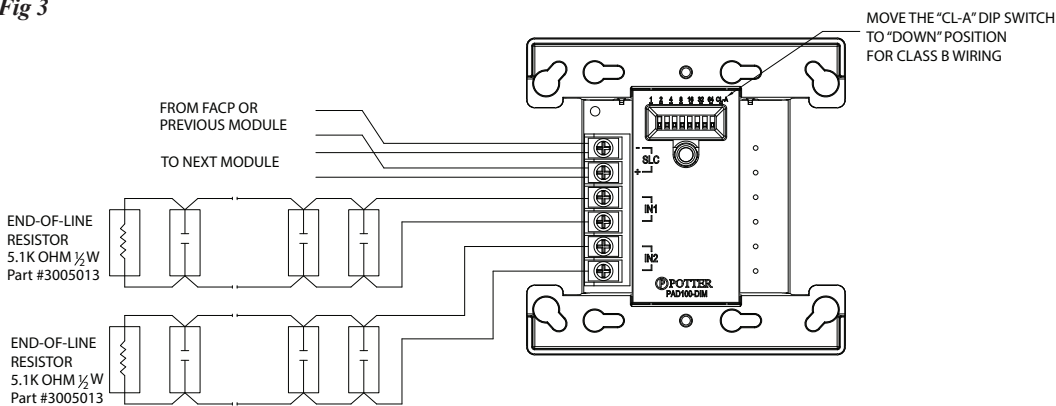

Ordering Information

Model	Description	Stock No.
PAD100-DIM	Dual Input Module	3992703

Features

- Isolates short circuits within the SLC loop.
- SLC Class A, Class X & Class B
- Mounts in a standard 4" or double gang box
- Wire terminals accessible when mounted in box
- All wiring terminals accept 22 to 12 AWG
- Product includes a 5 year warranty



Description

The PAD100-IM module does not require an SLC loop address but does consume power from the SLC loop. The module provides protection against short circuits by limiting the number of affected devices. When the PAD100-IM detects a short circuit on the SLC loop, it disconnects the outgoing side of the module to prevent the short from affecting the rest of the SLC loop. The PAD100-IM includes one red LED to indicate the modules status. When the module is shorted, the LED will light continuously. Once the short is removed, the PAD100-IM will automatically restore to a cleared condition.

Application


The PAD100-IM is compatible with Potter's IPA series addressable fire alarm control panels. The PAD100-IM is used to provide additional reliability by isolating a segment of the SLC loop where a short circuit has occurred.

Technical Specifications

Operating Voltage	24.0V
Max SLC Standby Current	100µA
Max SLC Short Circuit Current	2.75mA
Max no. of PAD100-IM on SLC loop	254 Units
Operating Temperature Range	32 to 120°F (0 to 49°C)
Operating Humidity Range	0 to 93% (non-condensing)
Dimensions	4.17" (106mm)L × 4.17" (106mm)W × 1.14" (29mm)D
Mounting Options	Standard 4" Square or Double Gang Box
Shipping Weight	0.6 lbs

Installation Using Compatible Electrical Box


Fig 1

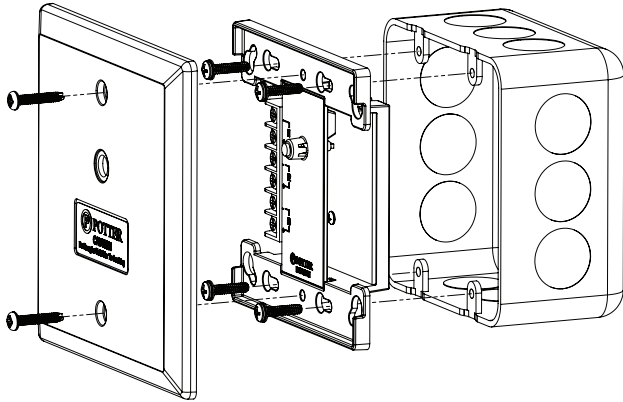

Wiring Diagrams

PAD100-IM Class X Example

Fig 2

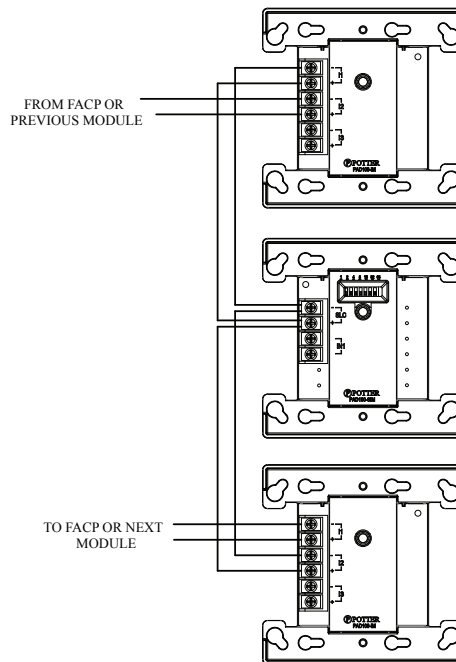

Ordering Information

Model	Description	Stock No.
PAD100-IM	Isolator Module	3992708



Features

- Single or Dual Action versions
- Durable die-cast construction
- Reset key matches the fire alarm control panels
- Compatible with IPA Series panels
- SLC Class A, Class X & Class B
- Product includes a 5 year warranty



Description

The PAD100-PSSA (Single Action) is activated by simply pulling the white “T” bar handle down. The PAD100-PSDA (Dual Action) is activated by lifting the front cover and then pulling the white “T” bar handle down. Once activated, the “T” bar cannot be reset without opening the front cover. Opening the front cover will also activate the pull station. To reset the PAD100-PS Series, use the Potter WS-93 key to unlock and open the front cover. Once the cover is open, push the “T” bar back into the normal position and re-secure the front cover.

Application

The PAD100-PSSA/PSDA is compatible with Potter’s IPA series addressable fire alarm control panels. It is a non-coded addressable pull station available in either a single or dual action model and installs on a single gang box or surface mounts using the P32-BB or P32-DBB (deep) back box.


Technical Specifications

Operating Voltage	24.0 VDC
Max SLC Standby Current	200uA
Max SLC Alarm Current	200uA
Environmental Limitations	32°F - 120°F (0° - 49°C) Indoor Only
Dimensions	4.75” H x 3.25” W x 1.75” D
Relative Humidity Range	0 - 93% (non-condensing)
Mounting Options	Single gang box or Potter P32-BB/DBB
Shipping Weight	APS-SA - 1.22 lbs. APS-DA - 1.46 lbs.


Setting the Address

The PAD100-PS Series uses one SLC address assigned to the device. The address is set using the DIP switch located on the back of the PAD100-PS device.

Pull Station Front View
Fig 1

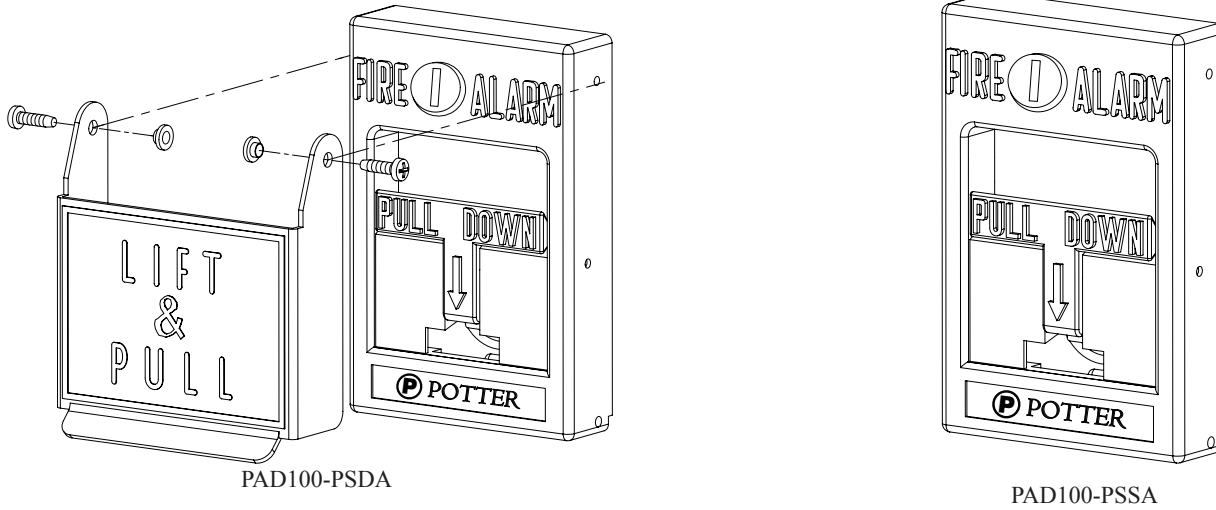

Pull Station Back View and Wiring
Fig 2

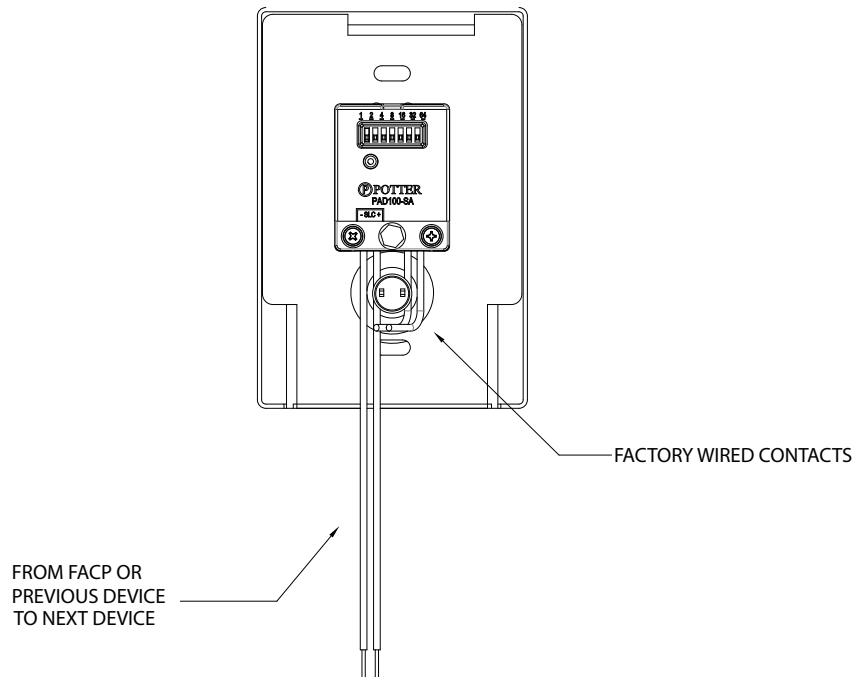

Ordering Information

Model	Description	Stock No.
PAD100-PSSA	Addressable Pull Station, Single Action	3992721
PAD100-PSDA	Addressable Pull Station, Dual Action	3992720

Features

- Detects smoke in building HVAC ducts
- Ships complete with housing and head
- Compatible with addressable IPA series panels
- SLC Class A, Class X & Class B
- Installation without removing the head
- Listed Air Velocity of 100 to 4,000 ft/minute
- No screens or filters in housing
- Durable plastic enclosure and clear cover
- Integrated cover tamper switch
- Utilizes simple snap in sampling tubes STN series
- One form C relay
- Compatible with supervised PAD100-DRTS remote test switch, MS-RA, MS-KA/R, MS-KA/P/R remote indicators
- Product includes a 5 year warranty



Description

The PAD100-DUCTR is designed and built to meet all local requirements, as well as the NFPA regulations regarding duct smoke detectors. Air sampling is accomplished by two tubes which protrude into the duct. An exhaust tube of one standard length (7") is supplied in the installation kit with the smoke duct unit. Once the duct width has been determined the air intake sampling tubes must be ordered. Sampling tubes are supplied in three standard lengths: 2.5 ft., 5 ft., and 10 ft. and cut to size to fit the duct. Mounting the duct smoke unit is accomplished by the use of a template and 2 sheet metal screws, which are provided. Mounting can be achieved without the removal of the clear cover which is secured by 4 capture screws.

Application

The Potter Electric PAD100-DUCTR duct smoke detector provides early detection of smoke and products of combustion present in air moving through HVAC ducts in commercial, industrial and residential applications. The PAD100-DUCTR is compatible with the IPA series addressable fire alarm control panels.

Technical Specifications

Duct Detector Model Number	PAD100-DUCTR
Operating Voltage	24 VDC
Current Draw	500 μ A
Detector Head Model	PAD100-DD
Detector Head Type	Photoelectric
Sensitivity Test Method	Self diagnostic test
Air Velocity	100 to 4000 ft./min
Ambient Temperature	32°F to 120°F (0°C to 49°C)
Humidity	10% to 85% Relative humidity (non-condensing)
Housing Material	Plastic backbox, clear plastic cover
Finish	Gray backbox with clear cover
Dimensions	13 1/2"L x 4 1/2" W x 2 1/4" H
Maximum Net Weight	2 lbs.
Sampling Tubes	2.5 ft., 5 ft., or 10 ft.
Relay contact rating	8A@30VDC, 10A@120VAC, 10A@250VAC


Engineering Specifications

Air duct smoke detectors shall be Potter Electric PAD100-DUCTR Series. The detectors shall be listed by Underwriters Laboratories per UL 268A. The detectors shall operate at air velocities from 100 feet per minute to 4000 feet per minute. The duct detector housings shall be of plastic construction and complete mechanical installation may be performed without removal of detector cover. Visual indication of alarm and power must be provided on detector front. Detector heads shall not require additional filters or screens which must be maintained. The housing shall contain a detector base and PAD100-DD duct smoke detector head. Terminal connections shall be of the screw type and be a minimum of # 12 screw. All wiring must comply with local codes and regulations. Detector shall use the STN series of sampling tubes.

Wiring Diagrams


PAD100-DRTS Wiring

Fig 1

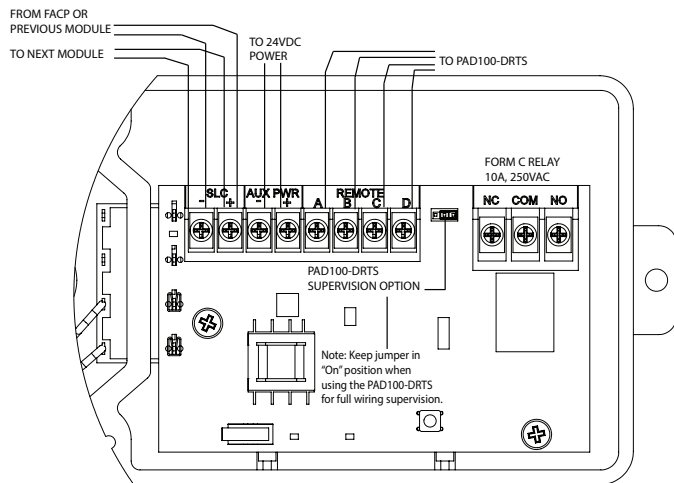

MS-KA/P/R Wiring

Fig 2

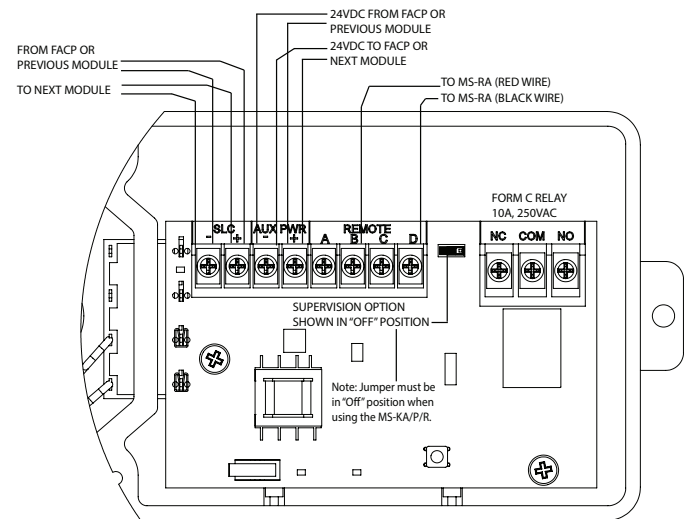

Ordering Information

Model	Description	Stock No.
PAD100-DUCTR	Analog Addressable Duct Detector	3992712
PAD100-DRTS	Duct Remote Test Switch	3992711
MS-RA	Remote Annunciator	1000256
MS-KA/R	Remote Annunciator with Test/Reset Switch	1000254
MS-KA/P/R	Remote Annunciator with Test Switch	1000253

Model	Description	Stock No.
STN-2.5	2.5' Sampling Tube	1000274
STN-5	5' Sampling Tube	1000275
STN-10	10' Sampling Tube	1000276

Features

- Integrated Sounder in base
- 75 dB (UL 464 Listed) sounder output
- Sounder independent of sensor, allows for a single station, grouped or all-call
- May be mapped to any device connected to the control panel
- Terminals accept 22 to 12 AWG wire sizes
- Supports Class A, Class X and Class B wiring
- Does not require SLC Loop address



Description

The Addressable Sounder Base 6" (PAD100-SB) is a sounder base that may be utilized in a variety of applications. The base has a locking feature for the sensor that may be used or removed in the field. Once the head is removed, the sounder is accessible in the bottom of the unit.

The base has an independent sounder module that may be programmed as a single station, zone or all call sounder. The PAD100-SB passes through the sound pattern sent to the sounder, therefore it may reproduce in any pattern the power supply provides.

The panel will support any combination of sensors or modules on the SLC. The PAD100-SB does not consume an address on the loop and is fully programmable to operate with any input. Once activated the sounder will also follow the input from the power source and deactivate accordingly.

Technical Specifications

Working Range for SLC	24 VDC
Working voltage range for PWR	16 - 33 VDC
Active current for PWR	30 ma
Sound pressure level	75dB/10ft (min.) as per UL464
Installation temperature range	32°F to 120°F (0°C to 49°C)
Operating relative humidity range	0% to 93% (Non-condensing)
Start-up time	Max. 1 sec.
Maximum number of devices per zone	127
Color	Eggshell White
Dimensions (without detector)	Height: 0.75 in (19mm) Diameter: 6.3 in (166 mm)

Features

- Low profile, less than 2 inches with the base
- Wide selectable sensitivity range of 1.0 to 3.7%/foot
- Sensor communicates sensitivity to control panel
- UL listed smoke calibration and sensitivity
- Optional locking tab to prevent unwanted removal
- Simple DIP switch address setting, no programming tool required
- LED alarm indicator
- Product includes a 5 year warranty



Description

The Photoelectric Smoke Sensor is a listed Analog Addressable smoke sensor compatible with fire alarm control panels that utilize the Potter Addressable Device (PAD) protocol. The PAD100-PD is a low profile smoke sensor with a wide sensitivity range. The sensor and base (not included) are made of a durable plastic in an off-white color to blend in with the ceiling.

The PAD100-PD has a sensitivity range of 1.0 to 3.7 % per foot and is UL. The PAD100-PD features drift compensation and has built in dirty detector warning as well as. The PAD100-PD and the control panel communicate over a proven and robust digital communication path and the system analyzes the information at the particular device. The total polling speed is less than five (5) seconds, well under the UL requirements.

The sensor is compatible with any of the PAD series sensor bases and simply twists on. The PAD100-PD is addressed using DIP switches in the rear of the sensor and can be easily programmed in the field without special tools.

Setting the Address

Each addressable device on the SLC loop must have a unique address from 1 to 127 to function properly. The address is set using DIP switches.

Before connecting a device to the SLC loop, take the following precautions to prevent potential damage to SLC or device. Verify the following:

1. Power to the device is removed
2. Field wiring is correctly installed.
3. Field wiring has no open or short circuits.

Technical Specifications

Operating Voltage	24 VDC
Alarm indicator	1 LED
Alarm set-point range	1.0 to 3.7 %/ft 3.6-12 %/m
Installation temperature range	32 to 120 ° F / 0 to 49 ° C
Operating relative humidity range	0% to 93% (Non-condensing)
Start-up time	Max. 1 sec.
Maximum number of addresses per loop	127
Maximum number of lighted indicators in alarm per loop.	30
Color	Eggshell White
Weight (without base)	101g (3.56oz)
Dimensions (without base)	Height: 1.35 in (34mm) Diameter: 3.93 in (100 mm)

Air Velocity Ratings

The PAD100-PD has an Open Area of Protection air velocity rating of 0 to 300 feet per minute.

The system has a maximum of 30 LEDs that can be turned on simultaneously. If the system already has 30 LEDs on, the PAD100-PD will operate even though the LED may not illuminate.

Operation

The PAD100-PD is an analog addressable sensor that uses one address on the Signaling Line Circuit (SLC) of a compatible fire alarm control panel. The unit communicates with the control panel as it is polled. The LEDs flash every time the unit is polled and they will flash at a fast rate if the unit is in an active status. The polling LED can be turned off if desired for less conspicuous operation.

The PAD100-PD with the PAD100-4DB or PAD100-6DB has a low profile of less than two (2) inches to blend into the surrounding environment. The sensor includes an insect screen to prevent foreign objects from reaching the chamber and the can be cleaned to restore operation of a dirty detector.

Sensor Sensitivity

The PAD100-PD and the compatible control panel work in tandem to keep the sensitivity consistent. As the sensor is installed over time, the sensor compensates for the dirt in the unit until it is out of range. At that time, the panel will indicate a dirty sensor. The sensor will then have to be cleaned or replaced.

The PAD100-PD can be programmed to provide a maintenance alert prior to reaching the dirty sensor level which will allow for intervention prior to the sensor going into trouble. This allows for sensor replacement or cleaning prior to a nuisance trouble occurs.

NOTE: As required by NFPA, do not install the sensors until all construction is complete and the work area has been thoroughly cleaned. If the sensors have been installed in a construction environment, they should be cleaned or replaced before the system is placed into service.

Spacing

The PAD100-PD is UL listed with a recommended maximum spacing of 30 feet. Refer to NFPA 72 for specific information regarding detector spacing, placement and special applications.

Compatible Bases

All bases will mount on a single gang, double gang, octagon, 4" square or mud ring electrical box.

Device	Description	Stock No.
PAD100-4DB	4" Standard Base	3992731
PAD100-6DB	6" Standard Base	3992732
PAD100-IB	6" base with an isolator module included.	3992730
PAD100-RB	6" base with one Form-C relay contact. 2A @ 30VDC, 0.5A @ 125VAC	3992728
PAD100-SB	6" base with sounder module included. Sound pattern is provided from external source.	3992729


Ordering Information

Model	Description	Stock No.
PAD100-PD	Photoelectric Smoke Sensor	3992733

Detector Base Mounting

PAD100-SB should be mounted directly on the electrical box. The mounting holes are configured for a single gang, double gang, octagon or 4” square box. See Fig. 1.


Fig. 1

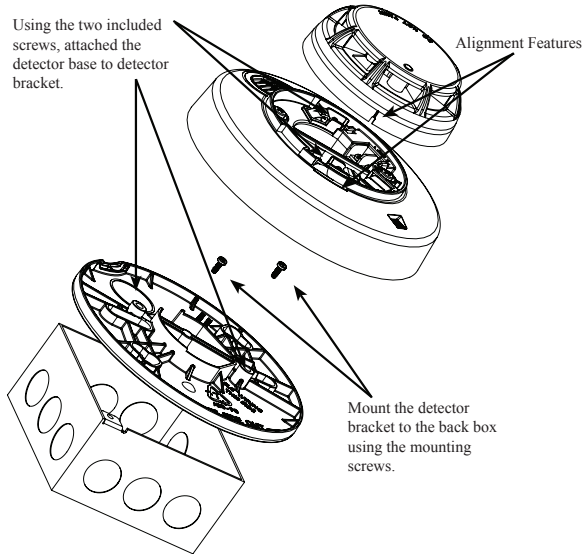

Removing of Detector Head from Base

2. To remove the detector from the base once the locking feature has been activated, insert a small screwdriver into the slot on the base to push the plastic tab while simultaneously turning the detector head counter-clockwise. See Fig. 3.

Fig. 3

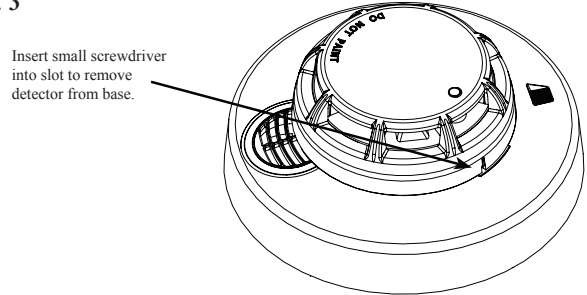

3. To remove the base cover from the lower enclosure once the locking feature has been activated, insert a small screwdriver into the slot on the on the base to push the plastic tab while simultaneously turning the detector head counter-clockwise.

Ordering Information

Model	Description	Stock No.
PAD100-SB	Addressable Sounder Base	3992729


Locking Feature

Eliminate the Locking Feature

PAD100-SB include a locking feature that prevents removal of the detector and removal of the base cover without using a tool.

1. To eliminate this feature, break off the locking tab and then install the detector. See Fig. 2.

Fig. 2

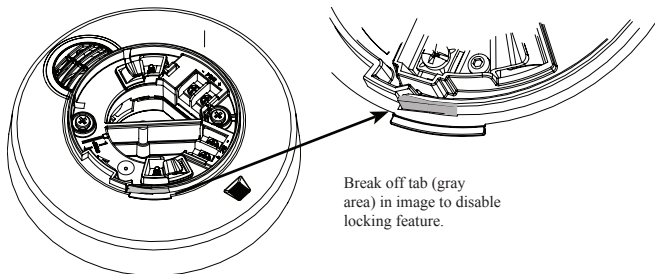

Features

- Selectable Rate of Rise and/or Fixed Heat Detector
- Low profile
- Reliable detection technology
- LED Alarm Indicator
- Ambient temperature listing of 32° F to 150° F
- Simple DIP switch address setting, no programming tool required
- Product includes a 5 year warranty



Description

The PAD100-HD is a listed Analog Addressable rate of rise and/or fixed temperature heat sensor compatible with any fire alarm control panel that has the Potter Addressable Device (PAD) protocol. The heat sensing portion utilizes a proven thermistor for accurate and reliable heat detection. The sensor and base (not included) are made of a durable plastic in an off white to blend in with the ceiling.

The PAD100-HD is UL listed with a selectable fixed temperature point from 135° to 185° Fahrenheit and can be used for rate of rise applications. See detector spacing limitations below. This flexibility allows the installer to cover a wide variety of applications with a single unit.

The PAD100-HD and the control panel communicate over a proven and robust digital communication path and the system analyzes the information at the particular device. The total polling speed is less than five (5) seconds, well under the UL requirements.

The sensor is compatible with any of the PAD series sensor bases and simply twists on. The PAD100-HD is addressed using DIP switches in the rear of the sensor and can be easily programmed in the field without special tools.

Setting the Address

Each addressable device on the SLC loop must have a unique address from 1 to 127 to function properly. The address is set using DIP switches.

Before connecting a device to the SLC loop, take the following precautions to prevent potential damage to SLC or device. Verify the following:

1. Power to the device is removed
2. Field wiring is correctly installed.
3. Field wiring has no open or short circuits.

Technical Specifications

Operating Voltage	24 VDC
Alarm indicator	1 LED
Alarm set-point range	135 to 185 °F/ 57 to 85 °C
Installation temperature range	32 to 150 °F / 0 to 66 °C
Operating relative humidity range	0% to 93% (Non-condensing)
Start-up time	Max. 1 sec.
Maximum number of addresses per loop	127
Maximum number of lighted indicators in alarm per loop	30
Color	Eggshell White
Weight (without base)	82g (2.89 oz)
Dimensions (without base)	Height: 1.94 in (49mm) Diameter 3.93 in (100mm)

Operation

The PAD100-HD is an analog addressable sensor that uses one address on the Signaling Line Circuit (SLC) of a compatible fire alarm control panel. The unit communicates with the control panel as it is polled. The LED flashes every time the unit is polled and will flash at a fast rate if the unit is in an active status. The polling LED can be turned off if desired for less conspicuous operation.

The PAD100-HD with the PAD100-4DB or PAD100-6DB has a low profile to blend into the surrounding environment. The system has a maximum of 30 LEDs that can be turned on simultaneously. If the system already has 30 LEDs on, the PAD100-HD will operate even though the LED will not illuminate.

Spacing

The ANSI/UL listed spacing limitations of PAD100-HD smooth ceiling are dependent on alarm set point.

Alarm Set-Point	Rate of Rise Spacing	Fixed Temperature Spacing
135°F to 160°F (57°C to 71°C)	Max. 70 ft.	Max. 70 ft.
161°F to 174°F (72°C to 79°C)	Max. 60 ft.	Max. 60 ft.
175°F to 185°F (80°C to 85°C)	Max. 15 ft.	Max. 15 ft.

Compatible Bases

All bases will mount on a single gang, double gang, octagon, 4" square or mud ring electrical box.

Device	Description	Stock No.
PAD100-4DB	4" Standard Base	3992731
PAD100-6DB	6" Standard Base	3992732
PAD100-IB	6" base with an isolator module included.	3992730
PAD100-RB	6" base with one Form-C relay contact. 2A @ 30VDC, 0.5A @ 125VAC	3992728
PAD100-SB	6" base with sounder module included. Sound pattern is provided from external source.	3992729

Ordering Information

Model	Description	Stock No.
PAD100-HD	Fixed Temperature Heat Sensor	3992735

Features

- Carbon Monoxide detection device compliant with UL 2075
- 8 year lifespan with built in end of life indication
- Low profile
- Walk Test mode allows for fast easy validation of sensor operation
- Reliable detection technology
- LED Alarm Indicator
- Product includes a 5 year warranty



Description

The PAD100-CD is an Analog Addressable carbon monoxide (CO) sensor compatible with any fire alarm control panel that has the Potter Addressable Device (PAD) protocol. The CO sensing portion utilizes a proven electrochemical sensor for accurate detection of CO gas for life safety applications. The sensor and base (not included) are made of a durable plastic in an off white to blend in with the ceiling.

The PAD100-CD is listed to comply with the requirements of UL 2075. The sensor and the control panel communicate over a proven and robust digital communication path and the system analyzes the information at the particular device. The total polling speed is less than five (5) seconds, well under the UL requirements.

The sensor is compatible with any of the PAD series sensor bases and simply twists on. The PAD100-CD is addressed using DIP switches in the rear of the sensor and can be easily programmed in the field without special tools.

Setting the Address

Each addressable device on the SLC loop must have a unique address from 1 to 127 to function properly. The address is set using DIP switches.

Before connecting a device to the SLC loop, take the following precautions to prevent potential damage to SLC or device. Verify the following:

1. Power to the device is removed
2. Field wiring is correctly installed.
3. Field wiring has no open or short circuits.

Technical Specifications

Operating Voltage	24 VDC
Alarm indicator	1 LED
Alarm set-point range	70 ppm, 150 ppm, 400 ppm
Installation temperature range	32 to 120 °F / 0 to 49 °C
Operating relative humidity range	0% to 93% (Non-condensing)
Start-up time	Max. 1 sec.
Maximum number of addresses per loop	127
Maximum number of lighted indicators in alarm per loop	30
Color	Eggshell White
Weight (without base)	92g (3.25oz)
Dimensions (without base)	Height: 1.43 in (36mm) Diameter: 3.93 inches (100mm)

Operation

The PAD100-CD is an analog addressable sensor that uses one address on the Signaling Line Circuit (SLC) of a compatible fire alarm control panel. The unit communicates with the control panel as it is polled. The LED flashes every time the unit is polled and they will flash at a fast rate if the unit is in an active status. The polling LED can be turned off if desired for less conspicuous operation.

The PAD100-CD with the PAD100-4DB or PAD100-6DB has a low profile of less than two (2) inches to blend into the surrounding environment.

Detection Levels

The PAD100-CD will provide alarm reports at these required levels:

Alarm set-point

70 ppm for 2 hours

150 ppm for 30 min

400 ppm for 10 minutes

Compatible Bases

All bases will mount on a single gang, double gang, octagon, 4" square or mud ring electrical box.

Device	Description	Stock No.
PAD100-4DB	4" Standard Base	3992731
PAD100-6DB	6" Standard Base	3992732
PAD100-IB	6" base with an isolator module included.	3992730
PAD100-RB	6" base with one Form-C relay contact. 2A @ 30VDC, 0.5A @ 125VAC	3992728
PAD100-SB	6" base with sounder module included. Sound pattern is provided from external source.	3992729

Ordering Information

Model	Description	Stock No.
PAD100-CD	Carbon Monoxide Detector	3992736



patent pending



7315-0328-0189

Product includes a 5 year warranty

Dimensions: 16 1/8"W x 16 3/4"H x 3 1/2"D

Stock Number: 3006436 PSN-64 Red Enclosure
3006437 PSN-106 Red Enclosure
3006446 PSN-106 Black Enclosure

Description

The PSN series of notification power supplies offers reliable notification power with unprecedented versatility. The power supplies offer either 6 or 10 amps of continuous power through 4 or 6 outputs respectively. Each output is rated at 3 amps and it may be used continuously without any derating.

The power supply operates on either 120 VAC or 220 VAC power input and has a regulated 24 VDC output. In addition, the panel can charge up to 55 AH batteries and leads the industry in housing up to 18 AH batteries. The cabinet is constructed out of 18 gauge cold rolled steel and has a durable red powder coat finish. In addition, a key lock is provided for securing the door. Ample electrical knockouts are provided on the sides and the top, allowing the installer options for running wires and maintaining the correct separations.

The power supply offers an industry leading Quadrasync function that allows for multiple strobe circuits of different brands to be synchronized to flash at the same time. The panel can have four different brands each connected to its own circuit and all of the strobes flash together.

Each output can independently be configured to provide one of four synchronizations or steady power. This provides unequivocal flexibility in new and retrofit installations. The panel can be configured to synchronize Potter/AMSECO®, Gentex®, Wheelock® and System

UL, cUL, CSFM Listed

- PSN-64 has 6 amps regulated with 4 Outputs
- PSN-106 has 10 amps regulated with 6 Outputs
- Outputs Rated at 3 amps maximum each
- May be configured as up to three class "A" Style "Z" notification circuits
- 3 amp, 24 VDC programmable output power
- Supervised Battery Charger: 27.3 @ 1A (supports 7-55 AH batteries)
- Easy to install cabinet with leveling mounts and key lock
- Wiring knockouts provided on sides and top of cabinet
- Two Trouble Relays (5A at 30VDC)
 - General System Trouble (programmable for AC delay)
 - Low AC Trouble with optional delay settings
- Diagnostic LED's
 - Status LED's for Active NAC and NAC trouble conditions
 - Status LED's for Earth Fault (Amber), AC (Green), Battery Fault (Amber)
- Trouble Memory feature captures troubles which have previously restored
- Synchronized notification appliance circuits
 - Potter/AMSECO®, Wheelock®, Gentex®, System Sensor®
- Configurable output circuits (DIP switch sets options for each circuit)
- 15 mA at 8-33 VDC input trigger
- Reference EOL allows 2K – 27K EOL value to be used
- Quadrasync provides panel wide synchronization of same or multiple brands
- PassThru mode allows the Outputs to match the Input Signal

Electrical Specs:

- 120/240 VAC 50-60 Hz input
- 5.1 Amps @ 120 VAC or 2.5 Amps @ 240 VAC
- Battery Standby Current 75 mA
- Alarm Standby Current 75 mA (no external load)
- Terminals support 12 - 18 AWG wire.

Sensor® strobe devices. Each output can be configured the same sync protocol or set independently.

In addition, the panel has an input PassThru mode allows the outputs to follow the input signal and sync up the input flash. The panel will recognize the type of input being supplied and pass this through to the outputs with the same pattern. This input pass through can be selected on each output independently.

The power supply contains simple dipswitch programming and LED indications providing the installer indications of the operation and the ability to correct any faults. A Trouble Memory is provided to allow an installer to review past troubles and make the necessary repairs. Each output has an LED to pin point the exact circuit where a problem may have occurred. Relays are provided for monitoring the general system and AC failure.

Each output can be independently configured for various applications and installations. Each output can be independently configured for Class A or Class B operation, constant power, ANSI Temporal Code 3, Single, Multiple or Combo Inputs or Door Holder Power.

Features

- 127 addresses available on this analog addressable system
- Additional system capacity achieved via multi-point SLC modules
- 99 software zones
- NFPA 72 Compliant Smoke Sensitivity Test Built-In
- System Operates as Class A or Class B for SLC, P-Link and NACs
- 5 Amp Power Supply, Expandable to 310 amps
- 2 NACS, Regulated, Rated at 3 Amps each, expandable to 188
- 2 Input/Output (I/O) Circuits for system flexibility rated at 1 Amp each, ideal for manual release and abort
- Strobe Synchronization and System Wide Sync for Potter/AMSECO®, Gentex®, Cooper Wheelock® and System Sensor® strobes
- Dedicated Alarm, Supervisory and Trouble Relays
- 4,000 Event History Buffer
- Cabinet will house up to 18 AH batteries
- Optional two line DACT with UD-1000 that can report General, Zone or Point Information
- Built in IP Communicator
- Ethernet Port for Programming and Network Connectivity
- E-Mail System Status, Reports and Event Information
- Product includes 5 year warranty



Description

The IPA-100 is an analog/addressable releasing fire alarm system with a total system capacity of 127 addresses. Additional capacity on the system is achieved using multi-point SLC modules. The control panel utilizes the exclusive Potter protocol that includes a complete line of sensors and modules. Each SLC may be comprised of any combination of smoke sensor, heat detectors or modules and allows for a total of 50 ohms of impedance and may use any wire compliant with the National Electrical Code (NEC).

The IPA-100 has a 5 Amp power supply with two Notification Appliance Circuits (NACs) and two Input/Output (I/O) circuits. The NACs are rated at 3 Amps each and the I/Os are rated at 1 Amp each. Each output is regulated and power limited. In addition, each output is uniquely programmable and may be configured for steady signal, strobe synchronization, constant power, door holder power, or releasing. The strobe synchronization includes Potter/AMSECO, Gentex, System Sensor and Cooper/Wheelock and with the exclusive Quadrasync each output may have a unique brand and all strobes will flash together. The I/Os are designed for inputs such as manual release stations and abort switches that will not require polling and react nearly instantaneously.

The IPA-100 is listed for releasing of fire suppression systems. The software allows cross zones, counting zones, and timers for suppression. The system is capable of multiple release outputs across multiple hazards. In addition, the PSN-1000 may be used to extend releasing capability. The NACs may be expanded using the PSN-1000 series intelligent power supplies. Each PSN-1000 adds another 10 Amps of power, 2 additional input circuits and the IPA-100 will support up to 31 power supplies. The system will synchronize the strobes system wide. In addition, the PSN-1000E has space to allow the installation of up to six loop expansion cards. The cards mount on a stacker bracket that allows access to all SLC circuit connections.

Technical Specifications

Dimensions	16"W x 17"H x 3 7/8"D
AC Mains	3.0 Amps @ 120 VAC 50/60 HZ 2.0 Amps @ 240 VAC 50/60 HZ
Enclosure	16 gauge cold rolled steel with removable locked door with Lexan viewing window
Battery	Standby Current-130 mA Alarm Current-200 mA <ul style="list-style-type: none"> • 5 Amps power for NACs, I/O, and P-Link • 3 Amps per NAC, regulated • 1 Amp per I/O circuit, regulated • Battery Charger range 8-55 Ah • Battery Charger voltage 27.3 VDC • P-Link maximum current of 1 Amp
Temperature and Humidity Range	32° to 120° (0°C to 49°C) with a maximum humidity of 93% non-condensing.
Standards	<ul style="list-style-type: none"> • NFPA 12, 12A, 13, 15, 16, 17, 17A, 70, 72, 750, and 2001 • ANSI/UL 864 - Local (L), Remote Station (RS), Central Station (CS), Propriety (PPU), Auxiliary (AUX). Type of Service: Automatic (A), Manual (M), Water flow (WF) Sprinkler Supervisory (SS) Type of Signaling: Digital Alarm Communicator (DAC), March Time (March), Non Coded (NC), Reverse Polarity (Rev Pol), Other Technologies (OT) • IBC 2000, 2003, 2006, 2009, 2012

SLC Loop Accessories

The control panel may be connected with up to 127 addressable devices or modules in any combination. The SLC is not restricted by any special wire requirements and may be wired with any wire that complies with the NEC.

SLC Loop Devices

Device	Description
PAD100-PD	Analog Photo Electric Smoke Detector is a smoke detector with a listed obscuration of 1.02 to 3.83 percent per foot.
PAD100-PHD	Combination Analog Photo Electric Smoke/Heat Detector – a smoke detector with a listed obscuration of 1.02 to 3.83 percent obscuration and a fixed temperature 135° Fahrenheit heat detector.
PAD100-HD	Analog Fixed Temperature Heat Detector that is selectable from 135° F to 185°F.
PAD100-DUCTR	Addressable Duct Smoke Detector with Form C Relay.
PAD100-DUCT	Addressable Duct Smoke Detector.
PAD100-6B	6” round base that is mounted to an electrical box and wired for connection of one of the above sensors.
PAD100-4B	4” round base that may be mounted to an electrical box and wired for connection to the above sensors.
PAD100-IB	Isolator base that interrupts a short in a SLC and prevents the short from affecting protected devices on the loop.
PAD100-RB	Addressable Relay Base that contains one relay controlled by the SLC. Relay is rated at rated at 2 amps at 30 VDC or 0.5A at 125VAC.
PAD100-SB	Addressable Sounder Base that contains an addressable sounder module that may be configured for local, group and all call.
PAD100-CD	Addressable CO gas detector.
PAD100-DD	Addressable photo electric smoke detector for use in DUCT/DUCTR enclosure.

Modules

Device	Description
PAD100-MIM	Micro Input Module provides a small foot print contact module for mounting inside an enclosure.
PAD100-PSSA	Single Action Addressable Pull Station.
PAD100-PSDA	Dual Action Addressable Pull Station.
PAD100-SIM	Single Input Module is a standard contact module with an LED that mounts into a 4” square electrical box.
PAD100-DIM	Dual Input Module is a device that can monitor two distinct inputs with a single device or in a Class A mode.
PAD100-TRTI	Two Relay Two Input module provides two form C relays that are individually controlled by the control panel. Each relay is rated for 2 amps at 30VDC or 0.5 amps at 125VAC. Also provides two contact inputs.
PAD100-NAC	Notification Appliance Circuit module is an addressable remote appliance circuit controlled by the panel.
PAD100-ZM	Zone Module is used to connect conventional 2-wire smoke detectors to the system.
PAD100-IM	Isolater Module interrupts a short on the SLC and prevents the short from affecting protected devices on the loop.
PAD100-RM	Relay Module that provides one form C relay controlled by the control panel. Relay is rated for 2 amps at 30VDC or 0.5 amps at 125VAC.
PAD100-LED	Module provides a single addressable LED that is controlled by the control panel.
PAD100-SM	Speaker Module provides switching for two audio channels.
PAD100-LEDK	Addressable LED and key switch that mounts in a single gang box.
PAD100-DRTS	DUCTR Remote Test Switch that mounts in a single gang box and optionally supervised.
PAD100-OROI	One Relay One Input Module provides one form C relay and one input. The relay is rated at 2 amps at 30VDC or 0.5 amps at 125VAC.

SLC Features

The Potter protocol is a digital protocol with a proven design for reliability and noise immunity. The system does not require special cable or conductors for connection of the Signaling Line Circuit as long as the cable is compliant with NFPA 70 and NFPA 72. The system allows for Class A or Class B installations as well as “T-Taps”, with a max wiring distance of 10,000 Ft.

Sensor Features

The sensors through the fire alarm control panel provide a real time status as to the condition of the system. The smoke detector sensitivity, heat detector temperature level and drift compensation are all programmable options. The system also allows for a day/night mode where the panel automatically adjusts the sensitivity depending on the time of day. To assist in the reduction of false alarms, the smoke detectors also have a maintenance warning that sends a trouble signal when a detector is dirty to the point that it can no longer maintain the programmed sensitivity.

User Interface

The fire alarm control panel has a 2 x 16 LCD display to provide information to the system status. The keypad has navigation keys to allow manipulation of the Menu on board the panel. The panel is shipped standard with the following LEDs:

- AC Power - Green
- Alarm - Red
- Earth Fault - Amber
- Supervisory - Amber
- Silenced - Amber
- Trouble - Amber
- Pre-Release - Amber
- Release - Red

The common buttons include a Silence, Reset, Acknowledge, and Drill. All of the buttons are accessible once the locked door is opened.

P-Link

The IPA-100 has a proprietary communication protocol that communicates through a RS-485 connection to field devices. Up to 64 devices may be connected to a single P-Link connection. The P-Link includes the communication terminals and regulated 24 VDC connection for the field devices. The field devices may be any of the following:

PAD100-SLCE-Analog/Addressable loop expansion module

RA-6075R – 2 x 16 LCD annunciator with a key pad in a locked metal enclosure.

RA-6500R(F) – 4 x 40 LCD annunciator with a key pad in a locked metal enclosure. Flush mount version available.

LED-16(F) – 16 LED annunciator with common indicators in a locked metal enclosure. Flush mount version available.

PSN-1000(E) – 10 amp, remote intelligent power supply with 6 NACs, 2 I/Os and a P-Link repeater. This panel is listed in conjunction with the IPA-100 as releasing circuits.

CA-6500 – Class A convertor that converts the SLC, NACs and P-Link connection

UD-1000 – UL listed, Dual line telephone alarm communicator

DRV-50 – LED driver expander, used to connect up to 50 LEDs in a graphic display

FCB-1000 – Fire communication bridge, provides remote mounting of the Ethernet connection

FIB-1000 – Fiber interface module, used to extend P-Link to multi-mode fiber (2 required)

RLY-5 – Relay module, provides 5 form C relay contacts rated at 3.0 amps 24VDC/125AC

SPG-1000 – Serial parallel gateway, allows for the connection to a serial or parallel printer

The **FIB-1000**, **FCB-1000** and the **SPG-1000** may be installed in the stacker bracket or ordered with the optional rack mount enclosure.

MC-1000 Multi-Connect allows up to sixty-three IPA series panels to share a single reporting technology.

AE-2 – Two card expansion cabinet

AE-8 – Eight card expansion cabinet


AE-14 – Fourteen card expansion cabinet

Ethernet/I.P. Connection

The IPA-100 is shipped standard with an Ethernet connection. This connection is the programming port and may be connected to a building Wide Area Network (WAN) or Local Area Network (LAN). Once connected to the Internet, the panel may be selectively programmed to e-mail alarm conditions, trouble conditions, supervisory conditions, test, Event History and detector status. An e-mail may be sent to the panel and the panel will e-mail the event history, detector status, configuration file or server status to an authorized E-mail account. In addition, reminders may be set to send an e-mail for service, testing or other conditions.

In addition, the Ethernet connection is UL listed as an IP communicator. The IP communicator is listed to report to the UL listed Sur-Gard III IP receiver. The IP communicator replaces the traditional less reliable alarm communicator transmitter that utilized telephone lines. The IP communicator is an active method of connection and communication to the monitoring station.

Dimensions

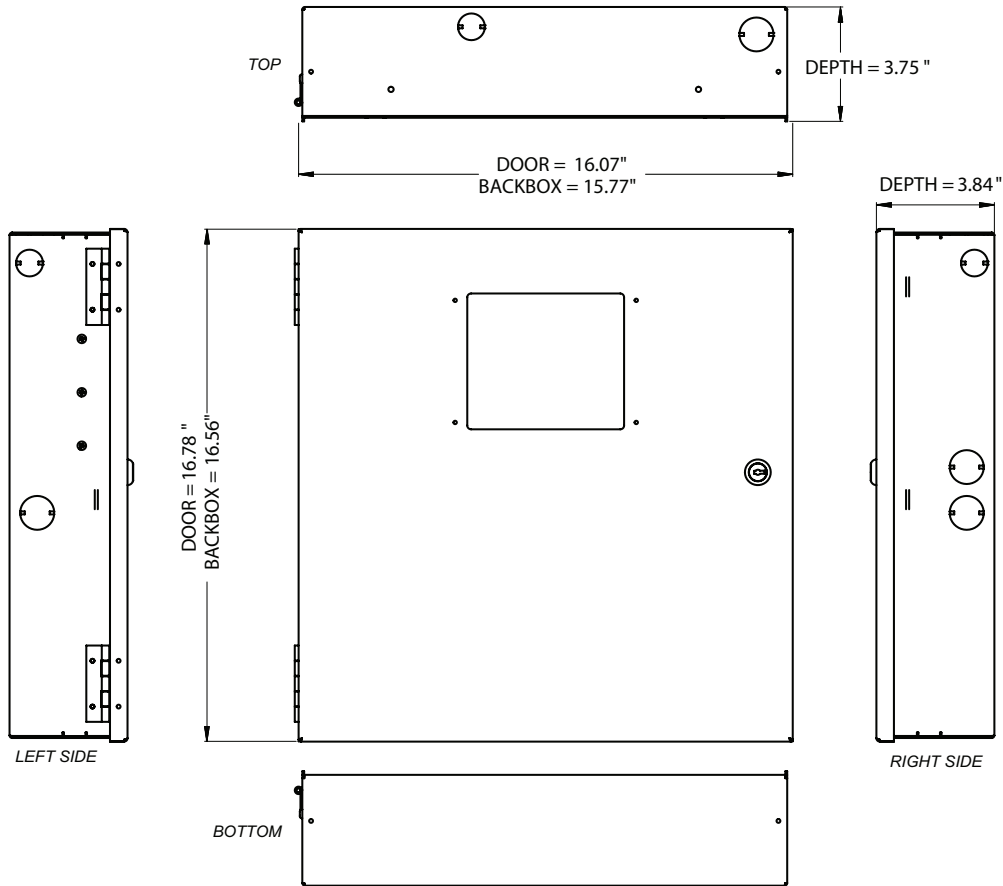

DWG #593-1

Ordering Information

Model	Description	Stock No.
IPA-100	Fire Alarm Releasing Control Panel	3992715


Compatible Releasing Devices

Note: For releasing applications please order the Potter EOLD (3005012) for circuits connected to a releasing solenoid or actuator.

Brand	Description
Skinner	73218BN4UNLVN0C112CZ 73212BN4TNLVN0C322C2
Victaulic	753-E Series
Mini Max	MX123 & MX200 w/ 8876677 & 889323
Viking	11591, 11601, 11602, 13843, & 13844
TLX	PA0036



PSN-106 Wiring Diagram

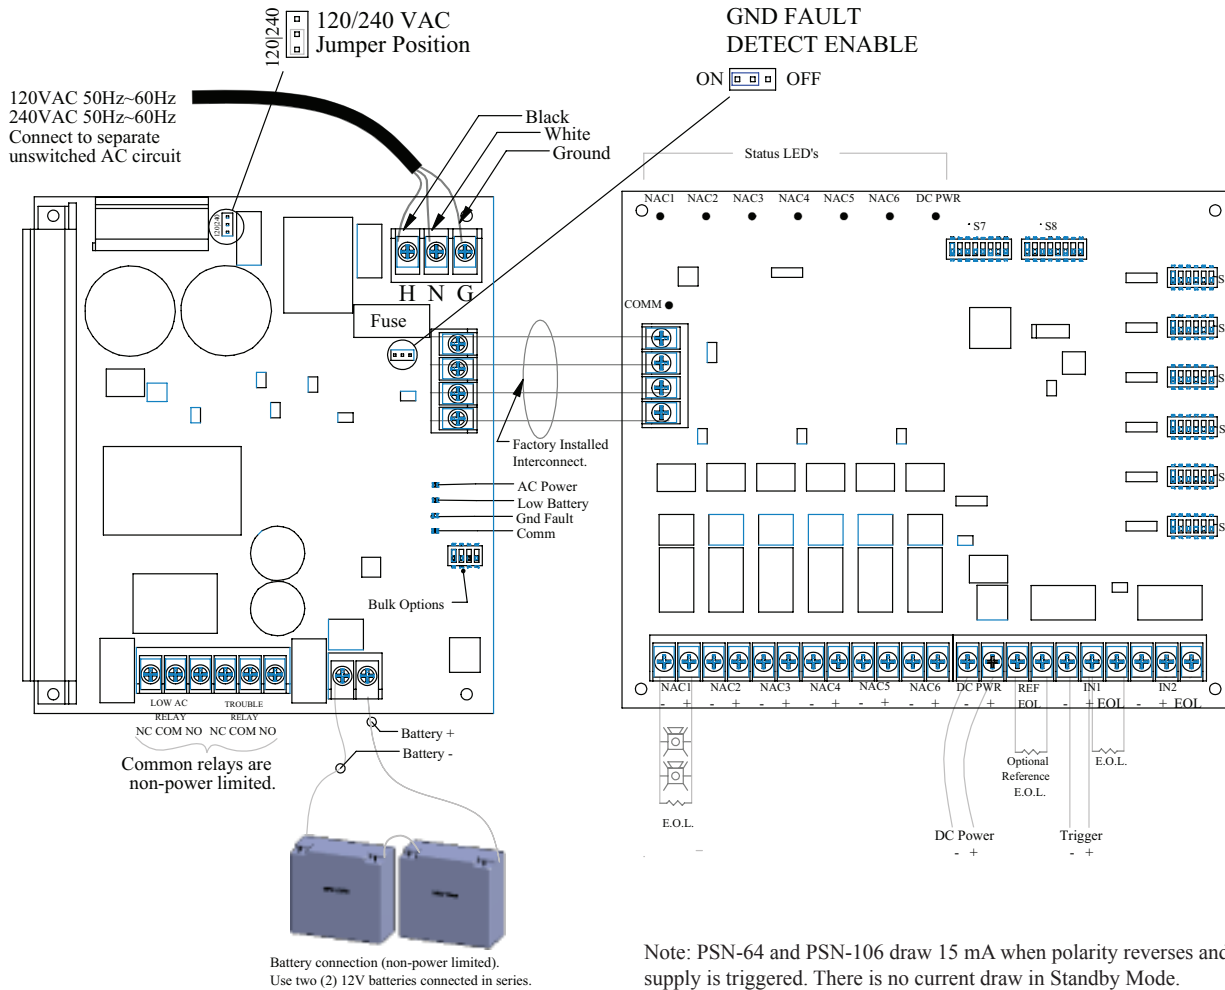

Engineering Specification

The contractor shall supply and install the Potter PSN power supply. The power supply shall operate on either 120 or 240 VAC input. The panel shall be capable of continuous load power without any degradation to the main supply or the distribution board. The cabinet shall be capable of housing up to 18 AH batteries and the panel shall be capable of charging up to 55 AH batteries in an external cabinet.

The panel shall have dip switches for simplistic configuration of the system and LEDs to provide visual indication to the installer of the status of the system. The dip switches shall allow for AC power delay selection, Class A/B operation per output, Door Holder Power options, constant auxiliary power, trigger input type, ANSI Code 3 Temporal Code, Pass Thru (input tracking), Potter/AMSECO® sync, Gentex® Sync, System Sensor® Sync or Wheelock® sync. The LEDs shall provide indication of communication between the power supply and distribution circuit


assemblies. The LEDs shall have distinct flash patterns to provide further indication of the troubles present. The panel shall have selectable Trouble Memory to provide the installer an indication that a past trouble existed on a circuit for diagnostic purposes.

Each output of the power supply shall be capable of 3 amps of continuous power without degradation over time. The power supply shall provide for multiple circuits of strobe appliances. The power supply shall synchronize the flashes of any of the above listed strobe appliances on a per circuit basis. Up to four different strobe circuits may be connected and all of the strobes shall flash in unison as required by UL 864. In addition to this Quadrasync feature, the panel shall allow any of the four above mentioned sync patterns as an input and pass this signal through and synchronize the outputs to match the input flash pattern.

Recessed Mount
with Face Flange



Surface Mount



High Security Industrial/Government Key Box



The number one high-security KNOX-BOX[®] is used for most commercial applications including businesses, schools, government and public buildings, community associations and apartment complexes. The 3200 Series KNOX-BOX holds keys, access cards and other small items necessary for emergency access.


The hinged-door 3200 Series KNOX-BOX is more convenient than the lift-off door version because it allows single-handed operation and opened or closed, it's all one unit.

Features and Benefits


- Holds up to 10 keys and access cards in interior compartment
- Ensures high security. Box and lock are UL[®] Listed
- Includes a Knox-Coat[®] proprietary finishing process that protects Knox products up to four times better than standard powder coat
- Resists moist conditions with a weather resistant door gasket
- Hinged door allows single-handed operation
- Colors: Black, Dark Bronze or Aluminum
- Weight: Surface mount - 8 lbs.
Recessed mount - 9 lbs.

Options

- Alarm tamper switches (UL Listed)
- Recessed Mounting Kit (RMK) for recessed models only
- Inside switch for use on electrical doors, gates and other electrical equipment

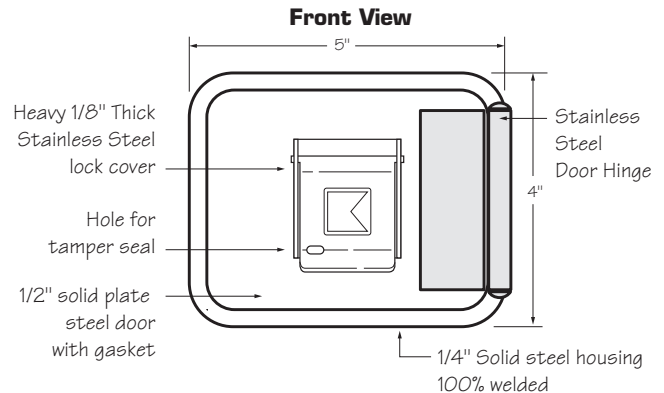

3200 Surface Mount

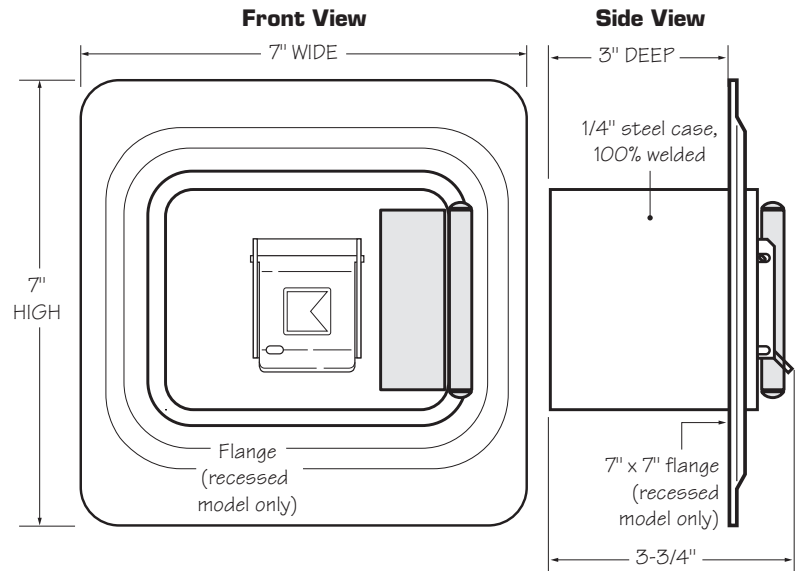

3200 Recessed Mount

Ordering Specifications

To insure procurement and delivery of the 3200 Series KNOX-BOX, it is suggested that the following specification paragraph be used:

KNOX-BOX surface/recessed mount with hinged door, with/without UL Listed tamper switches. 1/4" plate steel housing, 1/2" thick steel door with interior gasket seal and stainless steel door hinge. Box and lock UL Listed. Lock has 1/8" thick stainless steel dust cover with tamper seal mounting capability.

Exterior Dimensions: Surface mount body- 4"H x 5"W x 3-3/4"D
Recessed mount flange- 7"H x 7"W

Lock: UL Listed. Double-action rotating tumblers and hardened steel pins accessed by a biased cut key.


Finish: Knox-Coat[®] proprietary finishing process

Colors: Black, Dark Bronze or Aluminum

P/N: 3200 Series KNOX-BOX (mfr's cat. ID)

Mfr's Name: **KNOX COMPANY**

**Suggested minimum mounting height
6 feet above ground**

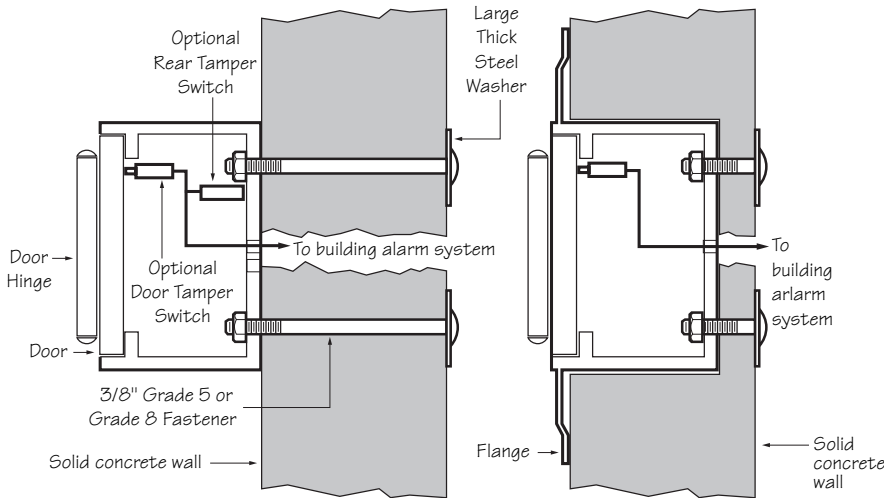

**3200 Series Hinged Door
Surface Mount**

**3200 Series Hinged Door
Recess Mount**

Recessed Mounting Kit

The 3200 Recessed Mounting Kit (RMK) is used for recessed models only. It contains a shell housing and mounting hardware to be cast-in-place in new concrete or masonry construction. After construction is completed, the KNOX-BOX mounts inside the RMK. The RMK may only be used in new concrete or masonry construction.

Installation In Cast Concrete


The optional Recessed Mounting Kit is for use in new concrete or masonry construction only. The kit includes a shell housing and mounting hardware to be cast-in-place. The KNOX-BOX is mounted into the shell housing after construction is completed.

Dimensions


Rough-in Dimensions: 6-1/2"H x 6-1/2"W x 5"D

IMPORTANT: Care should be taken to insure that the front of the RMK shell housing, including the cover plate and screw heads, is flush with the finish wall. The RMK must be plumbed to insure vertical alignment of the vault.

**Recessed Mounting Using
Recessed Mounting Kit (RMK)**

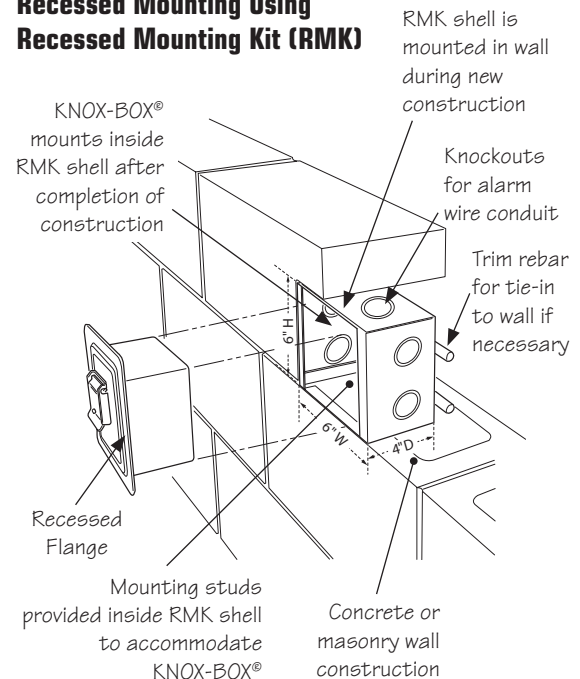

Reviewed for Code Compliance
Permitting and Inspections
Department
Approved 03/17/2020

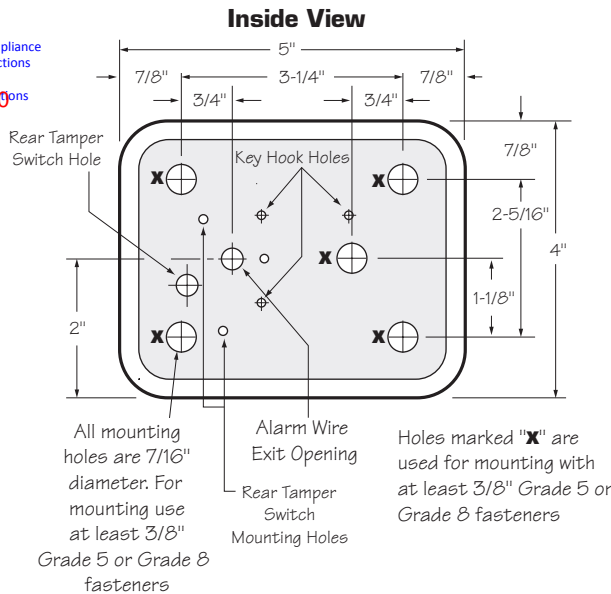

Attention: KNOX-BOX® is a very strong device that MUST be mounted properly to ensure maximum security and resist physical attack.

Knox® Rapid Entry System

The Knox Company manufactures a complete line of high security products including Knox-Box key boxes, key vaults, cabinets, key switches, padlocks, locking FDC caps, plugs and electronic master key security systems. For more information or technical assistance, please call Customer Service at 1-800-552-5669.



Features

- Terminals Marked with Polarity to assist with installation
- Duplicate terminals for in and out SLC wiring
- Terminals accept 22 to 12 AWG wire sizes
- Installs on single gang, double gang, octagon or 4” square box
- Locking tab prevents unauthorized detector removal
- Product includes 5 year warranty



Application

The Potter PAD100-6DB and PAD100-4DB detector bases are used to install Potter’s addressable smoke and heat detectors. The PAD100-6DB will mount on a single gang, double gang, octagon or 4” square electrical box.

Description

The PAD100-6DB and PAD100-4DB are low-profile, surface mount bases used with Potter’s addressable detectors. The base uses screw-clamp terminals that accept wire ranging from 22 to 14 AWG. When installed on recessed electrical boxes the PAD100-6DB is wide enough to completely cover the back box and the immediate surrounding area. The base is equipped with a locking tab to deter unauthorized removal of the attached detector.

Technical Specifications

Mounting Options	Single gang, double gang, octagon, and 4” square box
Terminals	Screw-Clamp Type
Wire Gauge	22 to 12 AWG
Dimensions	Diameter: 6.3 in (166 mm) Height 0.72 in (18 mm)
Shipping Weight	87g (3.07 oz)
Material	Durable Plastic




Locking Feature

The PAD100-6DB and PAD100-4DB include a locking feature that prevents removal of the detector without using a tool.


1. To eliminate this feature, break off the locking tab (refer to Figure 1), and then install the detector.

Fig. 1

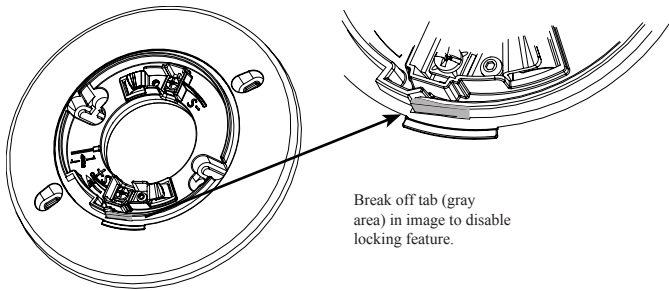


2. To remove the detector from the base when the locking feature has been enabled, insert a small screw driver into the slot on the base to push the plastic tab while simultaneously turning the detector head counter-clockwise.

Fig. 2

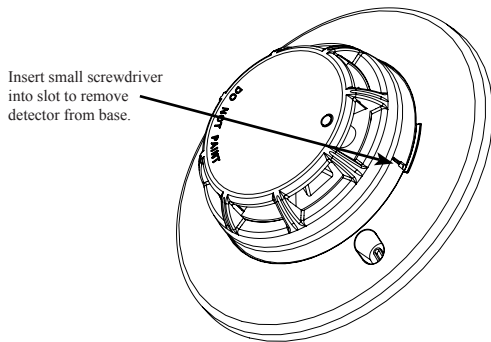

Wiring Diagram

Fig. 3

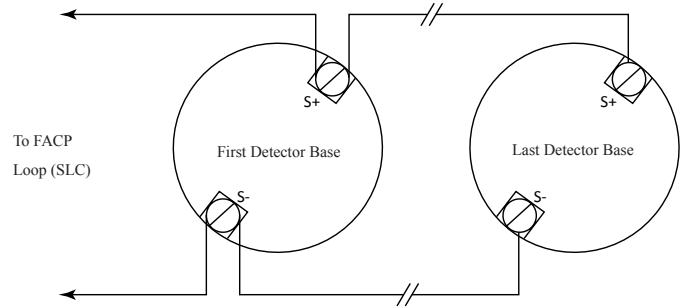

Ordering Information

Model	Description	Stock No.
PAD100-6DB	6" Sensor Base	3992732
PAD100-4DB	4" Sensor Base	3992731

Features

- Supervised Duct Detector Test Switch
- Active and Pilot LED indicators
- Key matches the fire alarm control panels
- Compatible with PAD100-DUCTR Duct Detector
- Mounts in a single gang box
- All wiring terminals accept 22 to 12 AWG
- Product includes a 5 year warranty



Description

The PAD100-DRTS module does not require an SLC loop address. The PAD100-DRTS provides a supervised remote test switch for the PAD100-DUCTR duct detector. Active and Pilot LEDs provide status of the PAD100-DUCTR detector. Keyed switch allows remote testing of the PAD100-DUCTR duct detector.

Application


The PAD100-DRTS is compatible with Potter's PAD100-DUCTR Duct detector. It installs on a single gang box.

Technical Specifications

Operating Voltage	24.0V
Max Standby Current	10mA
Max Alarm Current	15mA
Environmental Limitations	32°F - 120°F (0° - 49°C) Indoor Only
Operating Humidity Range	0 to 93% (non-condensing)
Max no. of Modules Per PAD100-DUCTR	1 unit
Dimensions	4.75" (187mm) H x 2.75" (108mm)W x 1" (40mm)D
Mounting Options	Single gang box or Potter P32-BB/DBB
Shipping Weight	0.65 lbs


Installation Using Compatible Electrical Box

Fig 1

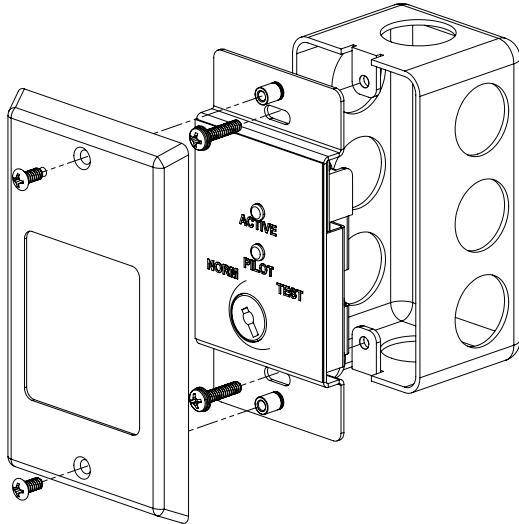

PAD100-DRTS Back View and Wiring

Fig 2

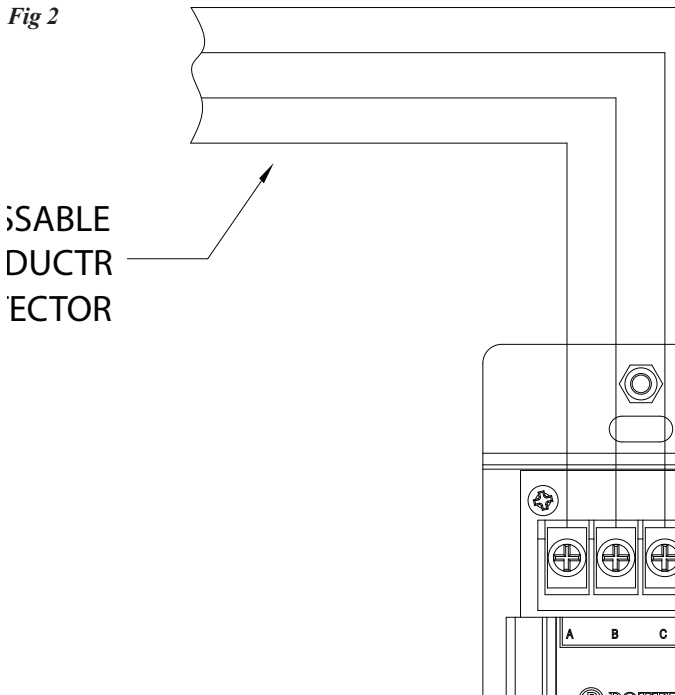

Ordering Information

Model	Description	Stock No.
PAD100-DRTS	Duct Remote Test Switch	3992711



Sequence of Operations

	Audio/visual activation at FACP	Activate audible/visual signal at FACP & Annunciator	Device Description at FACP	Log event in system history	Silence of audible devices including FACP & annunciator	Event acknowledgement	Reset of all system functions and all visual devices	Remote transmission to Central Station A=alarm; T=trouble; S=Supervisory; L = log only	Remote indicator
Manual Pull Station at FACP	X	X	X	X				A	
Smoke detector at FACP	X	X	X	X				A	
Sprinkler flow or pressure switches	X	X	X	X				A	
Sprinkler Tamper, low temp, or low air		X	X	X				S	
FACP/annunciator silence button		X	X	X	X			L	
FACP/annunciator acknowledge button		X	X	X		X			
FACP/annunciator reset button		X	X	X			X	L	
Removal of any device		X	X	X				T	
Ground fault		X	X	X				T	
System wiring "open"		X	X	X				T	
AC Power loss		X	X	X				T	
Secondary power loss		X	X	X				T	
Telephone line loss		X	X	X				T	
Voice evacuation panel	X	X	X	X	X	X		T	
HAL Booth Alarm	X	X	X	X				A	
Hal Booth Trouble		X	X	X				T	
CO Alarm	X	X	X	X				S	X

Temporal 4 audible activation



**PSN-64
Battery & Voltage Drop
Calculations**

Project Name: NOVA Standby Hours: 24
 Alarm Mins: 5
 Installed By: AAA ENERGY SERVICES Batt Efficiency %: 85%
 Designed By: PRO PRO
 Date: NAC Source Voltage: 20.4

Model #: PSN-64

Max Panel Current (amps): 6

Panel ID:

Location: NOVA ELECTRICAL ROOM

User assumes all responsibility to ensure the quantities and current draw values in this worksheet are accurate prior to submittal.

Qty	Panel Part #	Description	Standby (amps)		Alarm (amps)	
			Each	Total	Each	Total
1	PSN-64	NAC Power Expander	0.075	0.075	0.075	0.075
			Panel Standby:	0.075	Panel Alarm:	0.075

NAC Circuits (See NAC Configuration below)			Standby (amps)		Alarm (amps)	
Ckt	Use	Description	Total		Total	
1	Notification	NAC1	0.00000		1.09600	
2	Notification	CO SOUNDER BASE	0.00500		0.10000	
3	Unused	Spare	0.00000		0.00000	
4	Unused	Spare	0.00000		0.00000	
			NAC Standby:	0.00500	NAC Alarm:	1.19600

Battery Calculation Summary			
		Standby (amps)	Alarm (amps)
Panel Current:		0.07500	0.07500
NAC Circuit Current:		0.00500	1.19600
Total Standby:		0.080000	Total Alarm:
Standby Hours:		24	Alarm Mins:
AH Required:		1.92	AH Required:
Total Combined Standby & Alarm AmpHours Required:		2.03	
		Efficiency Factor:	
		85%	
Required Battery AmpHours:		2.39	
Battery AmpHours Provided:		7AH	



NAC Circuit Configuration & Voltage Drop (cont'd)

NOVA

NAC 3 MAX Circuit Current (amps): 3 Source Voltage Used (VDC): 20.4

Usage: Description:

Wire Type	Ohms/1000ft	Length 1-Way	Actual Ohms	Max Load (amps)	Volts @ EOL	Min Volts Req'd
#14 Solid	2.5		0.000	0.000	20.40	16

Qty	Lookup Type	Circuit Devices Desc	Standby (amps)		Alarm (amps)	
			Each	Total	Each	Total
		User can add devices on the fly to these bottom 5 rows (No lookup function)				
Total Standby:				0.00000	Total Alarm:	0.00000

NAC 4 MAX Circuit Current (amps): 3 Source Voltage Used (VDC): 20.4

Usage: Description:

Wire Type	Ohms/1000ft	Length 1-Way	Actual Ohms	Max Load (amps)	Volts @ EOL	Min Volts Req'd
#14 Solid	2.5		0.000	0.000	20.40	16

Qty	Lookup Type	Circuit Devices Desc	Standby (amps)		Alarm (amps)	
			Each	Total	Each	Total
		User can add devices on the fly to these bottom 5 rows (No lookup function)				
Total Standby:				0.00000	Total Alarm:	0.00000

