


|   |   | 132 BRENTWOOD STREET<br>PORTLAND, ME 04103<br>207.773.4880<br>www.resurgenceengineering.com |
|---|---|---|
|   | NEW 1/2" CDX PLYWOOD SHEATHING  |   |
|   | —— NEW 2 X 4 WALL FRAMING @ 24" O.C.  |   |
|   | EXISTING WALL FRAMING   | OF ANI  |
|   | —— NEW (2) 2 X 4 ACQ SILL   | HODSON III  |
|   | —— 5/8" X 12" GALV. FOUNDATION BOLTS @ 48"± O.C.  | No. 9246  |
|   |   | ENGINEER OF RECORD  |
|   | <ul> <li>LAYER OF REFLECTIVE ROLL INSULATION</li> <li>TO ISOLATE CONCRETE FROM EXISTING BRICKWORK</li> <li>#5 REINFORCING BARS AT 12" O.C</li> <li>HORIZONTALLY AND VERTICALLY</li> </ul> |   |
| SA-LAM JOISTS AT 16" O.C.<br>2X6 P.T. SEAT. | 2" DIA. PVC SLEEVE AND PIPE<br>THROUGH WALL INTO SUMP (BEYOND)  |   |
| 2-0" MIN                                    | 2" 4,000psi CONCRETE SLAB ON GRADE<br>WITH 6 X 6 WELDED WIRE MESH<br>PROVIDE 6" SLOPE FRONT TO BACK TO SUMP   | at  |
|   | 2" RIGID INSULATION   | Φ <u></u>   |
|   | 15 MIL TAPED VAPOR BARRIER  | ш <b>П</b><br>р <b>с</b>  |
|   | —— HEIGHT T.B.D.  | O a   |
|   | COMPACTED FILL.   | Block<br>Dock<br>Irds<br>De   |
|   | NEW 16" WIDE 4,000psi CONCRETE FOOTING<br>CAST AGAINST EXISTING RUBBLE FOUNDATION<br>WITH (6) #5 BARS CONTINUOUS.   | Main F<br><b>d t O n</b><br>d , Mair  |
|   | —— EXISTING RUBBLE FOUNDATION WALL (ASSUMED)  | he<br>han<br>lan  |
|   |   | on of t<br><b>a s h i</b><br>Jonat<br>Port  |

NEW 1/2" CDX PLYWOOD SHEATHING

- NEW 2 X 8 WALL FRAMING @ 24" O.C.
- NEW (2) 2 X 8 ACQ SILL .
- 5/8" X 12" GALV. FOUNDATION BOLTS @ 48"± O.C.
- 4" 4,000psi CONCRETE SLAB ON GRADE WITH #4 BARS @ 36" O.C. EACH WAY AND 6 X 6 WELDED WIRE MESH
- 15 MIL TAPED VAPOR BARRIER
- NEW 8" THICK 4,000psi CONCRETE GRADE BEAM CAST ON EXISTING RUBBLE FOUNDATION WITH #5 BARS @ 12" O.C HORIZONTALLY AND VERTICALLY
- COMPACTED FILL
- 2" RIGID INSULATION TYP.
- EXISTING RUBBLE FOUNDATION WALL (ASSUMED)

- UNDISTURBED SUBGRADE

## PERMIT SET

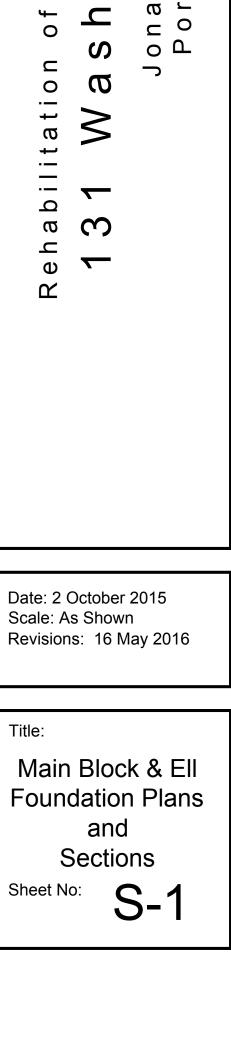

RESURGENCE

ENGINEERING & PRESERVATION, INC