



# AL602ULADA, AL802ULADA, AL1002ULADA NAC Power Extenders

Rev. AL602/802/1002ULADA- L20E

## Overview



- The AL602ULADA, AL802ULADA and AL1002ULADA are extremely cost effective voltage regulated remote NAC Power Extenders. They may be connected to any 12 or 24 volt Fire Alarm Control Panel (FACP). Primary applications include Notification Appliance Circuit (NAC) expansion (supports ADA requirements) and will provide auxiliary power to support system accessories.

### AL602ULADA

- 24VDC or 12VDC rated @ 6.5 amp max.
- Two (2) Class A or four (4) Class B outputs.

### AL602ULADAJ

- Larger enclosure.

### AL802ULADA

- 24VDC or 12VDC rated @ 8 amp max.
- Two (2) Class A or four (4) Class B outputs.

### AL802ULADAJ

- Larger enclosure.

### AL1002ULADA

- 24VDC rated @ 10 amp max.
- Two (2) Class A or four (4) Class B outputs.

### AL1002ULADAJ

- Larger enclosure.

## Specifications

- Two (2) Class A or two (2) Class B FACP inputs.
- Two (2) NC dry contact trigger inputs (AL802ULADA and AL1002ULADA only)
- Two (2) Class A or four (4) Class B indicating circuits.
- Two (2) Class B outputs may be paralleled for more power on an indicating circuit.
- One (1) Aux. Power Output @ 1 amp supply current (w/battery back up).
- Signal Circuit Trouble Memory - facilitates quickly locating intermittent system trouble and eliminates costly and unnecessary service calls. LED's indicate a prior fault (short, open, ground) has occurred on one or more signaling circuit outputs.
- 2-wire Horn/Strobe Sync mode allows audible notification appliances (Horns) to be silenced while visual notification appliances (Strobes) continue to operate.
- Horn/Strobe sync protocols include: Gentex®, System Sensor®, Faraday, Amseco.
- Temporal Code 3 Mode.
- Steady Mode.
- Input to Output Follower Mode (maintains synchronization of notification appliance circuits).
- March Time.
- Compatible with 24VDC or 12VDC fire panels.
- Common trouble inputs and outputs.
- Ground fault detection.
- Input 115VAC.
- AC fail supervision (form "C" contacts).
- Low battery supervision (form "C" contacts).
- Battery presence supervision (form "C" contacts).
- Power supply, logic board, red enclosure, cam lock, transformer & battery leads.
- Enclosure:
  - Combination knockouts re 1/2" and 3/4"
  - Accommodates up to two (2) 12VDC/12AH batteries.

## Agency Approvals



UL Listed Control Units and Accessories for Fire Alarm Systems (UL 864),  
UL Listed Standard for Safety for Fire Protective Signaling Systems (UL 1481).



California State Fire Marshal Approved.




ME A NYC Department of Buildings Approved.



Factory Mutual Approved.

## Enclosure Dimensions

AL602ULADA, AL802ULADA and AL1002ULADA: 15.5"H x 12"W x 4.5"D

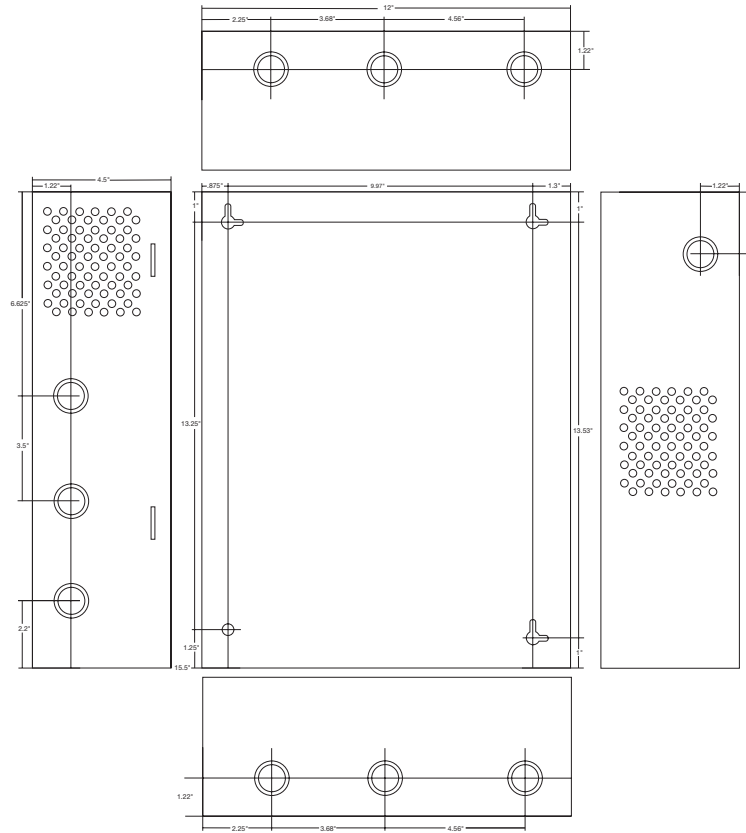

AL602ULADAJ, AL802ULADAJ and AL1002ULADAJ: 18"H x 14.5"W x 4.625"D

