

© 2016 RYAN SENATORE ARCHITECTURE

93 WASHINGTON AVE.
PORTLAND, MAINE



RYAN SENATORE ARCHITECTURE
565 CONGRESS STREET
PORTLAND, MAINE 04101
207-650-6414
senatorearchitecture.com

CONSULTANTS:

REVISIONS:

DATE: JULY 26, 2016

PROJECT No. 1626


DRAWN BY: RJS / RRT

CHECKED BY: RJS

SCALE: AS NOTED

SHEET TITLE:
WINDOW SCHEDULE

A7-1

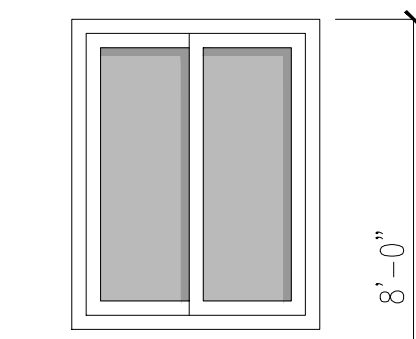

(A) OPERABLE STOREFRONT (SLIDING)

WINDOW SCHEDULE LEGEND	
T = TEMPERED GLASS	O/F S = OPERABLE / FIXED STOREFRONT
FG = FIBERGLASS	
AL = ALUMINUM	
DH = DOUBLE HUNG	
AW = AWNING	
LV = LOUVER	
F = FIXED	
GL = GLIDER	
OC = OPERABLE CASEMENT	

1 WINDOW TYPES
1/4" = 1'-0"

WINDOW SCHEDULE

KEY	ACTION	ROUGH OPENING (WxH) VIF	R.O. HEAD HEIGHT FROM SUB FLOOR	DETAILS			MATERIAL	FINISH	REMARKS
				HEAD	JAMB	SILL			
A	GL	4'-0" X 5'-0"	-	-	-	-	-	-	KAWNEER - OptIQ ULTRA THERMAL WINDOWS - AA 5450 SERIES - GLIDING WINDOW

WINDOW NOTES:

- COORDINATE AND ADJUST ROUGH OPENING DIMENSIONS TO ACCOMMODATE SILL PAN FLASHING SYSTEM
- ALL WINDOW UNITS AND MULTI-WINDOW UNIT COMBINATIONS TO MEET OR EXCEED DP-50 RATINGS FOR BOTH STRUCTURAL AND WATER
- FULL SCREENS ALL OPENINGS
- ALL GLAZING LOCATED WITHIN 18" OF FINISHED FLOOR TO BE TEMPERED GLASS
- ALL EXTERIOR GLAZING TO BE INSULATED
- FRAME ALL OPENINGS WITH ELEVATIONS
- SEAL WINDOW TO ROUGH OPENING WITH LOW EXPANDING FOAMINSULATION - SEE DETAILS

STOREFRONT INFORMATION

- ALL STOREFRONT TO BE THERMALLY BROKEN WITH INSULATED GLAZING UNITS WITH LOW-E COATING ARGON FILLED UNITS
- TEMPER ALL GLASS AS REQUIRED BY BUILDING CODE
- PROVIDE SUB SILLS WITH DRAINED PANS WITH END AND BACK DAMS
- FOR STOREFRONT FRAME GEOMETRY AND ARRANGEMENTS SEE EXTERIOR BUILDING ELEVATIONS
- G.C. TO FIELD MEASURE ALL STOREFRONT UNITS PRIOR TO ORDER