FIRE EXTINGUISHER AT

EACH FLOOR

-1/2 HOUR SEPARATION

AT STAIRWELL.

SEE 3/A3.1

FIRST FLOOR

EXIT FROM SECOND & THIRD FLOOR

BEDROOM


NOTE:

30 MINUTE SEPARATION AT CEILING

BETWEEN UNITS. SEE 5/A3.1.

SEALING/STOPPING REQUIRED.

FIRE BLOCKING & FIRE

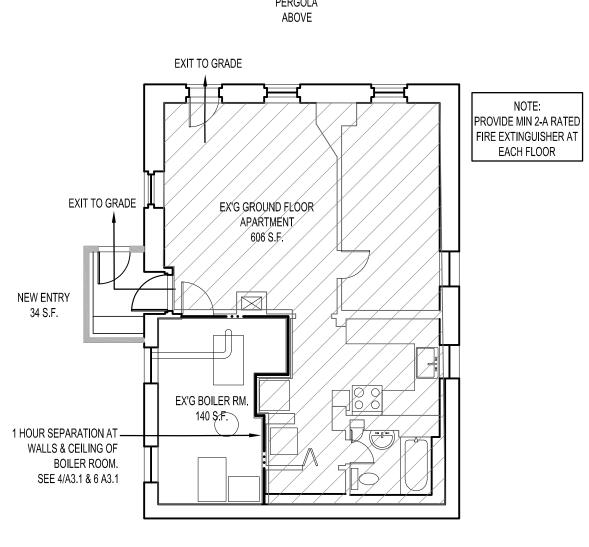

1 HR. ASSEMBLY

·—·— 1/2 HR. ASSEMBLY

NEW PARTITION

EXISTING TO REMAIN

PROJECT SUMMARY

RENOVATION OF OWNER'S SECOND AND THIRD FLOOR DWELLING UNIT IN EXISTING THREE UNIT APARTMENT BUILDING. ALSO INCLUDED IN ARE MINOR IMPROVEMENTS TO FIRST FLOOR UNIT GROUND FLOOR UNIT TO REMAIN AS EXISTING. SCOPE OF RENOVATION TO OWNER'S UNIT INCLUDES COMPLETE DEMOLITION AND REPLACEMENT OF INTERIOR PARTITIONS AND SYSTEMS, ADDITIONAL WINDOWS ON 2 ELEVATIONS, AND ADDITION OF SHED DORMERS. ALSO INCLUDED IN THE PROJECT IS A TWO LEVEL ELEVATED DECK REPLACEMENT OF EXISTING ENTRIES ON THE GROUND AND FIRST FLOOR APARTMENTS. PERMIT #201701994 FOR INTERIOR NON-STRUCTURAL DEMOLITION ISSUED JANUARY 03, 2018.

AREAS

GROUND FLOOR NET: FIRST FLOOR NET: SECOND FLOOR NET: THIRD FLOOR NET:	750 S.F. 900 S.F. 890 S.F. 850 S.F.
TOTAL NET BUILDING AREA	3,390 S.F.

ROVIDE MIN 2-A RATED

FIRE EXTINGUISHER AT

EACH FLOOR

SECOND FLOOR

GROUND FLOOR

LIFE SAFETY PLANS

BLDG FOOTPRINT: 990 S.F. (EXCLUDING DECK)

LOT AREA: 5330 S.F.

CODE SUMMARY

ZONING

ZONE: R-6, RESIDENTIAL MULTIFAMILY 14-136(a)2USE: a. PARKING PER SECTION 20

b. OUTSIDE UNENCLOSED STAIRWAYS PROHIBITED c. BASEMENT UNIT PERMITTED w/ DIRECT ACCESS.

FRONT=5' OR AVERAGE OF ADJACENT

REAR=10' (ACCESSORY STRUCTURES <144 S.F.=5') SIDE=5' (REDUCED TO 0' PROVIDED CUMULATIVE TOTAL NOT <10'. PERMANENT 5' MAINTENANCE

EASEMENT REQ'D)

LOT COVERAGE: 60% MAX. OPEN SPACE: 20% (LANDSCAPED)

SETBACKS:

PARKING: 3 EXISTING TO REMAIN. NO ADDITIONAL UNITS

CREATED.

IEBC 2009, IBC 2009, NFPA-101 2009, IECC 2009

WORK CLASSIFICATION: IEBC: ALTERATION LEVEL 3 (2ND & 3RD FLOORS) NFPA-101: BUILDING REHABILITATION

V-B, COMBUSTIBLE UNPROTECTED CONST. TYPE: CHANGE OF USE: NO

USE GROUP: R=2 (APARTMENT) DWELLING SEPARATION: 1 HOÙR (wľ SPRIÑKLERS) SMOKE DETECTORS: PHOTOELÈCTRIC, INTERCONNECTED, HARDWIRED

w/ BATTERY BACK-UP REQUIRED FIRE ALARM: NOT REQUIRED.

SPRINKLERS: REQUIRED THROUGHOUT (NFPA-R13 SPRINKLERS ALLOWED)

ALLOWED ON GROUND AND FIRST FLOORS WITH SINGLE EXIT: EXIT WITH DIRECT ACCESS TO GRADE. ALLOWED


> ON 2ND & 3RD FLOORS (SINGLE LIVING UNIT) WITH EXIT ACCESS TRAVEL DISTANCE <125' (PER IBC 2012 §1021.1 EXC. #4)

EXIT ENCLOSURE: STAIRWAY SERVING SINGLÉ R-2 UNIT NOT REQUIRED TO BE ENCLOSED

(§1022.1 EXC. #3)

R-VALUES PROVIDED: WALLS R-20(ROOF R-49 WINDOW VALUES: U-FACTOR 0.18, SHOC 0.51, VLT .60

PROJECT SUMMARY



04108 LC Rachel Conly Design LL 26 Sterling Street Peaks Island, Maine 04 207.766.5625 www.rachelconlydesign.c

2018.04.16 .01



Ave 101 04 Cumberland Renovations to ш \geq Portland, I Phase I 123

SUMMARY LIFE SAFETY PLAN **PROJECT**