


□	WOOD POST
(X)	NUMBER OF WOOD STUDS IN POST BELOW
←	JOIST BEARING
↔	CONTINUOUS JOIST WITH INTERMEDIATE BEARING
⊥	FLUSH FRAMED JOIST BEARING WITH HANGER
▨	WOOD STUD BEARING WALL BELOW
"X" T	NUMBER OF TRIM STUDS UNDER HEADER
"X" K	NUMBER OF KING STUDS ADJACENT TO HEADER

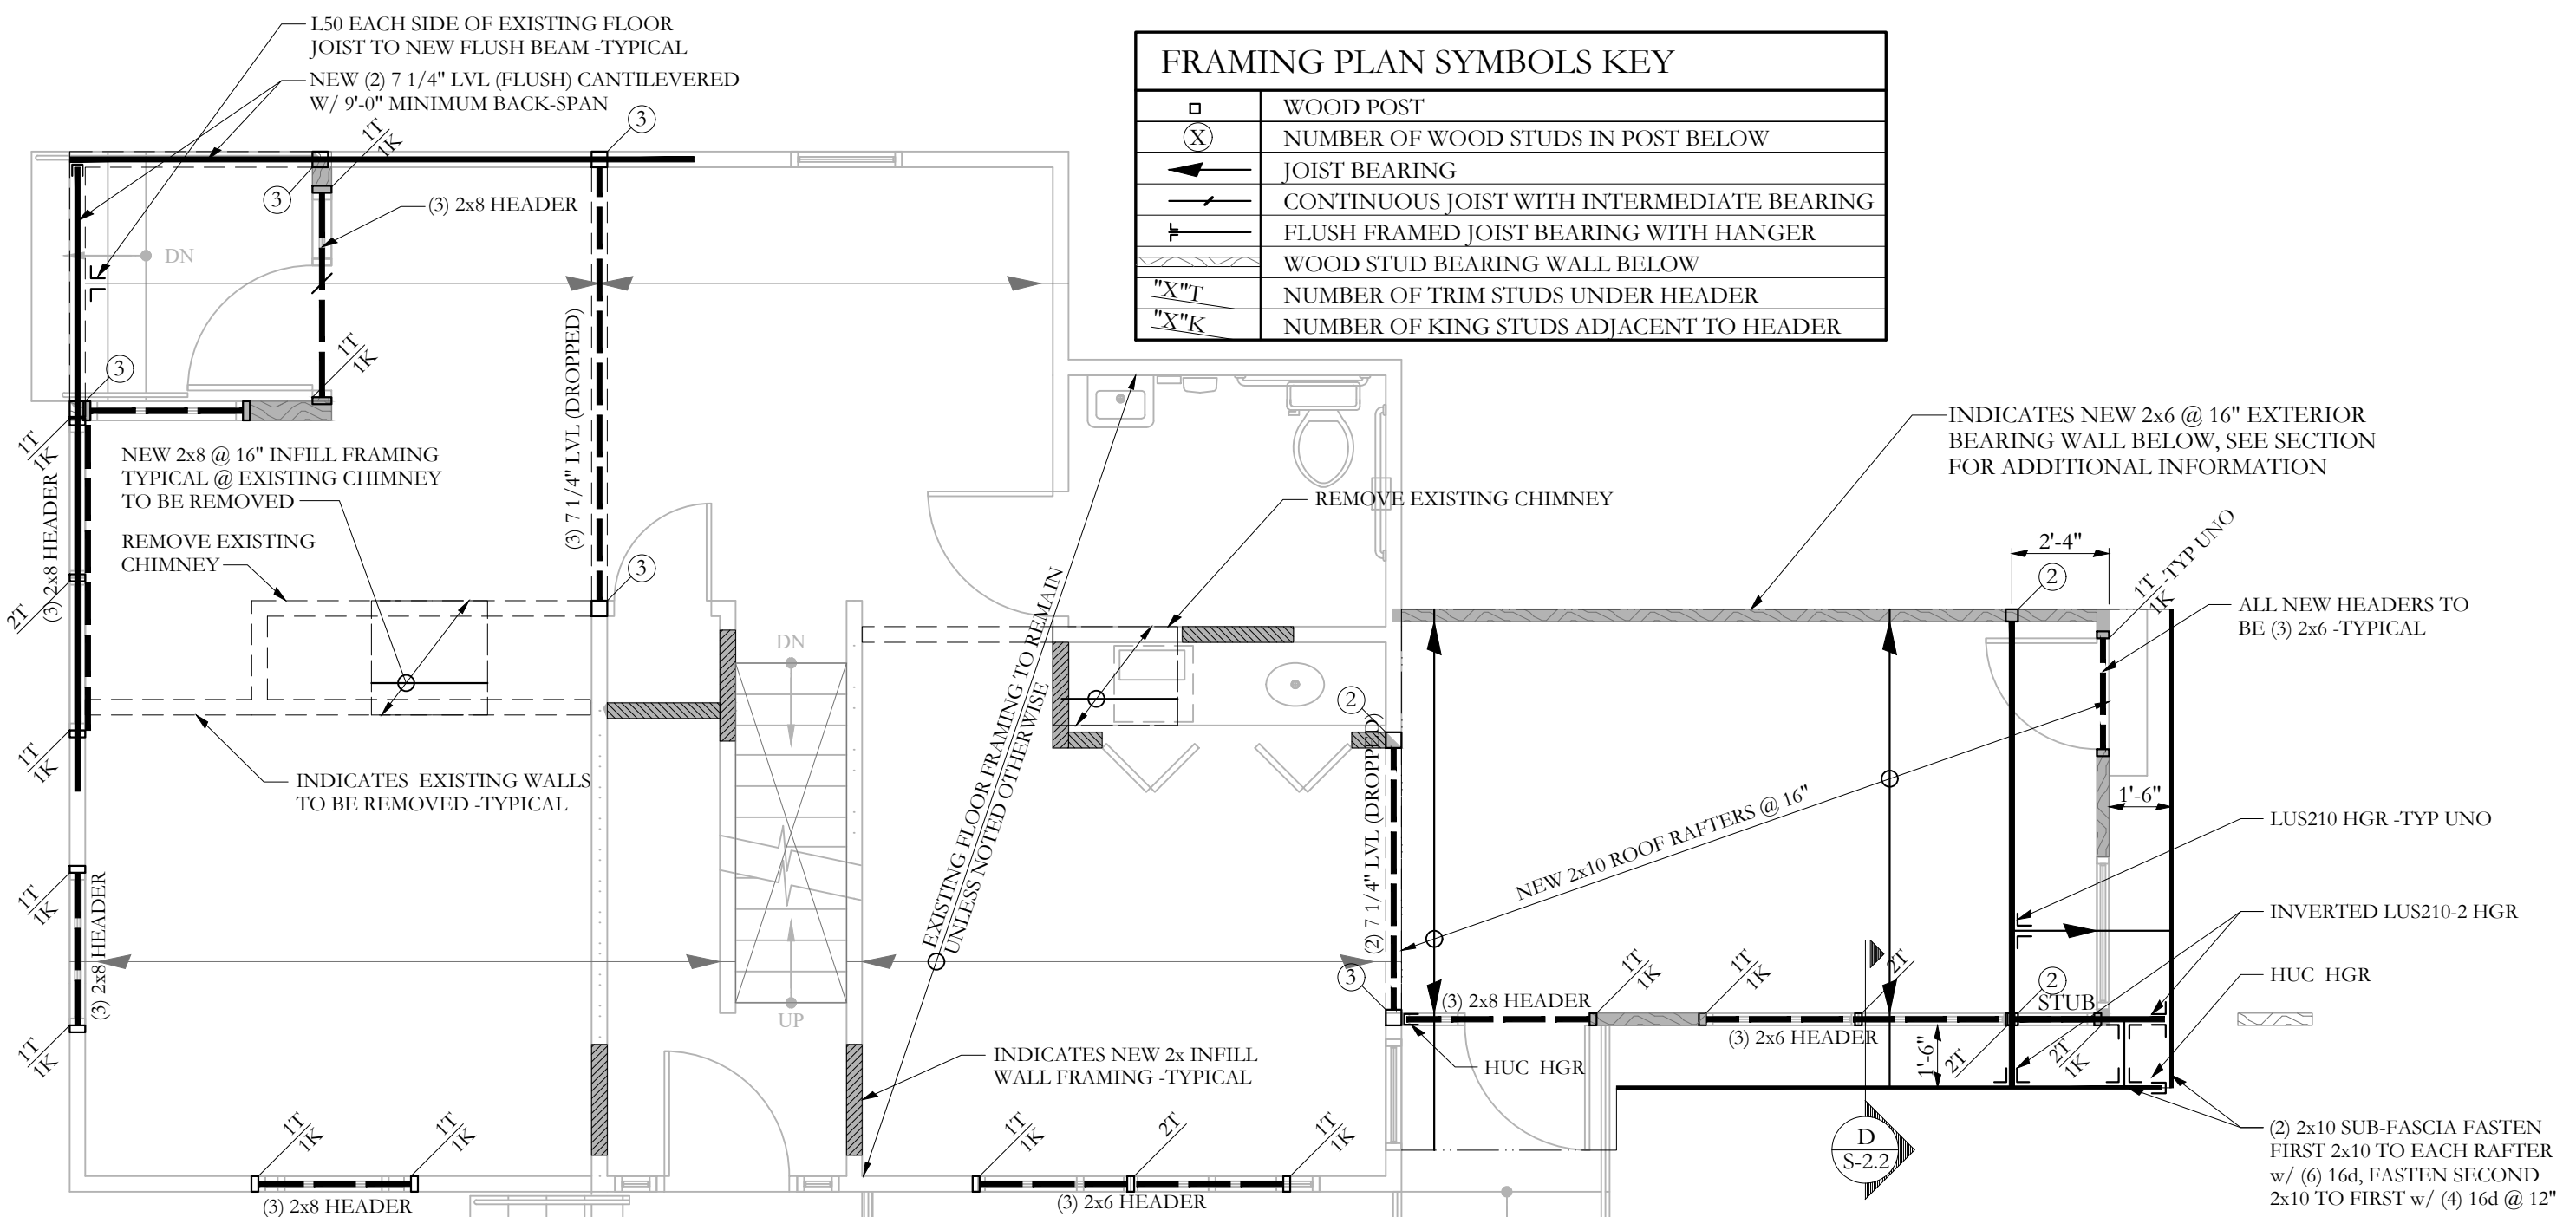

SECOND FLOOR/ LOW ROOF FRAMING PLAN

SCALE 1/4"=1'-0"

NOTES:

- SEE SHEET S-1.0 FOR GENERAL STRUCTURAL NOTES
- ALL WOOD COLUMNS IN 2x6 WALLS SHALL BE 3-2x6 AND IN 2x4 WALLS SHALL BE 3-2x4 UNLESS NOTED OTHERWISE ON PLANS
- ALL BEAMS ARE FLUSH, UNO
- ALL HEADERS IN 2x BEARING WALLS ARE 3-2x6, UNO
- FLOOR SHEATHING TO BE 3/4" T+G, SEE GENERAL NOTES FOR ADDITIONAL INFORMATION -TYP
- ROOF SHEATHING SHALL BE 5/8" OSB, SEE GENERAL NOTES FOR ADDITIONAL INFO
- ALL ROOF RAFTERS TO BE 2x10 @ 16" -TYP



77 Oak Street
Portland, ME, 04101
p. 207-774-4614
f. 866-793-7835
www.structuralintegrity.com

BUILD WITH CONFIDENCE
©2015 Structural Integrity Consulting Engineers, Inc.