

| WINDOW SCHEDULE, FLOORS 2-4 (CONDO UNITS) | | | | | | |
|---|----------------|------------|----------|------------------------|---|---|
| ID | Description | # of | RO Width | RO Height | Bottom of RO (Sill) From T.O. Structure | Notes |
| W1 | Fixed | 16 | 2'-0" | 9'-0" | 0'-0" | |
| W1a | Fixed | 8 | 2'-0" | 9'-10 ^{3/4} " | 0'-0" | |
| W2 | Fixed | 6 | 3'-0" | 9'-0" | 0'-0" | |
| W2a | Fixed | 3 | 3'-0" | 9'-10 ^{3/4} " | 0'-0" | |
| W3 | Fixed | 16 | 4'-0" | 9'-0" | 0'-0" | |
| W3a | Fixed | 8 | 4'-0" | 9'-10 ^{3/4} " | 0'-0" | |
| W4 | Fixed | 2 | 5'-0" | 9'-0" | 0'-0" | |
| W4a | Fixed | 1 | 5'-0" | 9'-10 ^{3/4} " | 0'-0" | |
| W5 | Fixed + Awning | 42 | 2'-0" | 9'-0" | 0'-0" | |
| W5a | Fixed + Awning | 21 | 2'-0" | 9'-10 ^{3/4} " | 0'-0" | |
| W6 | Fixed + Awning | 2 | 3'-0" | 9'-0" | 0'-0" | |
| W6a | Fixed + Awning | 1 | 3'-0" | 9'-10 ^{3/4} " | 0'-0" | |
| W9 | Fixed | 1 | 3'-0" | 4'-0" | 3'-0" | Located in Subgrade. Viewing Window to Automated Car Parking System. No fire rating |
| | | 127 | | | | |

| WINDOW ELEVATIONS, FLOORS 2-4 AT CONDO UNITS, 1/4" = 1'-0" | | | | | | | | | | | | | |
|--|-------|-------|-------|-------|-------|-------|-------|-------|----------------|----------------|----------------|----------------|-------|
| ID | W1 | W1a | W2 | W2a | W3 | W3a | W4 | W4a | W5 | W5a | W6 | W6a | W9 |
| Elevation (Nominal Dims) | | | | | | | | | | | | | |
| Window Type | Fixed | Fixed | Fixed | Fixed | Fixed | Fixed | Fixed | Fixed | Fixed + Awning | Fixed + Awning | Fixed + Awning | Fixed + Awning | Fixed |

| WINDOW SCHEDULE, FLOOR 5 (UNIT 5A) | | | | | | |
|------------------------------------|----------------|------|----------|------------------------|---|-------|
| ID | Description | # of | RO Width | RO Height | Bottom of RO (Sill) From T.O. 5th Floor Structure | Notes |
| WP1 | Fixed | 1 | 2'-0" | 9'-10 ^{3/4} " | 0'-11" | |
| WP2 | Fixed | 4 | 3'-0" | 9'-0" | 2'-0" | |
| WP3 | Fixed + Awning | 12 | 3'-0" | 9'-0" | 2'-0" | |
| WP4 | Window Wall | 2 | 9'-0" | 10'-0" | 0'-11" | |
| WP5 | Window Wall | 1 | 12'-0" | 10'-0" | 0'-11" | |
| WP6 | Window Wall | 1 | 8'-4" | 10'-0" | 0'-11" | |
| WP7 | Window Wall | 1 | 9'-0" | 7'-8 ^{1/8} " | 3'-1 ^{1/8} " | |


| WINDOW TYPES, FLOOR 5 (UNIT 5A) 1/4" = 1'-0" | | | | | | | |
|--|-------|-------|----------------|-------------|-------------|-------------|-------------|
| ID | WP1 | WP2 | WP3 | WP4 | WP5 | WP6 | WP7 |
| Elevation (Nominal Dims) | | | | | | | |
| Window Type | Fixed | Fixed | Fixed + Awning | Window Wall | Window Wall | Window Wall | Window Wall |

- WINDOW GENERAL NOTES:**
- Windows Basis of Design is Quaker Modern Vu series in sizes and configurations as shown in Schedule with color to be Black on both interior and exterior. To be supplied by Pinnacle Window Solutions. Contact Chris Bailey chris@pinnaclewindowsolutions.net 207-588-6590 x12. See Project Specifications for additional information.
 - U-Value of fixed windows = 0.26 and U-Value of fixed windows = 0.39. For other IECC 2009 requirements refer to specifications.

| STOREFRONT DOOR AND WINDOW SCHEDULE | | | | | | |
|-------------------------------------|-------------------------------------|----------|-------------------------|-------------------------|---------------------|--|
| ID | Library Part Name | # of | RO Width | RO Height | Bottom of RO (Sill) | Notes |
| S1a | Storefront Sidelight, Transom 20 | 1 | 3'-4" | 11'-9 ^{3/4} " | 0'-0" | S1 series mullied together |
| S1b | Storefront Window with Transom 2 20 | 1 | 2'-5 ^{1/2} " | 10'-4" | 1'-6" | |
| S1c | Storefront Window with Transom 2 20 | 1 | 12'-11 ^{1/4} " | 10'-4" | 1'-6" | |
| S1d | Storefront Window with Transom 2 20 | 1 | 48'-2 ^{7/16} " | 10'-4" | 1'-6" | |
| S1e | Storefront Sidelight, Transom 20 | 1 | 3'-4" | 11'-9 ^{3/4} " | 0'-0" | |
| S2a | Storefront Sidelight, Transom 20 | 1 | 3'-0" | 7'-7 ^{3/4} " | 0'-0" | S2 series mullied together, Keypad Access (All Residents), ADA Automatic Operator System |
| S2b | Storefront Window with Transom 2 20 | 1 | 7'-0 ^{1/8} " | 9'-9 ^{3/8} " | 0'-10" | |
| S3 | Storefront Window with Transom 2 20 | 1 | 2'-0" | 11'-10 ^{1/4} " | 0'-0" | |
| | | 8 | | | | |

| STOREFRONT DOOR AND WINDOW ELEVATIONS, 1/8" = 1'-0" | | | | | | | | |
|---|------------------------------|------------------------------|--------------------------------|--------------------------------|------------------------------|-----------------------------|---|-------------------------------|
| ID | S1a | S1b | S1c | S1d | S1e | S2a | S2b | S3 |
| View from Opening Side | | | | | | | | |
| Nominal W x H Size | 3'-4"x11'-9 ^{3/4} " | 2'-5 ^{1/2} "x10'-4" | 12'-11 ^{1/4} "x10'-4" | 48'-2 ^{7/16} "x10'-4" | 3'-4"x11'-9 ^{3/4} " | 3'-0"x7'-7 ^{3/4} " | 7'-0 ^{1/8} "x9'-9 ^{3/8} " | 2'-0"x11'-10 ^{1/4} " |

- STOREFRONT GENERAL NOTES:**
- Storefront Basis of Design is Kawneer Trifab 4S1T with vertical SSG in sizes and configurations as shown in Schedule with color to be Black on both interior and exterior. See Project Specifications for additional information.
 - For U-Value of storefront system refer to specifications
 - For Visible Transmittance (VT) refer to specifications. Minimum to be at least 0.61 per IS-FBC zoning requirements

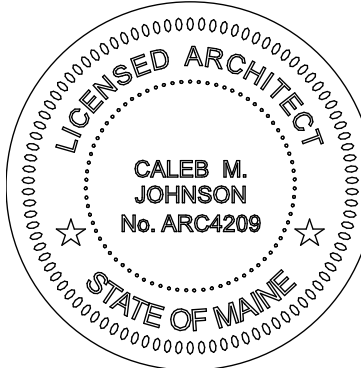

PERMIT SET