

MUNJOY HEIGHTS

79 WALNUT STREET

PORTLAND, MAINE

GENERAL NOTES:

1. THE CONTRACTOR SHALL CALL THE APPROPRIATE UTILITY COMPANIES AND DIG SAFE AT LEAST 4 DAYS PRIOR TO ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION FOR UTILITIES. OTHERWISE IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY THE LOCATION OF UNDERGROUND UTILITIES AND LOCATE ANY POTENTIAL CONFLICTS WITH THE APPROVED PLANS PRIOR TO CONSTRUCTION.
2. THE CONTRACTOR IS RESPONSIBLE FOR MAINTENANCE OF ALL EROSION CONTROL MEASURES SHOWN ON THE PLAN. IF DEEMED NECESSARY BY THE OWNER OR OWNER'S REPRESENTATIVE, ADDITIONAL EROSION CONTROL MEASURES SHALL BE INSTALLED AT NO ADDITIONAL COST TO THE OWNER.
3. THE CONTRACTOR SHALL PREPARE THEIR OWN MATERIAL SCHEDULE BASED ON THE PLANS AND FIELD VERIFICATION BY THE CONTRACTOR. ALL MATERIAL SCHEDULES SHOWN WITHIN THE PLAN SET ARE FOR GENERAL INFORMATION ONLY.
4. ALL CONSTRUCTION METHODS, TESTING AND MATERIALS SHALL CONFORM TO THE MAINE DEPARTMENT OF TRANSPORTATION SPECIFICATIONS, THE CITY OF PORTLAND AND SERVICING UTILITY REQUIREMENTS, IF ANY. IN CASES WHERE THESE CONFLICT THE MOST STRINGENT SPECIFICATION SHALL APPLY AT NO ADDITIONAL COST TO THE OWNER.
5. THE SITE CONTRACTOR SHALL MAINTAIN A SET OF DRAWINGS WHICH SHALL RECORD THE ACTUAL LOCATION, DIMENSIONS, ELEVATIONS, MATERIALS OF THEIR WORK, INDICATING THEREON ALL VARIATIONS FROM THE CONTRACT DRAWINGS. THE CONTRACTOR SHALL PROVIDE THE OWNER WITH ONE COMPLETE SET OF REPRODUCIBLE RECORD DRAWINGS STAMPED "AS-BUILT".
6. THE CONTRACTOR WILL REMAIN SOLELY AND COMPLETELY RESPONSIBLE FOR ENFORCEMENT OF AND COMPLIANCE WITH 1) ALL CONTRACT PLANS AND SPECIFICATIONS AND 2) ALL SITE WORKING CONDITIONS AND SAFETY REQUIREMENTS, DAY AND NIGHT, FOR BOTH PERSONS AND PROPERTY, IN EACH CASE BOTH BY THE CONTRACTOR AND ITS SUBCONTRACTORS. THESE INCLUDE ALL OSHA, NIOSH, U.S. EPA AND ANY OTHER APPLICABLE GOVERNMENTAL REGULATIONS.
7. EXISTING CONDITIONS, BOUNDARY SURVEY AND PROPOSED BOUNDARY FROM THE PLAN TITLED "REDFERN PROPERTIES LLC, SHERIDAN STREET AND EAST COVE STREET, PORTLAND, MAINE" BY NADEAU LAND SURVEYS DATED AUGUST 9, 2013.
8. SUBSURFACE DATA HAVE BEEN OBTAINED BY SUMMIT GEOENGINEERING SERVICES, INC. AND SHALL BE INCLUDED IN THE CONTRACT DOCUMENTS.
9. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING ACCESS TO THE SITE AND ALL ADJACENT PROPERTIES AT ALL TIMES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TEMPORARY MARKINGS, SIGNAGE AND INCIDENTALS TO MAINTAIN A SAFE VEHICLE AND PEDESTRIAN ACCESS THROUGH THE LIFE OF THE PROJECT. THE CONTRACTOR SHALL NOTIFY THE PORTLAND PUBLIC SAFETY DIVISION ROUTINELY REGARDING TEMPORARY IMPACTS OR CHANGES TO SITE ACCESS CONDITIONS.

LAYOUT NOTES:

1. MONUMENTS DELINEATING PROPERTY LINES OR RIGHT OF WAYS SHALL NOT BE DISTURBED DURING CONSTRUCTION OPERATIONS. IN THE CASE A MONUMENT IS DISTURBED, AT THE CONTRACTOR'S EXPENSE, THE MONUMENT SHALL BE RESET TO THEIR ORIGINAL LOCATION BY A REGISTERED LAND SURVEYOR.
2. ALL DIMENSIONS ON THE FOLLOWING SHEETS TAKE PRECEDENT OVER SCALED DIMENSIONS. EACH DRAWING WITH A BAR SCALE MEANS THAT THE DRAWING/DETAIL HAS BEEN SCALED AS ACCURATELY AS POSSIBLE, AND THE BAR SCALE IS FOR GENERAL REFERENCE ONLY. IF NO BAR SCALE IS PRESENT, THEN THERE IS NO SCALE TO THAT DRAWING/DETAIL. AT NO TIME SHOULD DRAWINGS BE SCALED FROM.
3. SIGNAGE, STRIPING AND PAVEMENT MARKINGS SHALL BE IN ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD).
4. THE CONTRACTOR SHALL OBTAIN THE SERVICES OF A LICENSED PROFESSIONAL LAND SURVEYOR TO PROVIDE A MINIMUM OF TWO TEMPORARY BENCHMARKS WITHIN THE SITE.
5. CONTRACTOR TO ENSURE THAT DRIVEWAYS AND MAILBOXES REMAIN FUNCTIONAL AND IN USE AT ALL TIMES.
6. ALL TRAFFIC CONTROL SIGNS INDICATED ON THE SITE LAYOUT PLAN ARE TO MEET ALL REQUIREMENTS & CONDITIONS OF THE CITY OF PORTLAND, MAINE DEPARTMENT OF TRANSPORTATION AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION.

PERMITTING NOTES:

1. THIS PROJECT IS SUBJECT TO THE TERMS AND CONDITIONS OF SITE PLAN - LEVEL III AND SUBDIVISION PERMIT FROM THE CITY OF PORTLAND.
2. THIS PROJECT IS SUBJECT TO THE TERMS AND CONDITIONS OF A MAINE CONSTRUCTION GENERAL PERMIT FROM THE MAINE DEP.
3. THE CONTRACTOR SHALL REVIEW THE ABOVE REFERENCED PERMITS PRIOR TO SUBMITTING A BID FOR THIS PROJECT, AND INCLUDE COSTS AS NECESSARY TO COMPLY WITH THE CONDITIONS OF THESE PERMITS.

GRADING AND DRAINAGE NOTES:

1. TOPSOIL STRIPPED FROM THE SITE THAT IS SUITABLE FOR REUSE AS LOAM SHALL BE STOCKPILED WITHIN THE PROPOSED LIMIT OF WORK AREA. THE CONTRACTOR SHALL NOT ASSUME THAT ANY LOAM WILL BE ACCEPTABLE FOR REUSE WITH THEIR ESTIMATE.
2. THE CONTRACTOR SHALL ANTICIPATE THAT GROUNDWATER WILL BE ENCOUNTERED DURING CONSTRUCTION AND SHALL INCLUDE SUFFICIENT COSTS WITHIN THEIR BID TO PROVIDE DEWATERING AS NECESSARY; NO SEPARATE PAYMENT SHALL BE MADE TO THE CONTRACTOR FOR DEWATERING.
3. THE OWNER SHALL BE RESPONSIBLE FOR OBTAINING ANY EASEMENT OR TEMPORARY CONSTRUCTION RIGHTS AS NECESSARY BY ADJACENT LAND OWNERS. THE CONTRACTOR SHALL NOT DISTURB ANY SOIL BEYOND THE PROPERTY LINE WITHOUT NOTIFYING AND OBTAINING SUCH EASEMENT OR TEMPORARY CONSTRUCTION RIGHT FROM THE OWNER.
4. THE CONTRACTOR SHALL PROVIDE A FINISH PAVEMENT SURFACE FREE OF LOW SPOTS AND PONDING AREAS. THE MINIMUM SLOPE SHALL MEET OR EXCEED 0.5% IN ALL CASES. ALL SLOPES SHALL BE AWAY FROM BUILDINGS AND TOP OF PAVEMENT SHALL BE AT OR BELOW EXISTING FINISH FLOOR ELEVATIONS.

5. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE FINAL GEOTECHNICAL REPORT PREPARED BY SUMMIT GEOENGINEERING SERVICES FOR REDFERN PROPERTIES, LLC.
6. EXCAVATED SOILS THAT ARE SUITABLE SHALL BE ACCEPTED FOR BACKFILL IF THEY ARE DEEMED SUITABLE IN ACCORDANCE WITH MAINE DOT GENERAL CONDITIONS, DATED FEBRUARY 2001 OR MOST RECENT EDITION, SECTION 104.3.13.
7. NO ADDITIONAL PAYMENT FOR UNSUITABLE MATERIALS.
8. ALL STORM DRAIN PIPE SHALL BE SMOOTH BORE INTERIOR PROVIDING A MANNINGS ROUGHNESS COEFFICIENT OF N=0.012 OR LESS.
9. A POST CONSTRUCTION - STORMWATER INSPECTION & MAINTENANCE PLAN IS FILED WITH THE CITY OF PORTLAND.

EROSION CONTROL NOTES:

1. ALL ROUTINE MAINTENANCE ACTIVITIES SHALL BE CONDUCTED IN SUCH A WAY TO LIMIT THE AMOUNT OF DISTURBED AREA AT ONE TIME TO THE EXTENT PRACTICABLE.
2. PRIOR TO THE START OF ANY CLEARING/LAND DISTURBING ACTIVITIES, THE CONTRACTOR SHALL INSTALL APPLICABLE EROSION CONTROL DEVICES SUCH AS PERIMETER SILT FENCE, AND OTHER APPLICABLE MEASURES. IN THE EVENT THE CONTRACTOR IS NOT SURE A EROSION CONTROL MEASURE SHOULD BE IMPLEMENTED, THE CONTRACTOR SHALL CONTACT THE ENGINEER OF RECORD TO CONFIRM IMPLEMENTATION OF ANY EROSION CONTROL DEVICES.
3. ALL GROUND AREAS GRADED FOR CONSTRUCTION SHALL BE GRADED, LOAMED, SEEDED AND MULCH SHALL BE APPLIED AS SOON AS POSSIBLE WITHIN 7 DAYS FOLLOWING THE COMPLETION OF ANY SOIL DISTURBANCE, AND PRIOR TO ANY STORM EVENT.
4. EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE INSTALLED TO THE SATISFACTION OF THE CITY. THE CONTRACTOR SHALL REFERENCE THE APPROVED EROSION AND SEDIMENTATION CONTROL REPORT FOR TEMPORARY AND PERMANENT EROSION AND SEDIMENTATION CONTROL DEVICES IN ADDITION TO THE PLAN SET. THE CONTRACTOR SHALL ALSO REFER TO THE MAINE D.E.P.'S PERMIT CONDITIONS, FINDINGS OF FACT AND ORDER (IF ANY), AND THE CURRENT MAINE EROSION AND SEDIMENT CONTROL BMP MANUAL FOR ADDITIONAL INFORMATION.

UTILITY NOTES:

1. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND ELEVATION OF THE EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED UPON RECORDS OF VARIOUS UTILITY COMPANIES AND WHERE POSSIBLE MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED UPON AS BEING EXACT OR COMPLETE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO TEST PIT TO DETERMINE THE EXACT LOCATION AND ELEVATION OF UTILITIES TO COORDINATE WITH THE PROPOSED CONNECTIONS OR CROSSING. ANY DISCREPANCIES SHALL BE IMMEDIATELY REPORTED TO THE CIVIL ENGINEER FOR FURTHER DIRECTIONS BEFORE ANY ADDITIONAL WORK PROCEEDS.
2. CONTRACTOR TO BYPASS EXISTING SEWER FLOW CONTROL AT CONNECTION TO EXISTING SYSTEM AT NO ADDITIONAL COST.
3. CONTRACTOR SHALL, AT NO ADDITIONAL COST TO THE OWNER, CONDUCT EXPLORATORY EXCAVATIONS AT LOCATIONS WHERE PROPOSED EXCAVATION WILL INTERSECT WITH EXISTING UTILITIES.
4. SEWER MANHOLES SHALL BE 4' ID UNLESS OTHERWISE STATED ON THE PLANS.
5. CONTRACTOR TO PROVIDE 5' OF COVER FROM TOP OF PIPE TO FINISH GRADE FOR WATER MAINS.
6. THRUST BLOCKS SHALL BE USED FOR THRUST RESTRAIN ON WATER MAINS. LIMITS FOR THRUST BLOCKS ARE SHOWN ON SHEET C45.
7. ALL REQUIRED FITTINGS FOR THE WATER MAIN ARE NOT SHOWN ON DRAWINGS. CONTRACTOR SHALL FURNISH AND INSTALL ALL NECESSARY FITTINGS REQUIRED TO CONSTRUCT THE WATER MAIN IN ACCORDANCE WITH CITY OF PORTLAND, STATE OF MAINE, AND AMERICAN WATER WORKS ASSOCIATION STANDARDS AND REGULATIONS.
8. CONTRACTOR SHALL COORDINATE WORK REGARDING ANY WATER MAIN CONNECTION AND WATER MAIN SHUTDOWN WITH THE PORTLAND WATER DISTRICT AT LEAST SEVEN (7) DAYS PRIOR TO CONSTRUCTION.
9. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
10. SEWER, GAS, TELEPHONE, CABLE, WATER AND ANY OTHER UTILITY CONNECTIONS SHALL BE COMPLETED IN ACCORDANCE WITH PLUMBING, ELECTRICAL, AND MECHANICAL CONTRACTS.
11. CONTRACTOR SHALL BE RESPONSIBLE FOR DISTURBING ANY SURVEY MONUMENTS DISTURBED DURING CONSTRUCTION VIA LICENSED SURVEYOR.
12. LIMITS OF CLEARING AND CONSTRUCTION SHALL BE LIMITED TO PROJECT SITE.
13. DO NOT SCALE THESE DRAWINGS. ANY DISCREPANCIES BETWEEN DRAWINGS, DETAILS, SPECIFICATIONS, AND THE FIELD CONDITION SHALL BE IMMEDIATELY REPORTED TO THE CIVIL ENGINEER FOR FURTHER DIRECTIONS BEFORE ANY ADDITIONAL WORK PROCEEDS.
14. COORDINATE EXIT POINT FOR SECONDARY SERVICE WITH THE ARCHITECT/ELECTRICAL ENGINEER. SECONDARY LINE LOCATIONS NOT PROVIDED BY ACORN ENGINEERING WITHIN THE UTILITY PLAN.
15. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN ALL THE NECESSARY PERMITS FOR THE INSTALLATION OF THE UTILITIES AND STORMDRAINS WITHIN THE PUBLIC RIGHT OF WAY. THE CONTRACTOR SHALL SUBMIT A MAINTENANCE OF TRAFFIC PLAN TO THE CITY IN ACCORDANCE WITH THE CITY OF PORTLAND TECHNICAL MANUAL PRIOR TO ANY WORK.

DEMOLITION NOTES:

1. THE EXISTING ASPHALT SHOULD BE STRIPPED AND EITHER PROCESSED ONSITE, REMOVED FROM THE SITE OR DISPOSED OF ONSITE.
2. REFER TO THE FINAL GEOTECHNICAL REPORT PREPARED BY SUMMIT GEOENGINEERING SERVICES FOR REDFERN PROPERTIES, LLC. FOR BORING LOG INFORMATION.

3. ALL DISPOSAL OF DEMOLITION DEBRIS OR WASTE SHALL BE IN ACCORDANCE WITH ALL LOCAL, STATE, & FEDERAL REGULATIONS. CONTRACTORS SHALL PROVIDE OWNER WITH APPROPRIATE "BILLS OF LADING" DEMONSTRATING PROPER DISPOSAL OF ALL MATERIALS.
4. SITE DEMOLITION SHALL NOT OCCUR UNTIL PROPER ABATEMENT PROCEDURES HAVE OCCURRED. ABATEMENT, IF NECESSARY SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

ISSUED FOR	BY
WORKSHOP #2	WHS
FINAL SUBMISSION	12/2/13
MAINE DEP MCGP	12/16/13
REVISION	REV
STAFF COMMENTS	DATE
	12/6/13

DRAWING NAME:	NOTES SHEET
	MUNJOY HEIGHTS
PROJECT NAME:	REDFERN MUNJOY, LLC
CLIENT:	P.O. BOX 8616, PORTLAND, MAINE 04104

A C O R N


ENGINEERING, INC.

ACORN ENGINEERING, INC.
3372 PORTLAND, MAINE 04104
(207) 775-2655

P.O. BOX 3372 PORTLAND, MAINE 04104
(207) 775-2655

ACORN ENGINEERING, INC. IS AN EQUAL OPPORTUNITY EMPLOYER.
ACORN ENGINEERING, INC. DOES NOT DISCRIMINATE ON THE BASIS OF RACE, GENDER, RELIGION, NATIONAL ORIGIN, ANCESTRY, COLOR, SEX, OR AGE.

FILE:	1047 COVER
DATE:	9/24/13
JN:	1047
SCALE:	NTS
DESIGN BY:	WHS
DRAWN BY:	ZRJ
CHECKED BY:	HPS

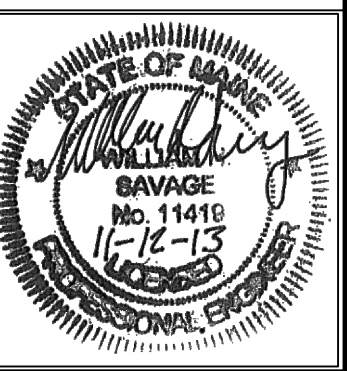

PERMIT DRAWINGS
NOT FOR CONSTRUCTION

DRAWING NO.
C-02