
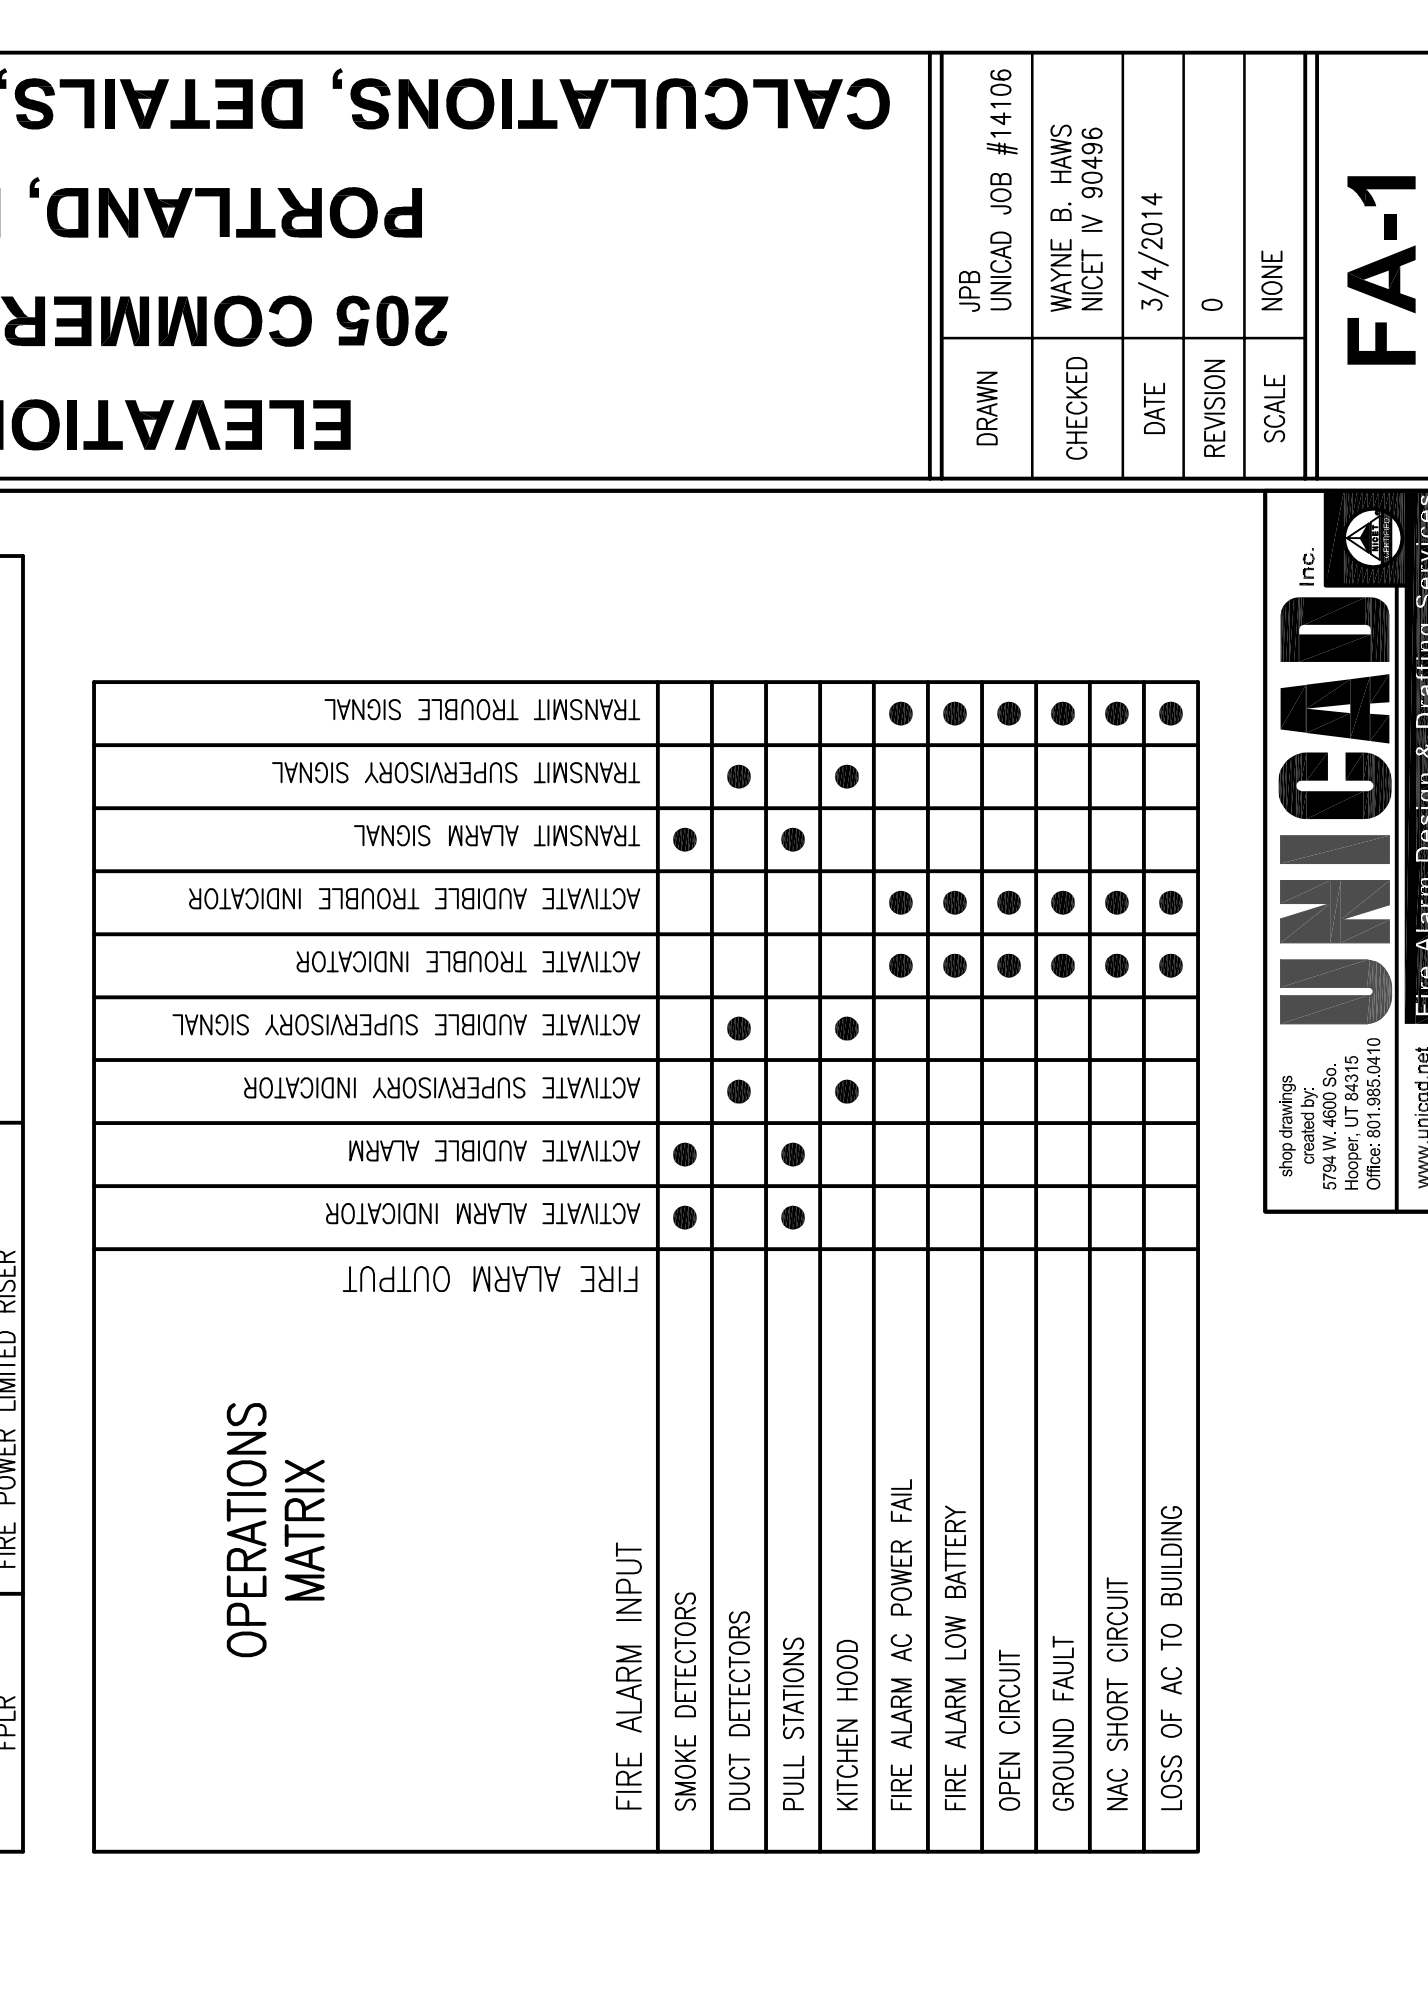
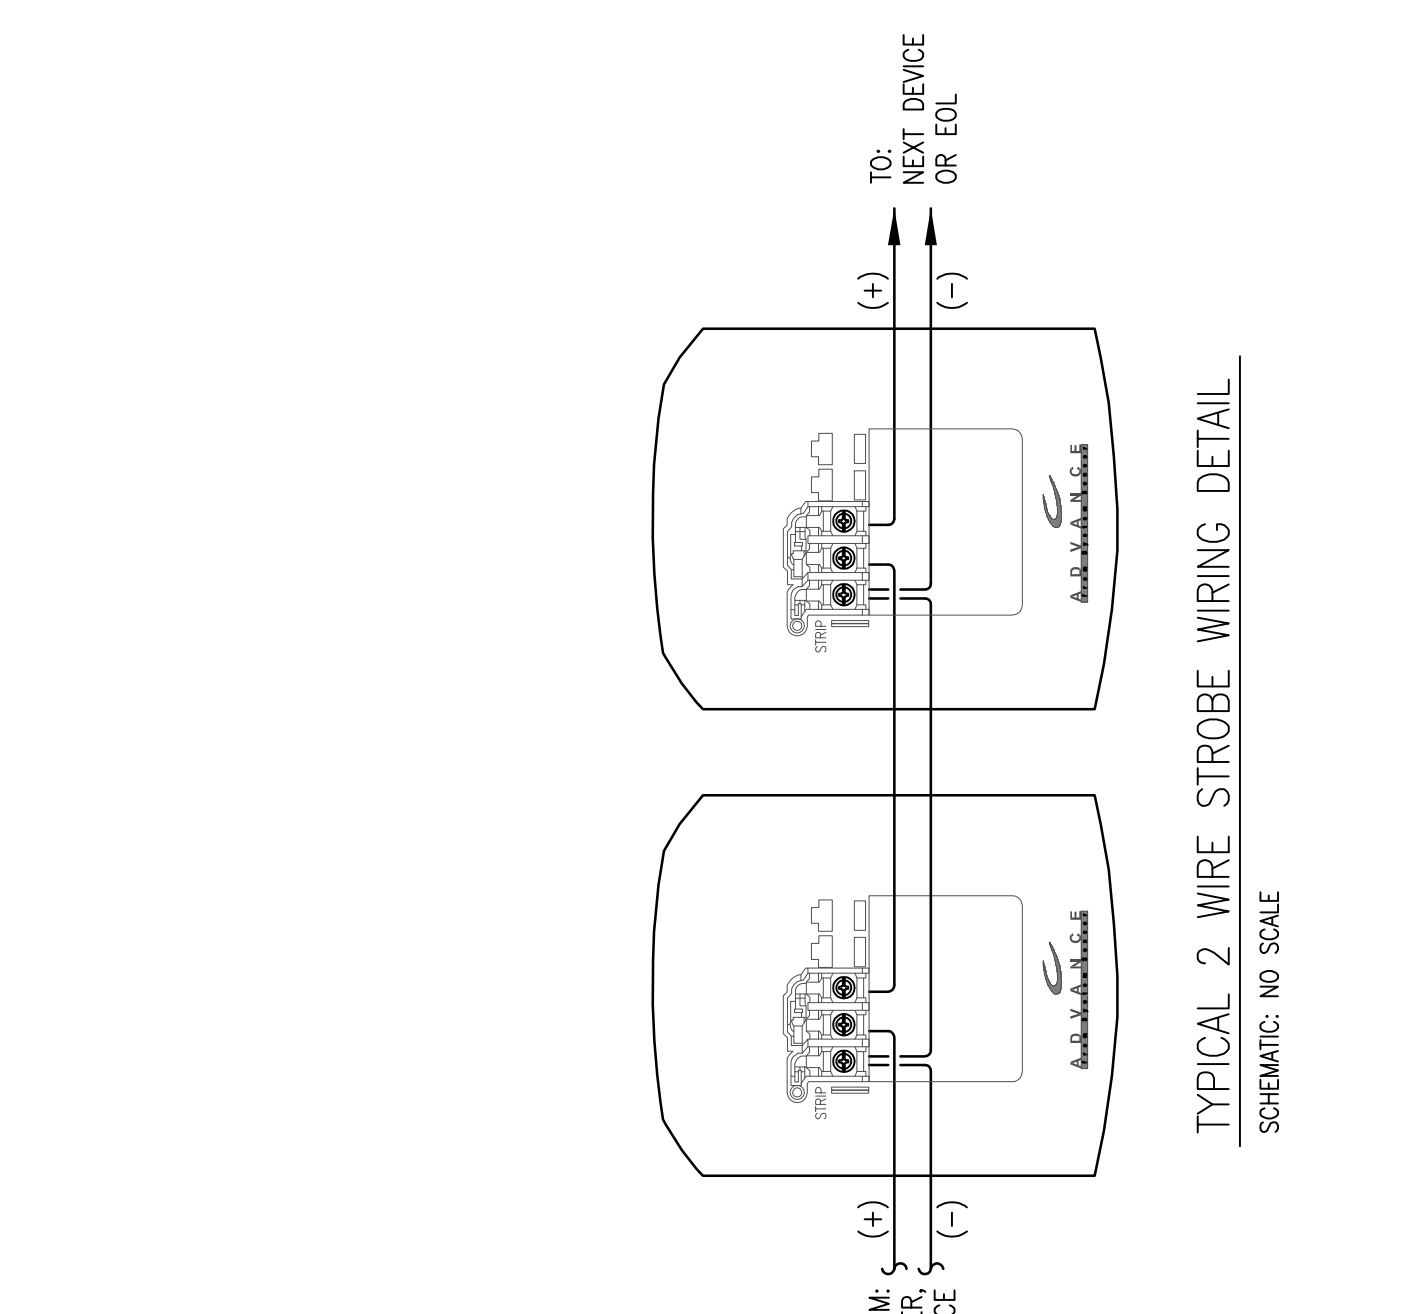
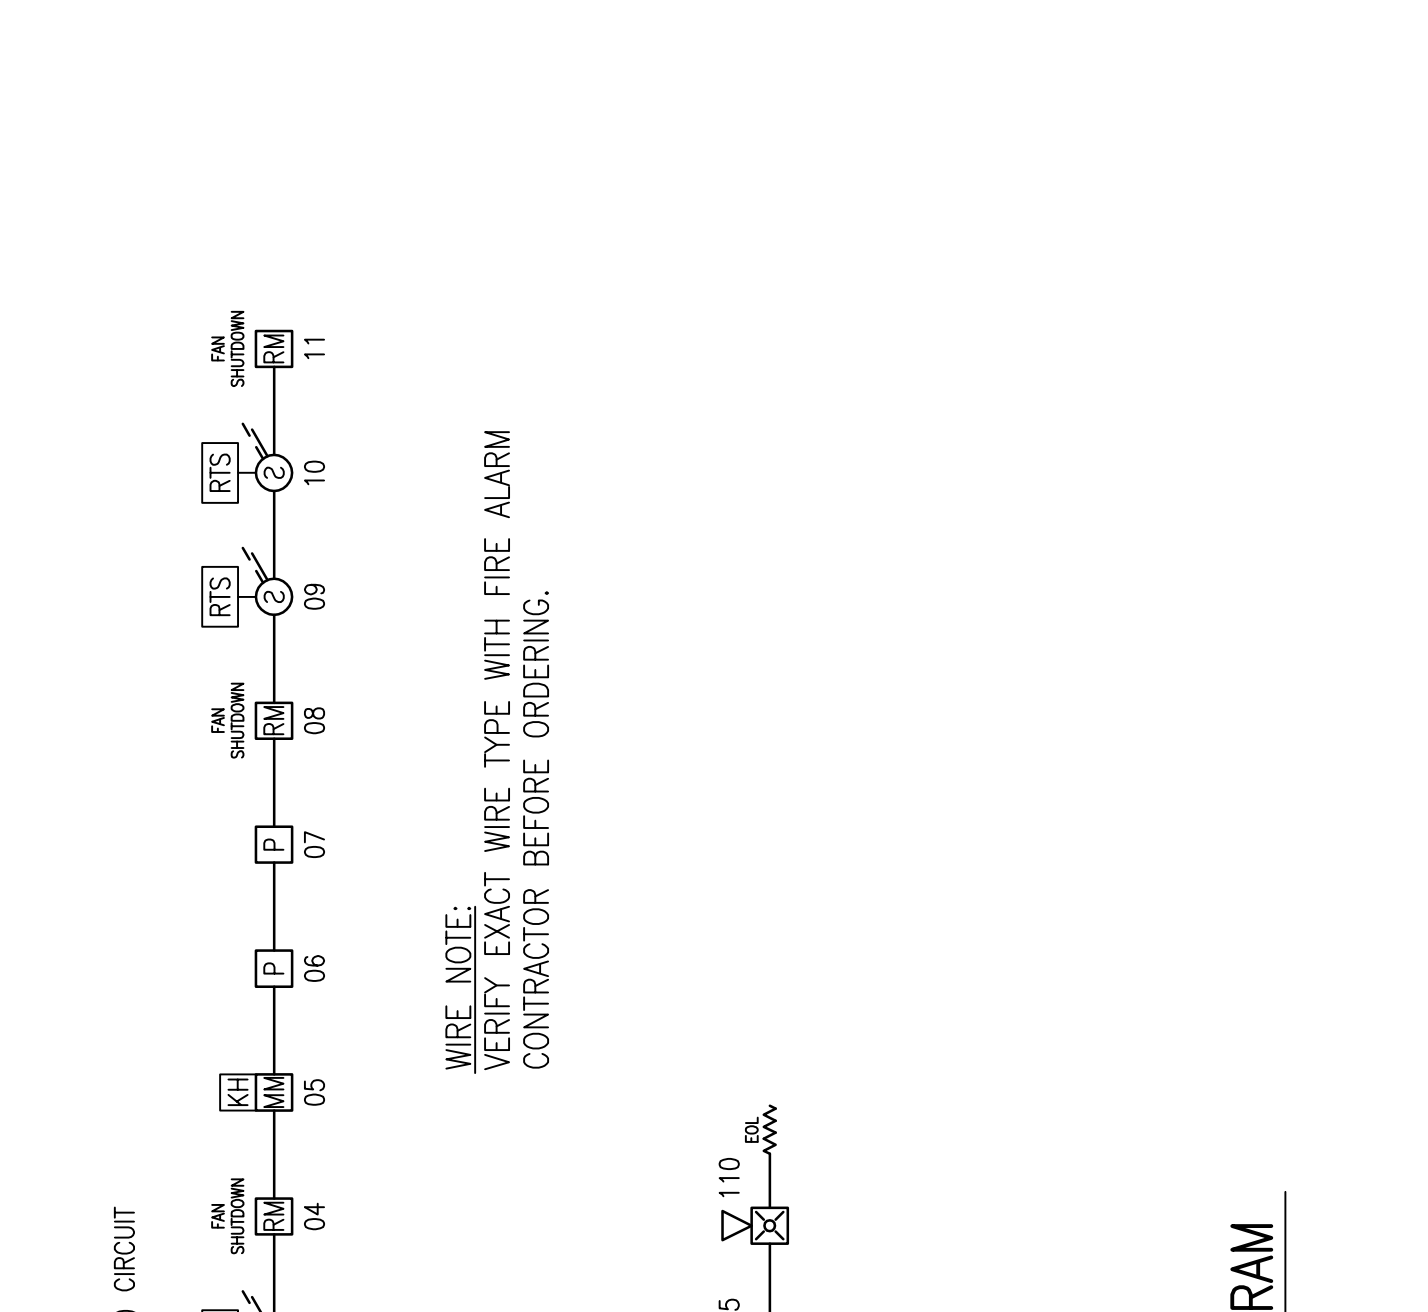
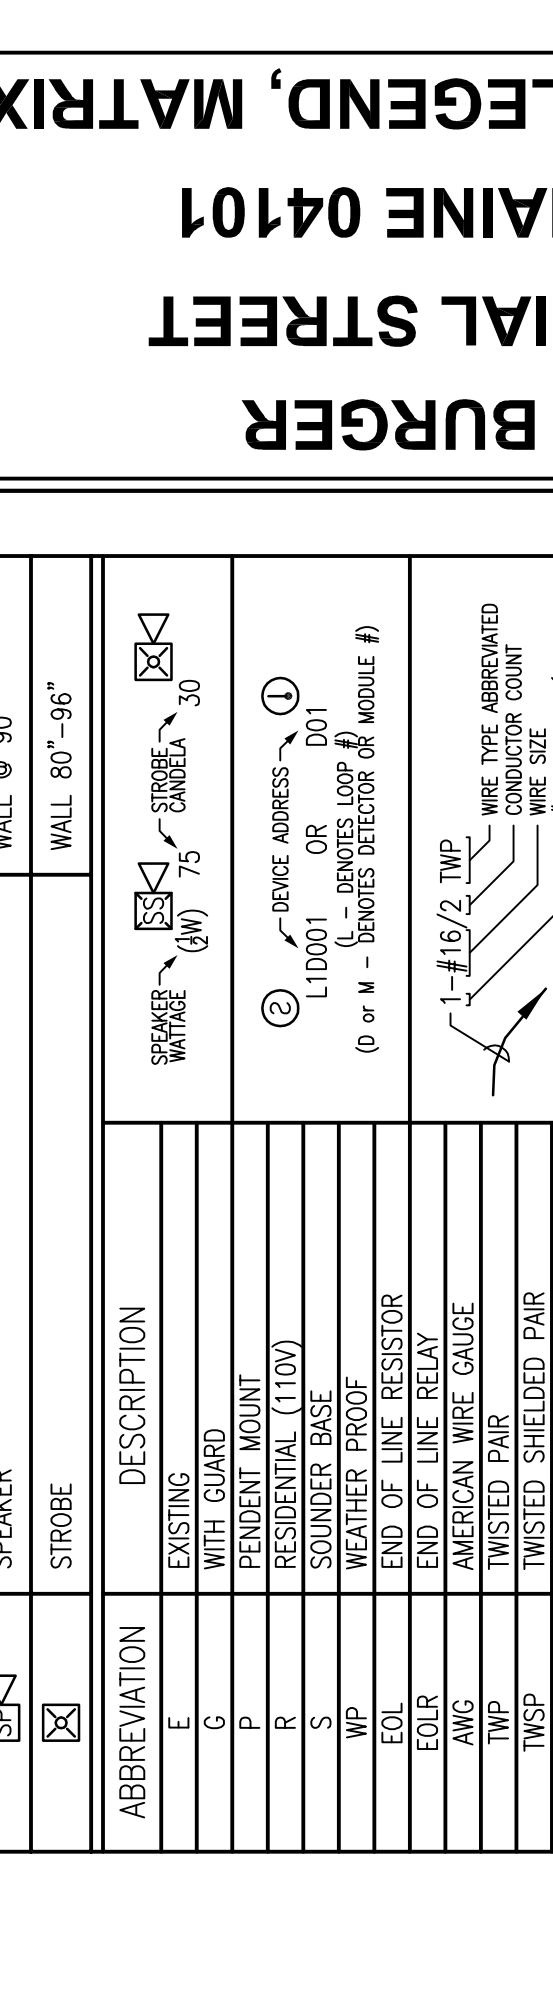


FCP Battery Calculation			3/4/2014
PROJECT NAME:	ELEVATOR BURGER		
Required Standby Time:	24 Hours		
Required Alarm Time:	3 Minutes		
Regulated Load in Standby			
Device Type	Number of Devices	Current (Amps)	Total Current (Amps)
MS-9050UD Main Circuit Board	1	0.12000	=
ANN-80 Remote Annunciator	1	0.01500	=
SD355 Smoke Detector	3	0.00030	=
D355PL Duct Detector	3	0.00030	=
MMF-300 Monitor Module	1	0.00040	=
BG-12LX Pull Station	3	0.00023	=
RTS-151 Remote Test Station	3	0.00000	=
TOTAL STANDBY LOAD			0.13729
Regulated Load in ALARM			
Device Type	Number of Devices	Current (Amps)	Total Current (Amps)
MS-9050UD Main Circuit Board	1	0.20000	=
ANN-80 Remote Annunciator	1	0.04000	=
All Addressable Devices - Maximum Draw	3	0.01200	=
RTS-151 Remote Test Station	3	0.03600	=
NAC-1	1	0.59900	=
NAC-2	1	0.10700	=
TOTAL ALARM LOAD			1.38200
Battery Requirements			
Standby Load	0.13729	X	24.00000
Current (Amps)	= 3.29496		
Alarm Load	1.38200	X	Required Alarm Time in Hours
Current (Amps)	= 0.11517		
Total Ampere Hours (before derating factor)	= 3.41013		
Derating Factor	X		
TOTAL AMPERE HOURS REQUIRED			4.09215
BATTERIES TO BE PROVIDED (2 - 12v)			7 AH

NAC Circuit Voltage Drop Calculation			3/4/2014
Project Name	ELEVATOR BURGER		
Circuit Number	NAC-1		
Nominal System Voltage	20.4 volts	Wire Gauge	1.4
Minimum Device Voltage	16 volts	Resistance Per 1000	6.14
Distance from source to 1st device	5		
Wire Gauge for balance of circuit			
Max Output Current	1.5 amps		
Total Circuit Current	0.599 amps		
Circuit is within limits			
Device 1	Distance previous device	Voltage at Device	Drop from source
Device 2	0.056	20.38	0.02
Device 3	0.079	20.34	0.06
Device 4	0.092	20.29	0.11
Device 5	0.212	20.25	0.15
Totals	0.599	20.18	0.22

- GENERAL NOTES:**
- THESE DRAWINGS ARE DIAGRAMMATIC. REFER TO THE ARCHITECTURAL DRAWINGS FOR EXACT DIMENSIONS.
  - INSTALLATION SHALL COMPLY WITH NEC, NFPA 72 AND ALL OTHER APPLICABLE CODES AS REQUIRED BY THE LOCAL AUTHORITY HAVING JURISDICTION.
  - WIRING DEPICED ON THESE PLANS IS SCHEMATIC - ACTUAL WIRE LOCATIONS MAY DIFFER FROM THESE PLANS. WIRING SHALL BE PERFORMED AS ACTUAL BUILDING CONSTRUCTION CONDITIONS ALLOW AND TO MINIMIZE PENETRATIONS THROUGH AREA SEPARATION WALLS AND FIRE WALLS. THE USE OF A RACEWAY IS PERMITTED AS LONG AS NO 110V OR HIGHER VOLTAGE CABLES ARE IN THE SAME RACEWAY.
  - FIRE RATINGS SHALL BE MAINTAINED FOR ALL PENETRATIONS THROUGH FIRE-RATED CONSTRUCTION.
  - POWER FOR ALL FIRE ALARM PANELS AND FIRE ALARM POWER SUPPLIES MUST BE PROVIDED BY A DEDICATED AC BRANCH CIRCUIT.
  - POWER-LIMITED AND NONPOWER-LIMITED CIRCUIT WIRING MUST REMAIN SEPARATED IN CABINET. ALL POWER-LIMITED CIRCUIT WIRING MUST REMAIN AT LEAST 0.25" AWAY FROM ANY NONPOWER-LIMITED CIRCUIT WIRING. FURTHERMORE, ALL POWER-LIMITED AND NONPOWER-LIMITED CIRCUIT WIRING MUST ENTER AND EXIT THE CABINET THROUGH DIFFERENT KNOCK OUTS AND/OR SEPARATE CONDUITS.
  - WHEN UTILIZING CLASS "A" CIRCUITS, SEPARATE OUTGOING AND RETURN CONDUCTORS OF CLASS "A" CIRCUITS BY A MINIMUM OF 12" WHERE RUN VERTICALLY AND 48" WHERE RUN HORIZONTALLY.
  - WHEN UTILIZING SHIELDED CABLE, TIE SHIELDS THROUGH AND INSULATE AT EACH JUNCTION BOX. INSULATE AND TAPE BACK AT END.
  - ALL FIRE ALARM CABLING SHALL BE ACCEPTABLE TO THE FIRE ALARM EQUIPMENT MANUFACTURER FOR THE INTENDED PURPOSE.
  - SMOKE DETECTORS SHALL NOT BE INSTALLED UNTIL AFTER CONSTRUCTION CLEAN-UP IS COMPLETED AND FINAL.
  - LOCATE SMOKE DETECTORS A MINIMUM OF THREE (3) FEET FROM MECHANICAL DIFFUSERS, WALL-MOUNTED SMOKE DETECTORS SHALL BE LOCATED A MINIMUM OF 4" AND A MAXIMUM OF 12" FROM CEILING. CEILING-MOUNTED SMOKE DETECTORS SHALL BE MOUNTED ON CEILINGS AND NOT ON THE BOTTOMS OF BEAMS OR JOISTS.
  - PROVIDE SYNCHRONIZATION OF ALL VISUAL NOTIFICATION APPLIANCE CIRCUITS. PROVIDE ALL REQUIRED SYNC MODULES. PROVIDE A MULTI-SYNC MODE SLAVE CONNECTION BETWEEN ALL SYNC MODULES.
  - VERIFY ALL FIELD SELECTABLE AUDIBILITY SETTINGS OF NOTIFICATION APPLIANCES WITH FIRE ALARM CONTRACTOR.
  - UPON COMPLETION OF THE FIRE ALARM SYSTEM INSTALLATION AND PROGRAMMING, THE INSTALLING CONTRACTOR SHALL PERFORM FINAL TESTING OF THE ENTIRE SYSTEM, PER ALL APPLICABLE CODES, AND SHALL COORDINATE AND PERFORM A FINAL FIRE ALARM SYSTEM INSPECTION.
  - PROVIDE OFF-SITE MONITORING AS REQUIRED BY THE INTERNATIONAL FIRE CODE, SECTION 907.15 AND THE LOCAL AUTHORITY HAVING JURISDICTION.
  - INSTALLING CONTRACTOR SHALL, PHYSICALLY, LABEL ALL INITIATING DEVICES AND NOTIFICATION APPLIANCE CIRCUIT END OF LINE (WHEN WIRING CLASS "B"). THESE LABELS SHALL BE IN PLACE PRIOR TO START-UP AND TESTING.

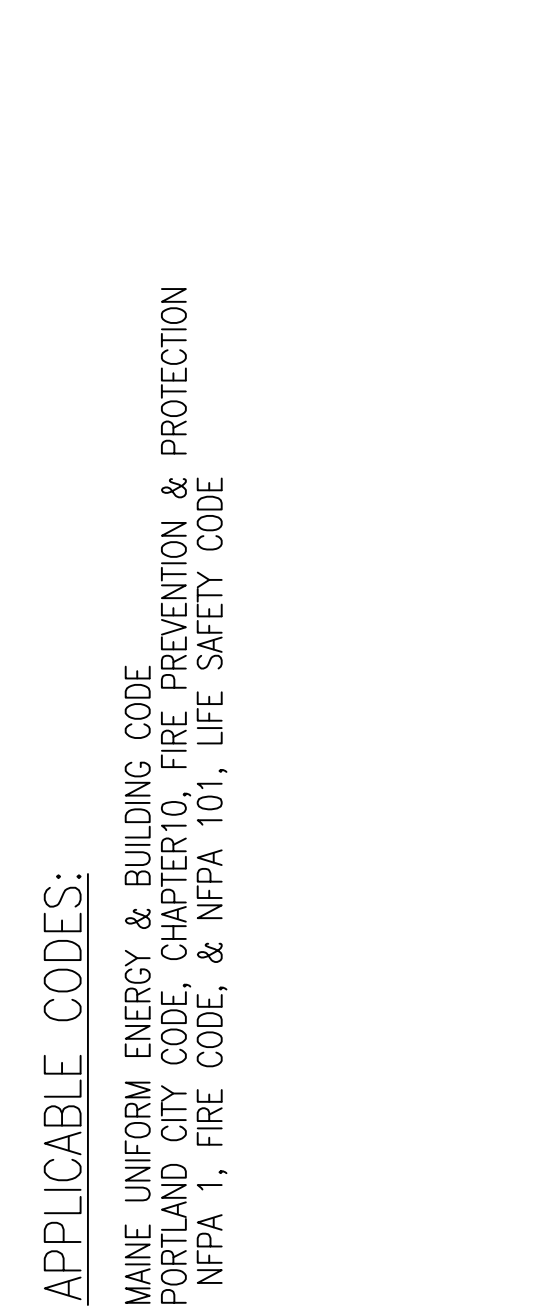

REVISION	DESCRIPTION	DATE
0	ISSUED FOR REVIEW & APPROVAL	3/5/2014

SCALE	NONE
REVISION	0
DATE	3/4/2014
CHECKED	WAYNE B. HANS NICT 11 90496
DRAWN	JPB UNICAD JOB #14106

**ELEVATION BURGER**  
**205 COMMERCIAL STREET**  
**PORTLAND, MAINE 04101**  
**CALCULATIONS, DETAILS, LEGEND, MATRIX, NOTES**