


STRUCTURAL FOUNDATION NOTES:
 A. FOOTINGS (PRESUMED SOIL BEARING PRESSURE = 200 PSF TO BE VERIFIED IN FIELD).
 B. CONCRETE SLAB ON GRADE SHALL BE 3000 PSI (FC) CONCRETE STRENGTH W/ 6x6 W 1.4 x W1.4 WWF 3/4" CLR FROM TOP OF SLAB. JOINTS 1/4" WIDE x 3/4" DEEP @ MAX. 15'x15' (225 SF. MAX). TYP.

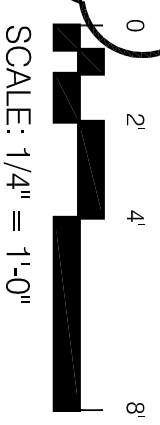

1 PROPOSED SUNROOM FOUNDATION PLAN
 1/4" = 1'-0"

SUNROOM FOUNDATION PLAN
 DETROY ROY

DATE:	6.13.2014
DRAWN BY:	BB

A-1.3