

GENERAL NOTES

1. DRAWING NOTES:

CONTRACTOR TO FURNISH AND INSTALL ALL NOTED LABOR AND MATERIALS UNLESS OTHERWISE NOTED.

2. CODE COMPLIANCE:

ALL WORK SHALL CONFORM TO THE LATEST EDITION OF STATE, LOCAL AND OTHER CODES WHICH APPLY TO THIS PROJECT OR HAVE JURISDICTION.

3. COORDINATION:

IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE ALL DISCIPLINES AND TRADES SO THAT ALL BUILDING SYSTEMS AND COMPONENTS CAN BE ASSEMBLED WITHOUT CONFLICTS. IN THE EVENT THAT THE CONSTRUCTION DOCUMENTS DEFINE CONDITIONS WHICH PROHIBIT, OR MAY PROHIBIT, SUCH ASSEMBLY, THE CONTRACTOR SHALL BRING TO THE ARCHITECTS ATTENTION, IN WRITING AND IN A TIMELY FASHION, SUCH CONDITION. THE CONTRACTOR SHALL NOT PROCEED WITH RELATED WORK WITHOUT A WRITTEN RESOLUTION CLARIFICATION FROM THE ARCHITECT. THE CONTRACTOR AND HIS/her SUBCONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING MATERIALS AND SYSTEMS SHOWN IN THE CONSTRUCTION DOCUMENTS REGARDLESS OF WHERE THE INFORMATION IS LOCATED. WHERE COMPONENTS OF A SYSTEM ARE INDICATED THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL LABOR AND MATERIALS NECESSARY TO COMPLETE THE SYSTEM.

4. DISCREPANCIES & CLARIFICATIONS:

THIS PROJECT INVOLVES THE FIT-UP OF AN EXISTING BUILDING. EXISTING DIMENSIONS SHOWN ON THE DRAWINGS ARE BELIEVED TO BE ACCURATE, BUT CANNOT BE GUARANTEED, MEASURE AND VERIFY DIMENSIONS IN FIELD PRIOR TO FABRICATION AND CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO BRING TO THE ARCHITECTS ATTENTION, IN WRITING, ANY DISCREPANCIES OR AMBIGUITIES IN THE DRAWINGS AND/OR SPECIFICATIONS. THE CONTRACTOR SHALL NOT PROCEED WITH RELATED WORK WITHOUT A WRITTEN RESOLUTION OR CLARIFICATION FROM THE ARCHITECT.

5. LAYOUT:

UNLESS INDICATED OTHERWISE, CENTER WALL FRAMING AND PARTITION FRAMING ON COLUMN LINES. FLOOR PLAN DIMENSIONS ARE TO CENTER OF FRAMING. FACE OF CONCRETE, FACE OF CMU, OR FROM COLUMN CENTERLINES, UNLESS INDICATED OTHERWISE. DOORS AND WINDOWS ARE DIMENSIONED TO CENTERLINES UNLESS INDICATED OTHERWISE.

6. CENTERING:

UNLESS INDICATED OTHERWISE, CENTER BUILDING ELEMENTS WITHIN OR BETWEEN OTHER BUILDING ELEMENTS WHEN CONDITIONS OR THE DRAWINGS INDICATE OR IMPLY THAT SUCH IS THE INTENT, WHETHER OR NOT DIMENSIONS ARE INCLUDED.

7. SYMMETRY:

WHERE CONDITIONS OR THE DRAWINGS INDICATE OR IMPLY THAT SYMMETRY IS INTENDED, INFORMATION PROVIDED AT ONE SIDE APPLIES EQUALLY TO BOTH SIDES, UNLESS CONDITIONS CLEARLY PRECLUDE SUCH APPLICATION.

8. ACCESSIBILITY:

ALL HANDICAPPED ACCESSIBLE BATHROOMS, GRAB BARS, AND DOOR OPENINGS SHALL MEET THE REQUIREMENTS OF TITLE 94-34, CHAPTER 5 OF THE MAINE HUMAN RIGHTS COMMISSION TITLE LATEST EDITION - THE DEPARTMENT OF JUSTICE ADA STANDARDS FOR ACCESSIBLE DESIGN.

9. DRAWING SCALES:

WORK FROM THE GIVEN DIMENSIONS ONLY. SCALE IS INDICATED ON THE DRAWINGS FOR CONVENIENCE ONLY. IT IS NOT INTENDED THAT INFORMATION BE DETERMINED BY SCALING THE DRAWINGS SINCE SOME ITEMS MAY NOT BE TO SCALE.

10. WATER-RESISTANT GWB:

INSTALL WATER-RESISTANT GYPSUM WALL BOARD IN ALL REST ROOMS, TOILET ROOMS OR AT ANY WALL WITH PLUMBING FIXTURES.

10A. HIGH IMPACT GWB:

INSTALL HIGH IMPACT GYPSUM WALL BOARD IN ALL STAIRWELLS

11. INTERIOR ELEVATIONS:

INTERIOR ELEVATIONS MAY BE REVERSED FROM AND/OR SIMILAR TO ACTUAL CONDITIONS. SEE FLOOR PLANS FOR WINDOW AND DOOR IDENTITIES AND LOCATIONS, FOR CASEWORK LAYOUTS, AND FOR MONITOR LOCATIONS.

12. BUILDING INSULATION:

PROVIDE AS INDICATED IN WALL SECTIONS AND IN ACCORDANCE WITH PARTITION TYPES, WHETHER OR NOT SHOWN IN DETAILS AND OTHER DRAWINGS. FOR CLARITY, INSULATION MAY NOT BE SHOWN IN SOME CASES, EVEN IF IT IS TO BE PROVIDED.

13. BLOCKING:

INSTALL BLOCKING BEHIND ALL SURFACE-APPLIED FIXTURES, TRIM, CASEWORK, SHELVES, BRACKETS, TOILET ACCESSORIES, CHAIR RAILS, PICTURE RAILS, GRAB BARS, BASE MOLDINGS, AND AS OTHERWISE REQUIRED, WHEN SUCH ITEMS ARE APPLIED ON STUD WALLS.

14. PENETRATIONS AT STRUCTURAL MEMBERS:

BEFORE PENETRATING JOISTS, BEAMS OR OTHER STRUCTURAL MEMBERS, CONSULT WITH THE ARCHITECT.

15. DAMAGED WORK:

BUILDING OR SITE COMPONENTS WHICH ARE AFFECTED BY NEW WORK, DEMOLITION, OR WHICH MAY BE DAMAGED BY THE GENERAL CONTRACTOR OR ANY SUB-CONTRACTOR SHALL BE REPLACED OR RESTORED TO ORIGINAL CONDITION AND COLOR TO MEET THE APPROVAL OF THE ARCHITECT.

16. UTILITIES:

VERIFY THE SIZE AND LOCATION OF ALL UNDERGROUND UTILITIES AND REPORT ANY DISCREPANCIES TO THE ARCHITECT IN WRITING. DO NOT PROCEED WITH WORK UNTIL THE DISCREPANCY HAS BEEN RESOLVED TO THE SATISFACTION OF THE ARCHITECT.

17. RATED CONSTRUCTION:

PROVIDE RATED CONSTRUCTION AS REQUIRED BY CODE, AS SPECIFIED, AND AS INDICATED ON DRAWINGS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE AND INSTALL ALL COMPONENTS REQUIRED TO CREATE SUCH RATED CONSTRUCTION, REGARDLESS OF WHETHER OR NOT SUCH COMPONENTS ARE INDICATED. PROVIDE CONTINUITY OF SUCH RATED CONSTRUCTION AROUND AND BETWEEN SPACES, INCLUDING AT CHASES AND AT FLOORS, TO MAINTAIN COMPLETE SEPARATIONS, EVEN IF NOT SPECIFICALLY INDICATED.

18. SHOP DRAWINGS:

SUBMIT SHOP DRAWINGS TO THE ARCHITECT FOR REVIEW PRIOR TO FABRICATIONS. SUBMITTALS REQUIRED INCLUDE, BUT ARE NOT LIMITED TO, SHOP DRAWINGS FOR ALL PREFABRICATED CONCRETE, STEEL, MILLWORK, SIGNAGE, SAMPLES OF ALL PROPOSED PAINTS, METALS, WALL COVERINGS, LAMINATES, SOLID SURFACE MATERIALS, CERAMIC TILE, AND HARDWARE. SUBMIT MANUFACTURERS' DATA FOR ALL LIGHTING SYSTEMS, AND HARDWARE.

19. PERMITS:

THE GENERAL CONTRACTOR SHALL OBTAIN AND PAY FOR ANY BUILDING PERMITS REQUIRED AND CARRY ANY INSURANCE COVERAGES REQUIRED.

20. INTERIOR FINISHES:

ALL INTERIOR FINISHES AND FURNISHINGS ARE TO BE CLASS 'A' FIRE-RATED AND ARE TO COMPLY WITH SECTION 920.0 BOCA INTERIOR FLAME SPREAD.

21. ELECTRICAL DESIGN:

REFER TO ELECTRICAL DRAWINGS AND SPECIFICATIONS

22. WASTE REMOVAL:

THE GENERAL CONTRACTOR SHALL DISPOSE OF ALL WASTE AND DEBRIS OFF THE PREMISES.

23. LANDLORD COORDINATION:

THE GENERAL CONTRACTOR MUST COORDINATE WITH THE BUILDING OWNER ALL ACTIVITIES INCLUDING BUT NOT LIMITED TO WORK WHICH WILL GENERATE EXCESSIVE NOISE AND MODIFICATION TO UTILITIES. WORK MUST NOT INTERFERE WITH EXISTING SMOKE DETECTORS, ALARMS OR BUILDING SYSTEM MANAGEMENT.

24. TEMPORARY FACILITIES:

PROVIDE ALL TEMPORARY FACILITIES AND SERVICES, CONSTRUCTION AND SUPPORT FACILITIES, AND SECURITY AND PROTECTION AS NEEDED TO PROTECT NEW AND EXISTING CONSTRUCTION FOR THE DURATION OF A COMPLETE INSTALLATION.

25. FINAL CLEANING:

EMPLOY EXPERIENCED WORKERS FOR FINAL CLEANING. CLEAN EACH SURFACE TO THE CONDITION EXPECTED IN A COMMERCIAL BUILDING CLEANING PROGRAM.

26. MANUFACTURERS INSTRUCTIONS:

ALL MATERIALS EQUIPMENT SHALL BE INSTALLED ACCORDING TO MANUFACTURER'S SPECIFICATIONS.

27. GUARANTEE:

UNLESS ALL MATERIALS AND WORKMANSHIP SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE UNLESS OTHERWISE SPECIFIED FOR A LONGER PERIOD OF TIME ON A CERTAIN ITEM.

28. ASBESTOS:

ALL MATERIAL USED FOR THE CONSTRUCTION OF THIS PROJECT, WHETHER BUILDING MATERIALS OR APPURTENANCES, SHALL BE NON-ASBESTOS CONTAINING MATERIAL.

29. HAZARDOUS FUMES:

THE GENERAL CONTRACTOR SHALL CONFIRM THAT ALL MATERIAL AND FINISHES SPECIFIED AND THEIR FABRICATION OR INSTALLATION WILL NOT RELEASE FUMES OR AROMAS DURING CONSTRUCTION WHICH MAY BE A HAZARD OR NUISANCE TO PERSONNEL.

30. PEST CONTROL:

SEAL AND CAULK AROUND ALL PENETRATIONS, CRACKS AND CREVICES AND ANY OPENINGS CAPABLE OF HARBORING INSECTS/RODENTS.

31. EXPOSED UTILITIES:

ALL EXPOSED UTILITY WIRES AND PIPES ELECTRICAL, PLUMBING, ETC. SHALL BE INSTALLED IN A WAY THAT DOES NOT OBSTRUCT OR PREVENT THE CLEANING OF FLOORS, WALLS, AND CEILING AREAS. THEY SHALL BE INSTALLED A MINIMUM OF 6" OFF FLOORS AND 1" OFF WALLS, CEILINGS AND ADJACENT PIPES.

32. OWNER SUPPLIED EQUIPMENT:

EQUIPMENT SUPPLIED BY THE OWNER AND INSTALLED BY THE GENERAL CONTRACTOR. EQUIPMENT INFORMATION AND SPECIFICATIONS ARE TO BE THE MOST CURRENT AVAILABLE AT THE TIME OF DOCUMENTATION PREPARATION. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING WITH THE OWNER THE EACT DIMENSIONS AND EQUIPMENT CONNECTION REQUIREMENTS INCLUDING ELECTRICAL CIRCUIT REQUIREMENTS. OF EQUIPMENT TO BE SUPPLIED. THE GENERAL CONTRACTOR SHALL MAKE ALL FINAL CONNECTIONS AS NOTED ON THE DRAWINGS. INSTALL THE SET UP IN WORKING ORDER. CHECK WARRANTIES, TEST AND NOT VOID WARRANTIES. THE GENERAL CONTRACTOR SHALL COORDINATE WITH THE OWNER DELIVERY, STORAGE AND INSTALLATION OF ALL OWNER SUPPLIED EQUIPMENT. THE GENERAL CONTRACTOR SHALL STORE EQUIPMENT IF REQUIRED BY THE OWNER UNTIL INSTALLATION. SEE DRAWINGS FOR OTHER OWNER SUPPLIED GENERAL CONTRACTOR INSTALLED ITEMS.

33. FIRE PROTECTION NOTE:

EXISTING SPRINKLERHEADS, ALARM SYSTEM AND DETECTORS ARE TO BE MODIFIED TO CONFORM WITH THE PROPOSED PLAN. COORDINATE WITH THE ARCHITECT, ANY MODIFICATION OR LOCATIONS WHERE EXISTING SYSTEMS ARE AFFECTED BY THE NEW DESIGN.

34. SOILS AT FOOTINGS:

REPORT THE LOCATION OF ALL UNSUITABLE SOILS AND MATERIALS BELOW ANTICIPATED LEVEL OF FOOTING TO THE ARCHITECT PRIOR TO THE SETTING OF FORMS.

35. ACCESS PANELS:

CONTRACTOR IS RESPONSIBLE FOR COORDINATING QUANTITY AND LOCATION OF ALL REQUIRED ACCESS PANELS FOR ALL MEP CONTROLS, CLEANOUTS, DAMPERS, PULL BOES, ETC.

36. EXISTING HAZARDOUS MATERIALS

ALL HAZARDOUS MATERIALS INCLUDING BUT NOT LIMITED TO ASBESTOS AND LEAD PAINT ARE TO BE HANDLED, ENCAPSULATED, ABATED AND DISPOSED OF IN ACCORDANCE WITH ANY AND ALL FEDERAL, STATE AND LOCAL REQUIREMENTS AND REGULATIONS.

37. INDUSTRY STANDARDS:


ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH INDUSTRY STANDARDS. STANDARDS INCLUDE BUT ARE NOT LIMITED TO THE FOLLOWING:

AAMA	AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION
ACI	AMERICAN CONCRETE INSTITUTE
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE
ASTM	AMERICAN SOCIETY FOR TESTS AND MATERIALS
AWI	ARCHITECTURAL WOODWORK INSTITUTE "CUSTOM GRADE"
AWS	AMERICAN WELDING SOCIETY
IGMA	INSULATING GLASS MANUFACTURERS ASSOCIANCE
NAAMM	NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS
NRCA	NATIONAL ROOFING CONTRACTORS ASSOCIATION
NTCA	NATIONAL TILE CONTRACTORS ASSOCIATION
SMACNA	SHEET METAL AND AIR CONDITIONING NATIONAL ASSOCIATION
WDMA	WINDOW AND DOOR MANUFACTURERS ASSOCIATION


ABBREVIATIONS

A	AC	AIR CONDITIONING	L	LAB	LABORATORY
AC	ACT	ACOUSTICAL CEILING TILE	LAM	LAM	LAMINATED
ADA	ADRAIN	ADA DRAIN	LB	LB	POUND
ADAAG	AD	AMERICANS WITH DISABILITIES ACT ACCESSIBILITY'S GUIDELINES	LH	LH	LEFT HAND
ADD	AFF	ADDITION	LCC	LCC	LEAD COATED COPPER
AFF	AHU	ABOVE FINISHED FLOOR AIR-HANDLING UNIT	M	MACH	MACHINE
AHU	ALUM	ALUMINUM	MAL	MAL	MASONRY
ARCH	ARCH	ARCHITECT ARCHITECTURAL	MA	MA	MATERIAL
AWP	AWP	ACOUSTIC WALL PANEL	MDO	MDO	MEDIUM-DENSITY OVERLAY
B	B TO BLS	BACK-TO-BACK ANGLES	MECH	MECH	MECHANICAL
B B G.C.	B	BASE BUILDING GENERAL CONTRACTOR	MEMB	MEMB	MEMBRANE
BL	BLDG	BUILDING LINE	MET	MET	METAL
BLDG	BLK	BLOCKING	ME	ME	MECHANICAL
BSMT	BSMT	BASEMENT	MFR	MFR	MANUFACTURER
BETW	BETW	BETWEEN	MISC	MISC	MISCELLANEOUS
BO	BO	BY OTHERS	MO	MO	MASONRY OPENING
C	C	COURSE MASONRY	MTD	MTD	MOUNTED
CER	CER	CERAMIC	MTL	MTL	METAL
CG	CG	CORNER GUARD	MB	MB	MARKER BOARD
CH	CH	CHIMNEY	N	N	NORTH
CJ	CJ	CONTROL JOINT	NC	NC	NOT IN CONTACT
CL	CL	CENTER LINE	NOM	NOM	NOMINAL DIMENSION
CLG	CLG	CEILING	NTS	NTS	NOT TO SCALE
CMU	CMU	CONCRETE MASONRY UNIT	O	O	ON OVER
COL	COL	COLUMN	OD	OD	ON CENTER
COND	COND	CONDITION	OD	OD	OUTSIDE DIAMETER/OUTSIDE DIMENSION
CONN	CONN	CONNECT/CONNECTION	OFF	OFF	OFFICE
CONSTR	CONSTR	CONSTRUCTION	OPNS	OPNS	OPENINGS
CONT	CONT	CONTINUOUS	OPP	OPP	OPPOSITE
CORNR	CORNR	CORNER	OPPH	OPPH	OPPOSITE HAND
CT	CT	CERAMIC TILE	OSB	OSB	ORIENTED STRAND BOARD
CUH	CUH	CABINET UNIT HEATER	OZ	OZ	OUNCE
D	DBL	DOUBLE	P	P	PURCHASED BY OWNER INSTALLED BY CONTRACTOR
DBL	DIA	DIAMETER	PC	PC	PRECAST
DIA	DIFF	DIFFUSER	PL	PL	PLATE
DIFF	DIM	DIMENSION	PLAM	PLAM	PLASTIC LAMINATE
DIM	DN	DOWN	PL	PL	PLY
DN	DR	DOOR	PRE FAB	PRE FAB	PREFABRICATE
DR	DSP	DRIP AND PIPE	PRIV	PRIV	PRIVACY
DSP	DWG	DRAWING	PRIM	PRIM	PRIMER
DWG	E	EAST	PSF	PSF	POUNDS PER SQUARE FOOT
E	EA	EACH	PSI	PSI	POUNDS PER SQUARE INCH
EA	ELEC	ELECTRICAL	PTD	PTD	PAINTED
ELEC	ELEV	ELEVATION	PTN	PTN	PARTITION
ELEV	ENTR	ENTRANCE	PVC	PVC	POLYVINYL CHLORIDE
ENTR	E-UAL	EQUAL	PWD	PWD	PLYWOOD
E-UAL	E-UP	EQUIPMENT	PERF	PERF	PRESSURE TREATED PERFORATED
E-UP	E-P	E-PANSION	R	R	RISER RADIUS
E-P	E-PB	E-PANSION BOLT	RAD	RAD	RADIUS
E-PB	E-PJ	E-PANSION JOINT	RAD	RAD	RADIUS
E-PJ	E-T	EXTERIOR	RCP	RCP	REFLECTED CEILING PLAN
E-T	EPDM	ETHYLENE PROPYLENE DIENE MONOMER	RDR	RDR	ROOF DRAIN
EPDM	EW	ELECTRIC WATER COOLER	REF	REF	REFRIGERATING BAR
EW	F	FAHRENHEIT	REFIN	REFIN	REFINISHED
F	FB	FIRE B	RES	RES	RESILIENT
FB	FC	FIRE E-TINGUISHER AND CABINET	REV	REV	REVERSE
FC	FD	FLOOR DRAIN	RM	RM	ROOM
FD	FEC	FIRE E-TINGUISHER	RO	RO	ROUGH OPENING
FEC	FETWD	FIRE TREATED WOOD	ROW	ROW	RIGHT OF WAY
FETWD	FIN	FINISH	S	S	SOUTH
FIN	FIB	FIBER REINFORCED GYPSUM	SCHED	SCHED	SCHEDULE
FIB	FIB	FIBER REINFORCED GYPSUM	SCH	SCH	SCHEDULE
FIB	FR	FIRE RATED	S	S	SQUARE FEET
FR	FRH	FUME HOOD	SI	SI	SIMILAR
FRH	G	GAUGE	SPEC	SPEC	SPECIFICATION
G	GA	GALVANEED	S	S	STAINLESS STEEL
GA	GALV	GALVANEED	STC	STC	SOUND TRANSMISSION CLASS STANDARD
GALV	GB	GRAB BAR	STL	STL	STEEL
GB	GC	GENERAL CONTRACTOR	STR	STR	STRUCTURE
GC	GFI	GROUNDFault INTERRUPTER	SUSP	SUSP	STRUCTURE STRUCTURAL SUSPENSION
GFI	GL	GLASS GLAZING GLAZED	T	T	TONGUE/GROOVE
GL	GLAM	GLUE LAMINATED WOOD	T-G	T-G	TELEPHONE
GLAM	GND	GROUND	THK	THK	THICK
GND	GWB	GYPSUM WALL BOARD	TKD	TKD	TOP OF DECK
GWB	H	HOSE BIB	TOS	TOS	TOP OF STEEL
H	HC	HANDICAP	TV	TV	TYPICAL
HC	HIM	HOLLOW METAL	TV	TV	TELEVISION
HIM	HORI	HORIZONTAL	TB	TB	TACK BOARD
HORI	HP	HORSE POWER/HIGH POINT HEAT PUMP	TOC	TOC	TOP OF CONCRETE
HP	HR	HOUR	U	U	UNDER CONTRACTORS LABORATORIES, INC.
HR	HVAC	HOT WATER HEATING VENTILATION AIR CONDITIONING	UV	UV	UNIT VENTILATOR
HVAC	I	INSIDE DIMENSION/INSIDE DIAMETER	V	V	VINYL COMPOSITION TILE
I	ID	INSIDE DIMENSION/INSIDE DIAMETER	VCT	VCT	VERTICAL
ID	IN	INCHES	VERT	VERT	VERTICAL
IN	INFO	INFORMATION	VIF	VIF	VERIFY IN FIELD
INFO	INSUL	INSULATION	VOL	VOL	VOLUME
INSUL	J	JOIST	W	W	WEST
J	JT	JOINT	WO	WO	WITHOUT
JT	K	KILN-DRIED	W	W	WITH
K	KIP	1000 POUNDS	WD	WD	WOOD
KIP			WF	WF	WIDE FLANGE
			WP	WP	WORK POINT
			WT	WT	WEIGHT

FIRESTOPPING DETAILS

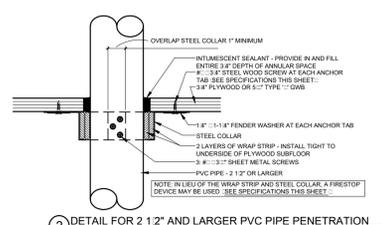

2. DETAIL FOR 2 1/2\"/>

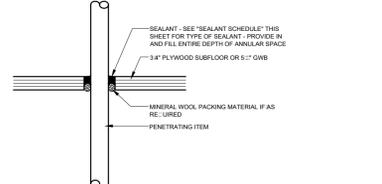

1. DETAIL LESS THAN 2 1/2\"/>

SPECIFICATIONS

WRAP STRIP: 1/4" THICK 1 1/2" MINIMUM WIDTH INTUMESCENT MATERIAL WITH PLASTIC FILM FACING BOTH SIDES. TEMPORARILY SECURE WITH MAKING TAPE. SPECIFIED TECHNOLOGIES INC. STI: "S" Seal RED Wra: 5/8" OR "S" Seal BLU Wra: 5/8" OR E-UAL.

STEEL COLLAR: WRAP STRIP MANUFACTURER'S STEEL COLLAR, FABRICATED FROM 3/16 INCH THICK GALVANEED SHEET STEEL. WIDTH TO MATCH WRAP STRIP. 3 1/2" MINIMUM. WITH 1 INCH 1/2 INCH ANCHOR TABS AND RETAINER TABS. ANCHOR TABS TO BE SYMMETRICALLY OPPOSED AROUND COLLAR. PROVIDE 3 TABS FOR 2 1/2" AND 3" PIPE; PROVIDE 4 TABS FOR 4" PIPE.

INTUMESCENT SEALANT: ONE-PART, INTUMESCENT, LATE ELASTOMER TESTED TO ASTM E 814. MINIMUM EXPANSION OF 3:1 AT 1000°F. 3M FIRE BARRIER SEALANT CP 260W4" OR EQUAL.

FIRESTOP SEALANT: SINGLE COMPONENT NONCOMBUSTIBLE FIRE RATED SEALANT TESTED TO ASTM E 814. TESTED TO 3000°F. BOSS 136 FIRESTOP DRAFT SEALANT MANUFACTURED BY ACCUMETRIC, LLC. OR E-UAL.

SEALANT SCHEDULE:


INTUMESCENT SEALANT: PROVIDE AT ALL PENETRATIONS THROUGH RATED CONSTRUCTION FOR PENETRATING ITEMS INCLUDING BUT NOT LIMITED TO: PVC PIPE; ROOF LEADER PIPES; GAS PIPES; LINES; SPRINKLER PIPES; ELECTRICAL; COMMUNICATIONS CABLES; WIRES; AND ALARM SYSTEM WIRES. DO NOT USE INTUMESCENT SEALANT AT DOMESTIC HOT WATER OR HYDRONIC HEATING SYSTEM PIPES.

FIRESTOP SEALANT: PROVIDE AT ALL PENETRATIONS THROUGH RATED CONSTRUCTION FOR PENETRATING ITEMS INCLUDING DOMESTIC HOT AND COLD WATER PIPES AND HYDRONIC HEATING SYSTEM PIPES.

NOTE:

FOR LOCATIONS OF RATED CONSTRUCTION, SEE ARCHITECTURAL FLOOR PLANS AND SECTIONS

DRAWING LEGEND

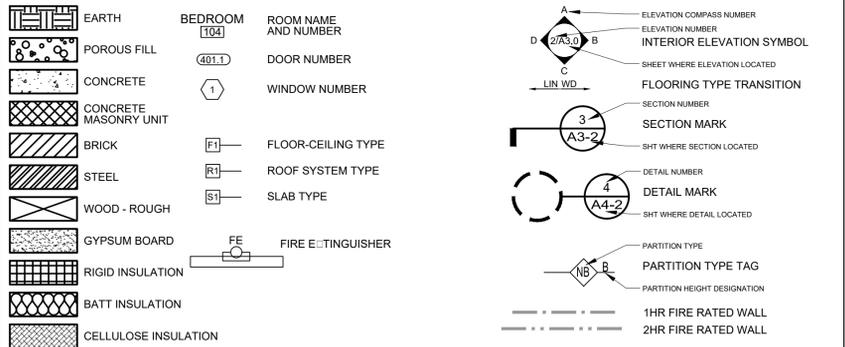

WALL AND PARTITION NOTES

GENERAL PARTITION NOTES: