


ULC Listed

7788F-C Series

Wireless Fire Alarm Communicators for IntelliNet

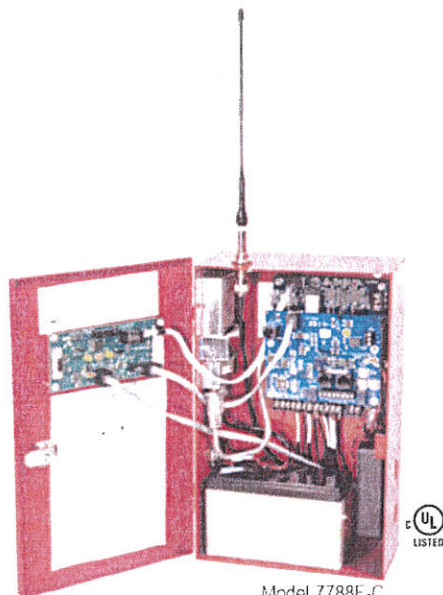

Model 7788F-C

Advanced Wireless Alarm Monitoring

As expensive dedicated landlines, required for ULC S 559 compliance disappear, and the future of GSM for alarm transmission becomes increasingly uncertain, the AES IntelliNet mesh radio network continues to offer unmatched reliability and speed in delivering wireless alarm signals to a central station without any third-party fees or reliance on networks operated by companies outside the alarm industry. The 7788F-C Series Subscribers provide the wireless communications link between the fire alarm panel and the central station receiver. Ideal for most commercial fire alarm applications, each 7788F-C Series Subscriber is housed in a full-sized, red, locked steel cabinet and supports a range of alarm panel inputs, including EOL fire, EOL supervised, and direct voltage from the panel (non-fire applications).

Supervised Operation

AES Subscribers offer fully-supervised operation that includes monitoring of operating power (both primary AC and battery back-up) and the connection to the mesh radio network. Each subscriber "checks-in" with the AES central station receiver at least once every 24 hours. The supervision check-in time can be set to as often as needed for the application, as appropriate for the network. Because the central station operates the wireless network, there is no additional cost for air time to transmit supervisory signals.

Full Data Reporting from Alarm Panel Digital Dialer

Model 7788F-C-ULP comes equipped with an IntelliPro-Fire Full Data Module (AES-7794) which enables reporting of full alarm data captured from the alarm panel's digital communicator. IntelliPro-Fire supports most alarm communication formats including Contact ID, Pulse, as well as Bosch Modem IIe and Modem IIIa2 (when converted to Contact ID format).

AES IntelliNet
CORPORATION

Features – All models

- ULC Listed commercial fire alarm applications
- ULC S 559 / ULC S 304
- Direct reporting to AES receiver across IntelliNet mesh radio network
- Each Subscriber acts as transmitter/receiver/repeater
- Simple and fast activation on network
- On board status LEDs for easy set up
- 8 programmable zone inputs
- Easy programming via AES handheld programmer or PC
- Rugged metal housing ideal for any commercial fire alarm application
- Narrowband compliant

Model 7788F-C-ULP with IntelliPro Fire also includes

- IntelliPro Fire transmits full alarm data from virtually any fire alarm panel digital communicator
- Alarm format support for Contact ID, Pulse, as well as Bosch Modem IIe and Modem IIIa
- Easy installation in AES subscriber
- Operates in applications with or without a phone line



Wireless mesh networking is an innovative technology adopted by many industries with applications that need to communicate data over a large geographic area with a high level of reliability at a low total cost of ownership.

The advanced design and 2-way communications capability provides easy installation, expansion, and management when compared to alternative communication methods, both wired and wireless.

7788F-C Series



Technical Specifications

7788F-C Series Subscriber

Dimensions

- 13.25"H x 8.5"W x 4.3"D
(34cm H x 21.5cm W x 11cm D)

Weight

- Approx. 7 pounds (3.2 kilograms),
excludes battery.

Radio Frequency

- Standard Frequency Range:
450-470MHz
(others available in 400-512MHz range)
- Output Power – 2 Watts

Antenna

- Included 2.5 db tamper resistant antenna
mounts on enclosure
- Multiple remote antenna options available

Power Input

- 16.5VAC, 40VA transformer (not included)
(ATC-Frost FPS 4016)

Backup Battery

- Will charge 12V battery up to 7.5 AH. Requires
12VDC 7.5 AH battery for UL 864.

Alarm Signal Inputs (subscriber)

- 7788F – 8 individually programmable zones
- 7744F – 4 individually programmable zones
and 4 reverse polarity inputs

ULC Standards

- CAN/ULC S 559-04
- CAN/ULC S 304

Antenna Cut / Communication

Trouble Output

- Form C relay; fail secure,
rated for 24 VDC 1A resistive

Reset Button

- Located on main circuit board.

Operating Temperature

- 0° to 50° C (32° to 122°F)

Storage Temperature

- -10° to 60° C (14° to 140°F)

Relative Humidity

- 0 to 85% RHC, Non Condensing

AES-7794 IntelliPro Fire

Packaged with 7788F-C-ULP

Input / Output Connections

- RJ11 connection to AES subscriber for module
data and power
- RJ11 connector for Handheld Programmer/
PC programming
- RJ31X Telco connections - T and R both in
and out via terminal strip and RJ45
- Alarm Panel digital communicator T and R
both in and out via terminal strip and RJ45
- Trouble output: Form C relay detects if
Subscriber is off the network

Alarm Formats

- Support for Contact ID and Pulse formats as
well as Modem IIe and Modem IIIa2 converted
to CID

Size

- 2.8 x 5.0 inches (7.1cm x 12.7cm)

Power Requirements

- 12 VDC nominal - primary and backup power
provided by the AES 7788F-C or other
Subscriber

How to Order

Model	Description
7788F-C	8 Zone Fire Alarm Subscriber

7788F-C-ULP 7788F Fire Alarm Subscriber with
IntelliPro Fire full data module

Optional Accessories

7041E	Subscriber Handheld Programmer
7794	IntelliPro Fire Full Data Module
1640-C	Plug-in Transformer: 16.5VAC, 40VA



AES IntelliNet is a leading provider of fire and burglar alarm systems and networks for fire and burglar alarm systems. From residential, corporate, government, and educational applications, we provide the most advanced and advanced fire and burglar alarm systems. Users of AES IntelliNet systems have benefited from the advanced communications and monitoring systems. AES IntelliNet alarm monitoring systems are designed to provide 24-hour fire and burglar alarm monitoring services.



For more information
Call 800-AES-NETS (800-237-6387)

AES Corporation 285 Newbury Street Peabody, MA 01960 USA
Tel. +1 978-535-7310 Fax +1 978-535-7313
Email info@aes-intellinet.com Web www.aes-intellinet.com

Copyright 2012 AES Corporation
AES-IntelliNet is a registered trademark of
AES Corporation

7788F-C/7/12/R2