




1
3 BITUMINOUS PAVEMENT- ROADS + PARKING
NOT TO SCALE

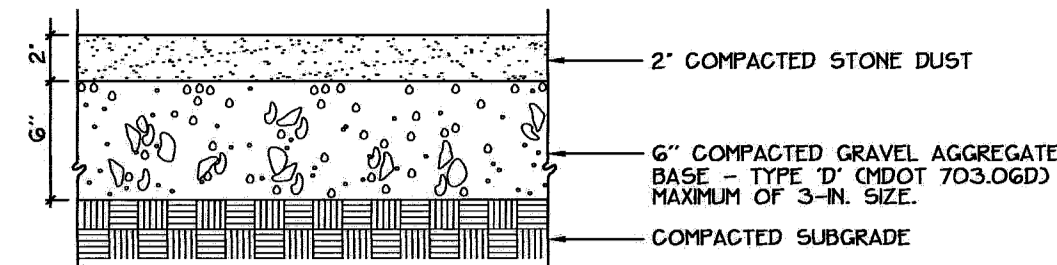


6
3 STONE DUST WALK
NOT TO SCALE

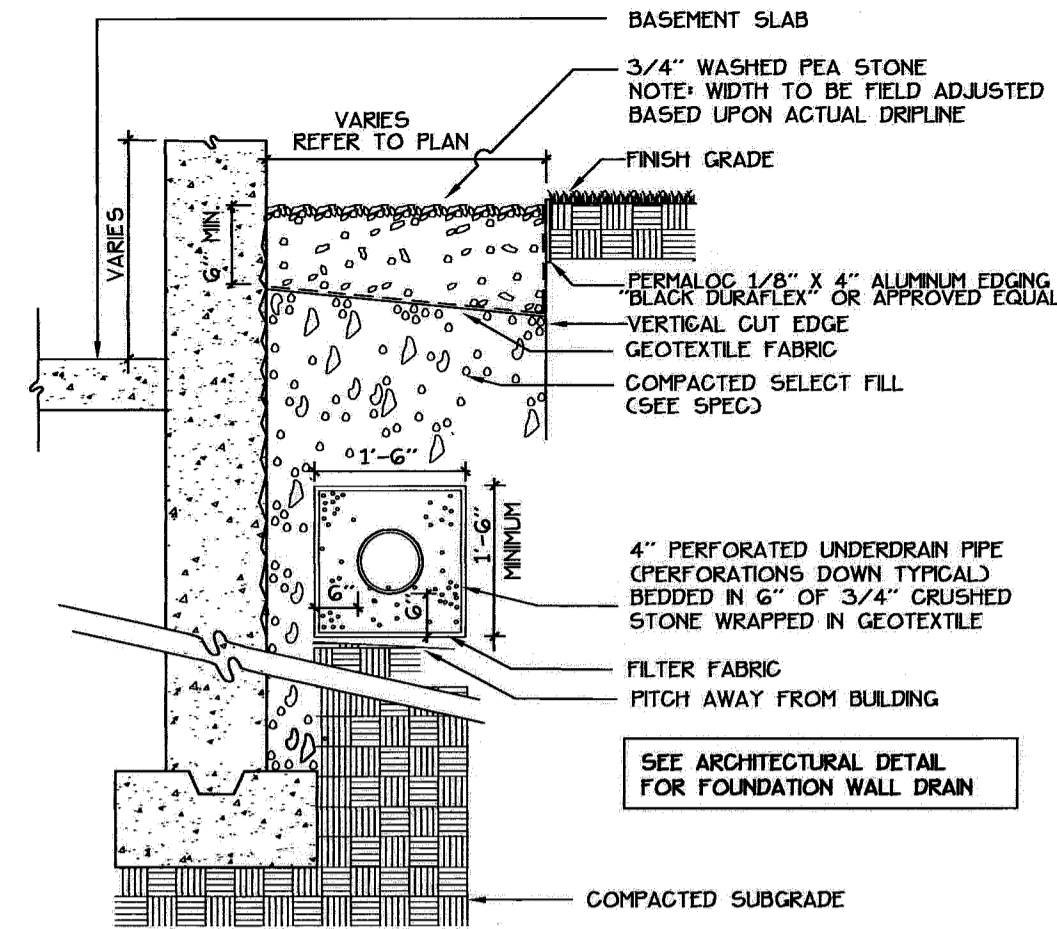


10
3 DRIP STRIP AND FOUNDATION UNDERDRAIN
NOT TO SCALE

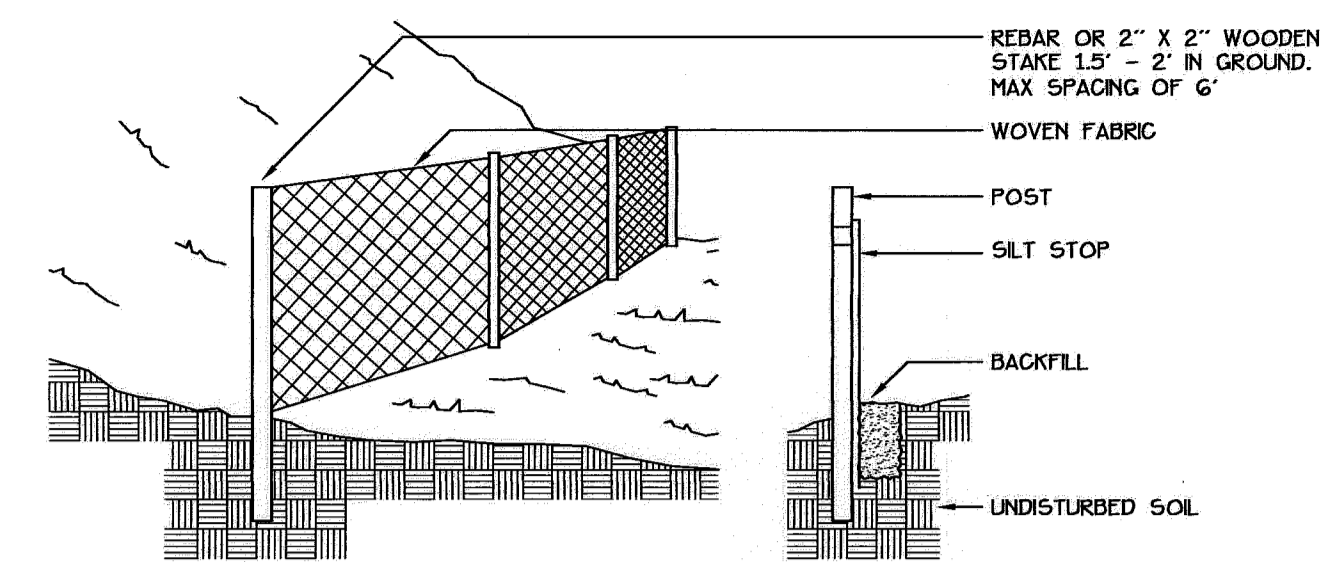


- SILT FENCE TO BE INSTALLED PARALLEL TO EXISTING CONTOURS DOWNSLOPE FROM AREAS OF SOIL DISTURBANCE.
- SILT FENCE TO BE SECURELY ATTACHED TO THE UPSLOPE SIDE OF THE SUPPORTING STAKES.
- BOTTOM 4 TO 6 INCHES OF SILT FENCE TO BE BURIED IN SLOPE AND BACKFILLED WITH COMPACTED SOIL.
- INSPECTION SHALL BE MADE AFTER EVERY RAINFALL WITH REMOVAL OF EXCESSIVE SEDIMENT AND REPAIR OF THE FENCE ACCOMPLISHED PROMPTLY.
- SILT FENCE AND AGGREGATED SEDIMENT SHALL BE REMOVED AS SOON AS PERMANENT EROSION CONTROL MEASURES HAVE BEEN ESTABLISHED.

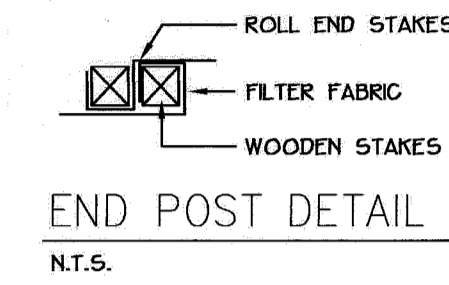


13
3 SILT FENCE
NOT TO SCALE

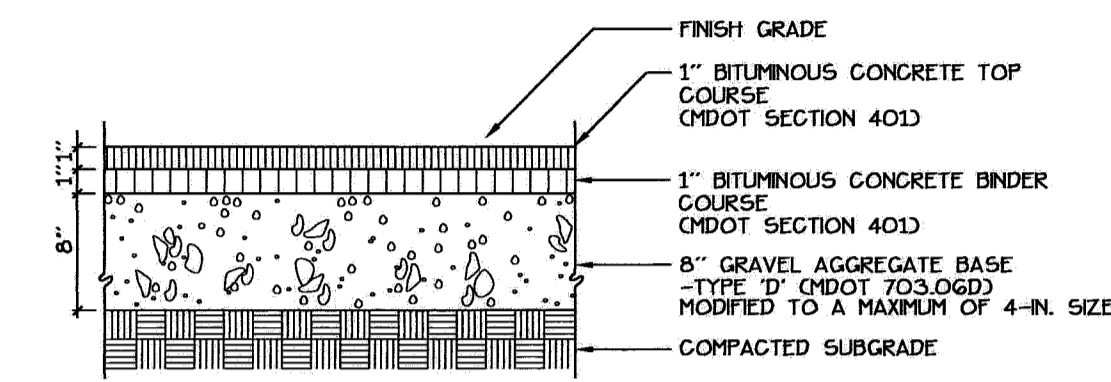

2
3 BITUMINOUS SIDEWALK
NOT TO SCALE

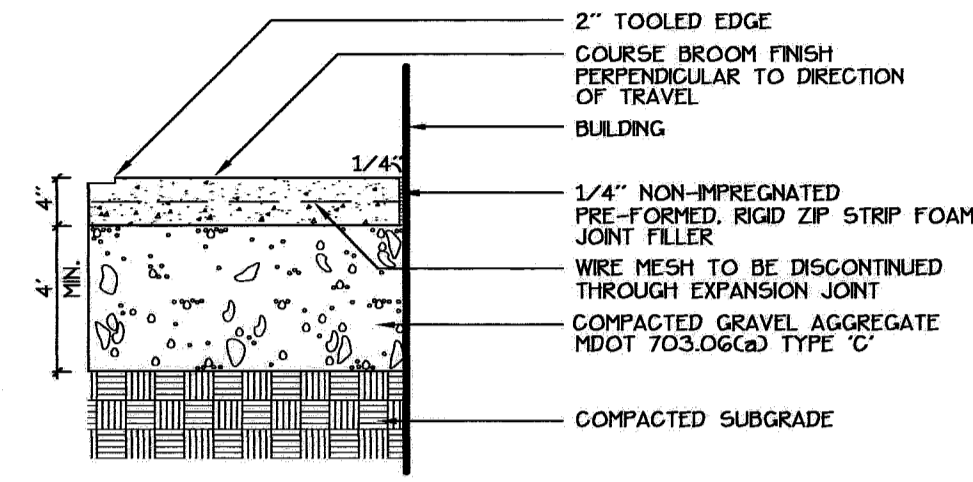


7
3 CONCRETE ENTRY SLAB
NOT TO SCALE

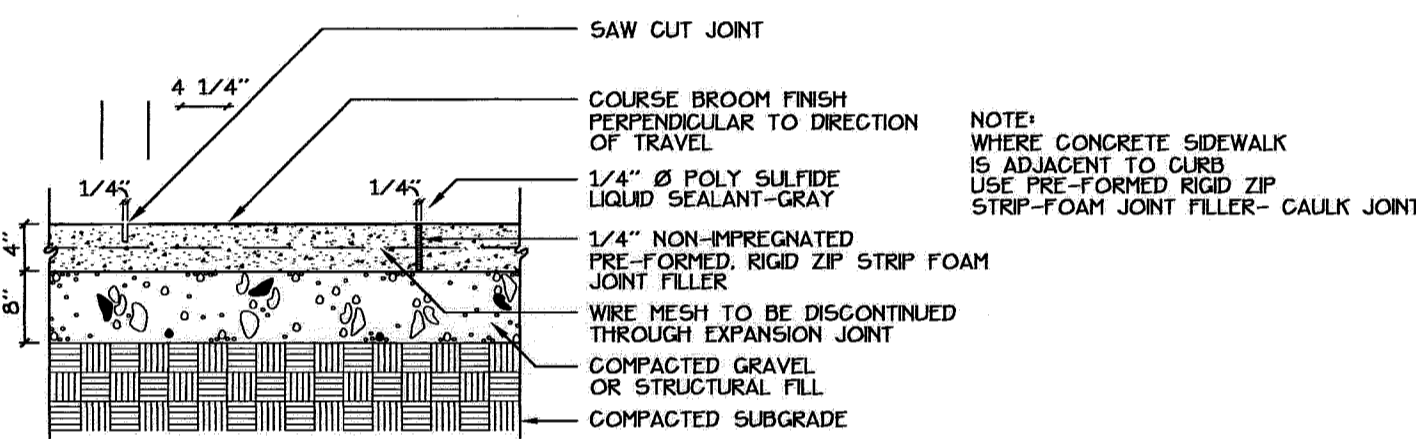


3
3 CONCRETE WALK
NOT TO SCALE


REFER TO SPECIFICATIONS FOR GRANITE BENCH INFORMATION- SWENSON GRANITE WORKS, CLASSIC LARGE RECTANGULAR BENCH

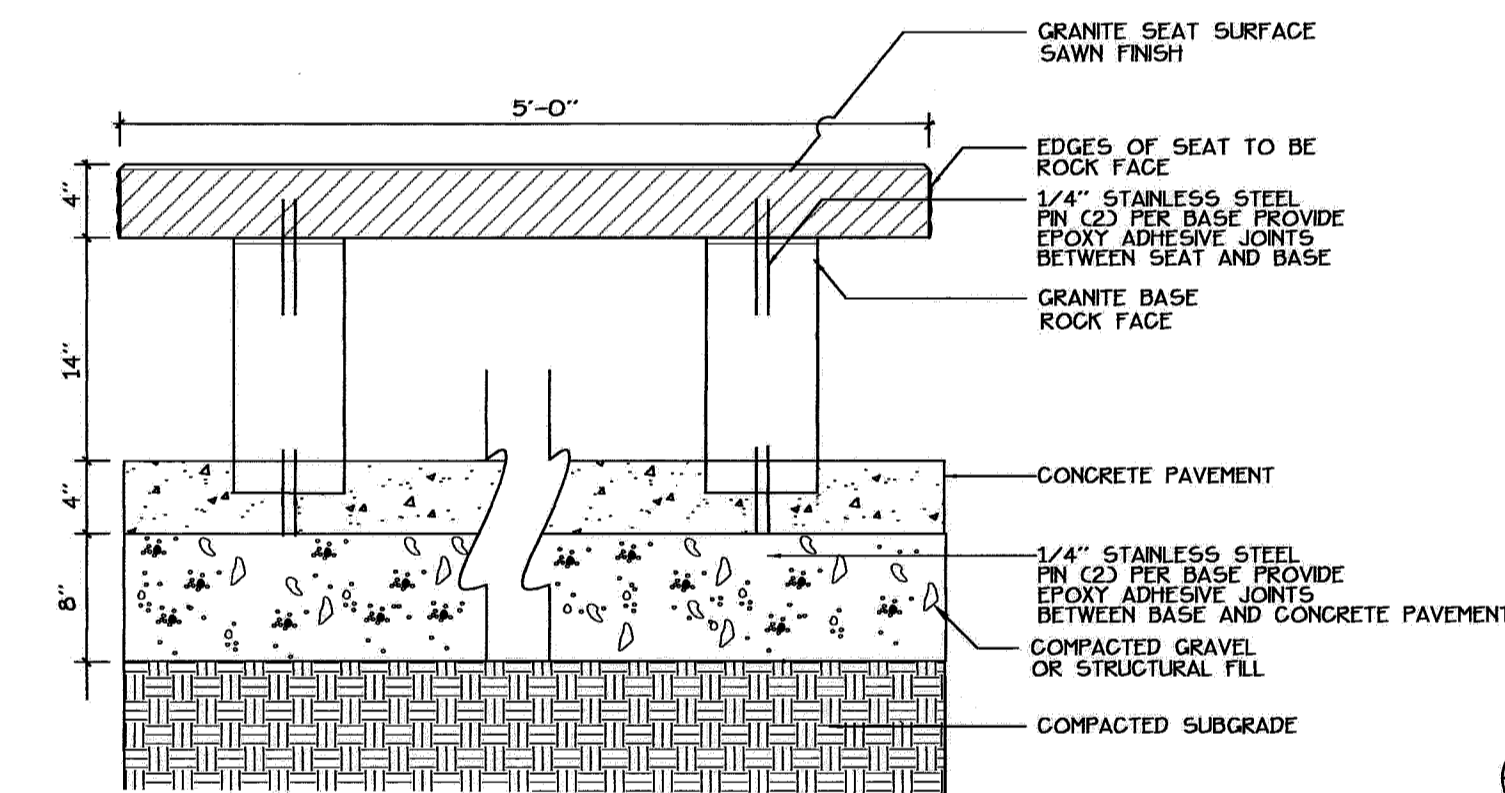


8
3 GRANITE BENCH DETAIL
NOT TO SCALE

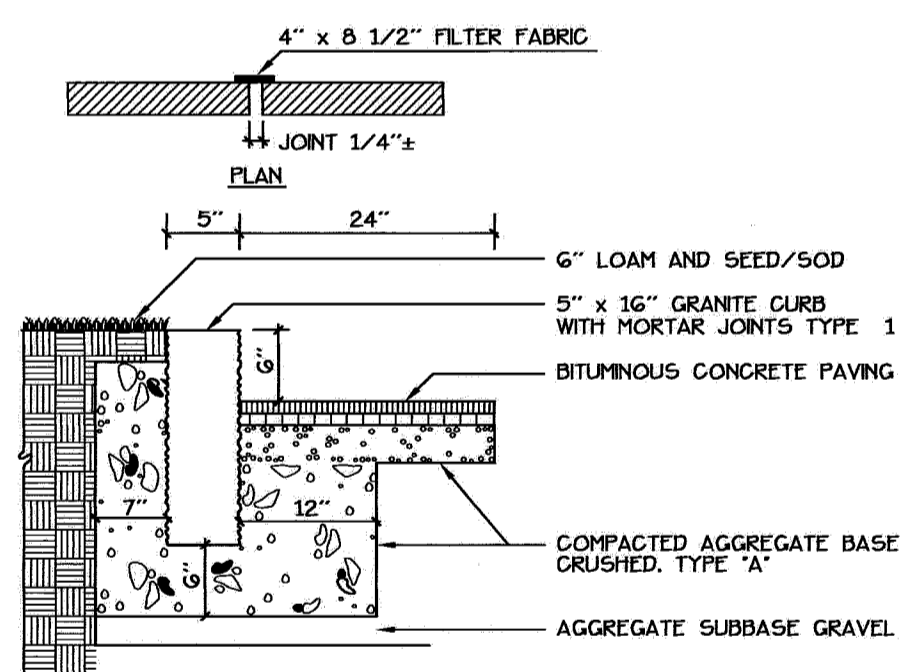

4
3 VERTICAL GRANITE CURB
NOT TO SCALE

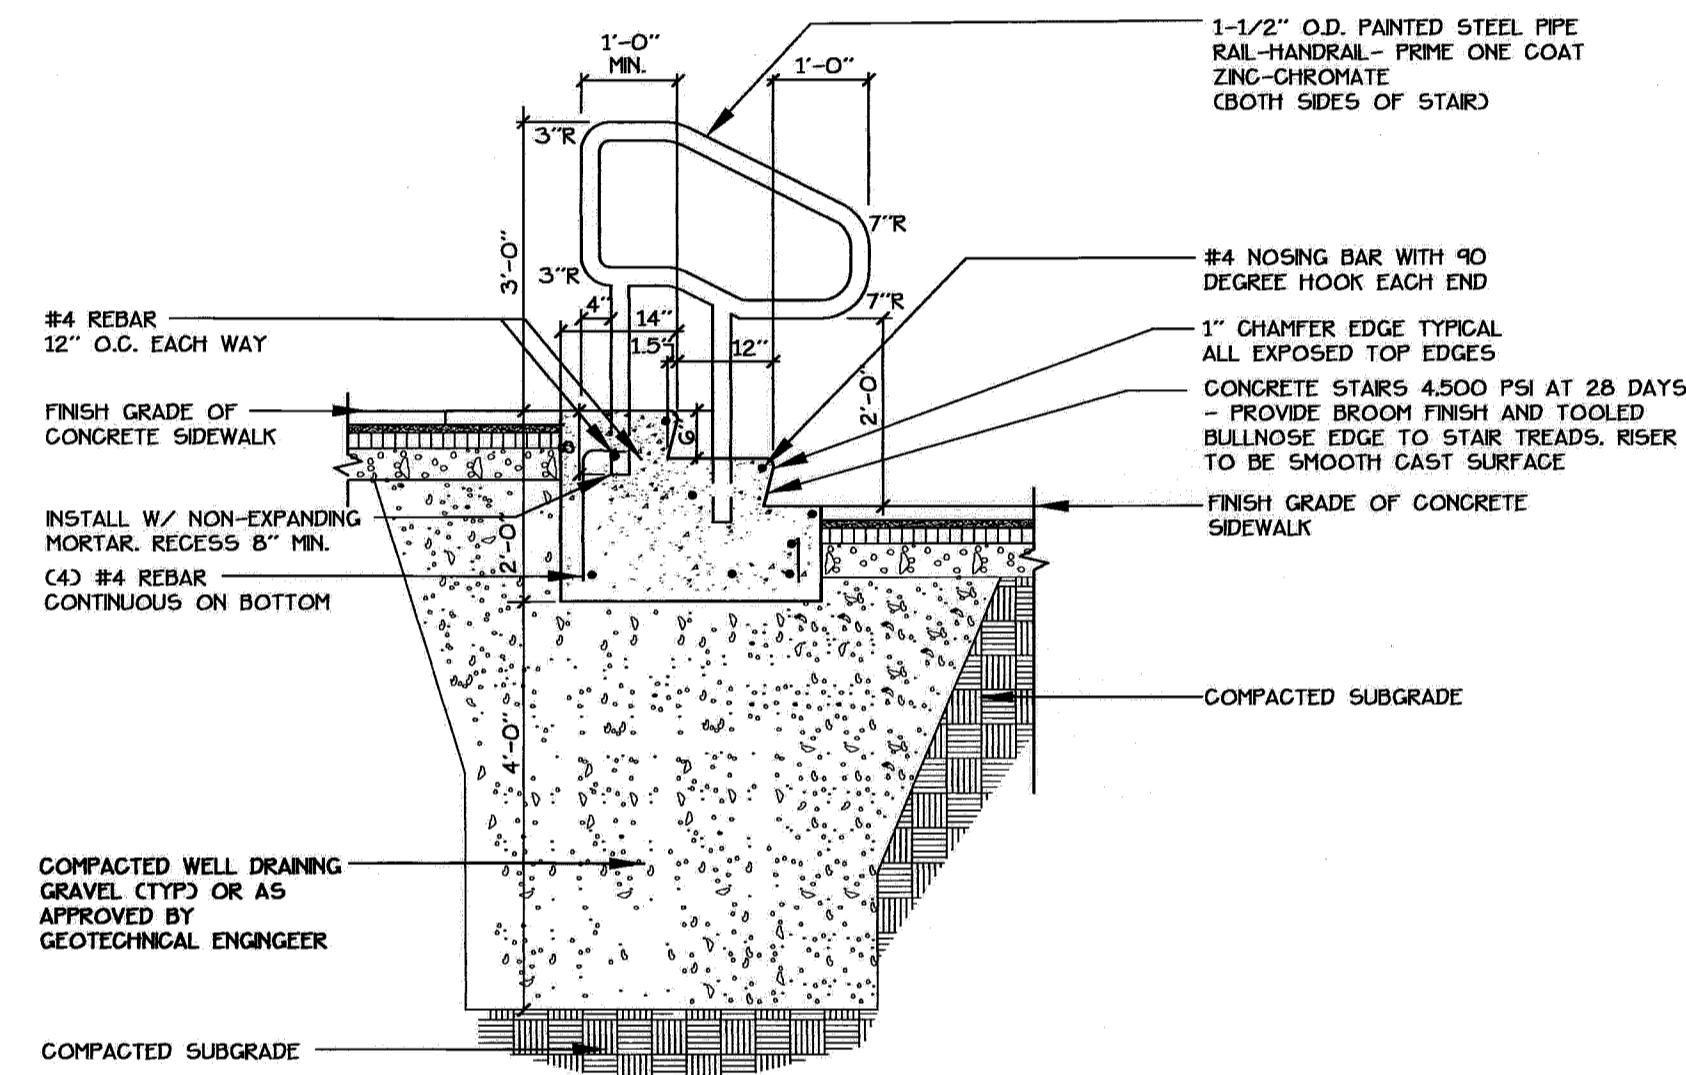

11
3 CONCRETE STAIR + HANDRAIL
NOT TO SCALE

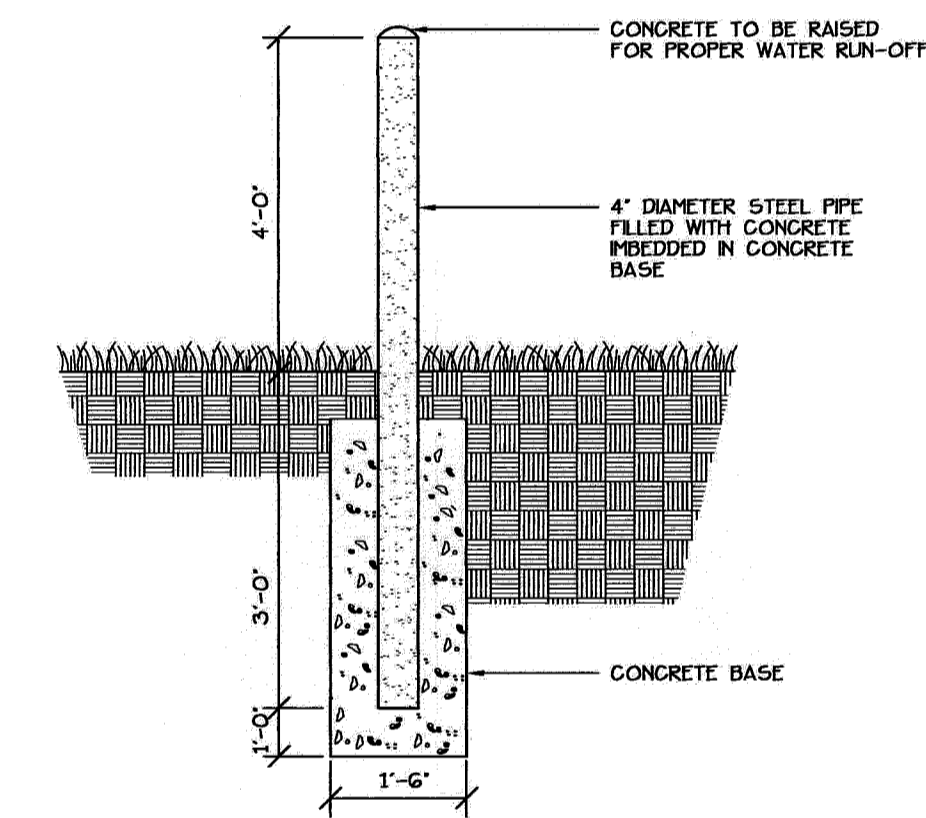

14
3 BOLLARD DETAIL
NOT TO SCALE

NOTES


DIG HOLE AT LEAST 2 TIMES THE WIDTH OF ROOT BALL AND AS DEEP AS THE ROOT BALL (NO DEEPER). SET ROOT BALL CENTERED, WITH TOP AT GROUND LEVEL OR SLIGHTLY HIGHER. CORRECT HOLE DEPTH AS NEEDED.

FOR DECIDUOUS AND NEEDLED EVERGREEN TREES AND SHRUBS 1 FULL WHEELBARROW EXISTING SOIL, 2 SHOVELS PEAT, 1 SHOVEL WELL ROTTED MANURE, OR OTHER COMPOSTED ORGANIC MATERIAL, FOR BROADLEAVED EVERGREENS AND RELATED ESCALC PLANTS, 1 FULL WHEELBARROW EXISTING SOIL, 3-4 SHOVELS PEAT, 1 SHOVEL WELL ROTTED MANURE, OR OTHER COMPOSTED ORGANIC MATERIAL OF LOW pH (RECOMMENDATIONS ARE FOR ACCEPTABLE PLANTING AREAS).


CONTAINER GROWN STOCK: REMOVE CONTAINER PROTECTING ROOT BALL. GENTLY COMB OUT ROOTS, PRUNE DAMAGED ROOTS.

BACKFILL 2/3 OF HOLE WITH AMENDED SOIL THEN FILL HOLE WITH WATER. LET DRAIN, REPEAT WATER AND DRAIN. BACK FILL TO FINISH GRADE, TAMP GENTLY, AND CREATE EARTH SAUCER. WATER THOROUGHLY ONCE AGAIN TO REMOVE REMAINING AIR POCKETS.


2" X 2" OF 2 1/2" DIAMETER STAKES WITH 2 #12 GAUGE WIRES ENCASED IN 2-PLY REINFORCED RUBBER HOSE 1/2" DIAMETER OR CHARLOCK AS APPROVED BY LANDSCAPE ARCHITECT. 2 STAKES LOCATED 180° APART (STAKES SHALL BE FIRMLY SET TO PROVIDE NECESSARY TENSION).

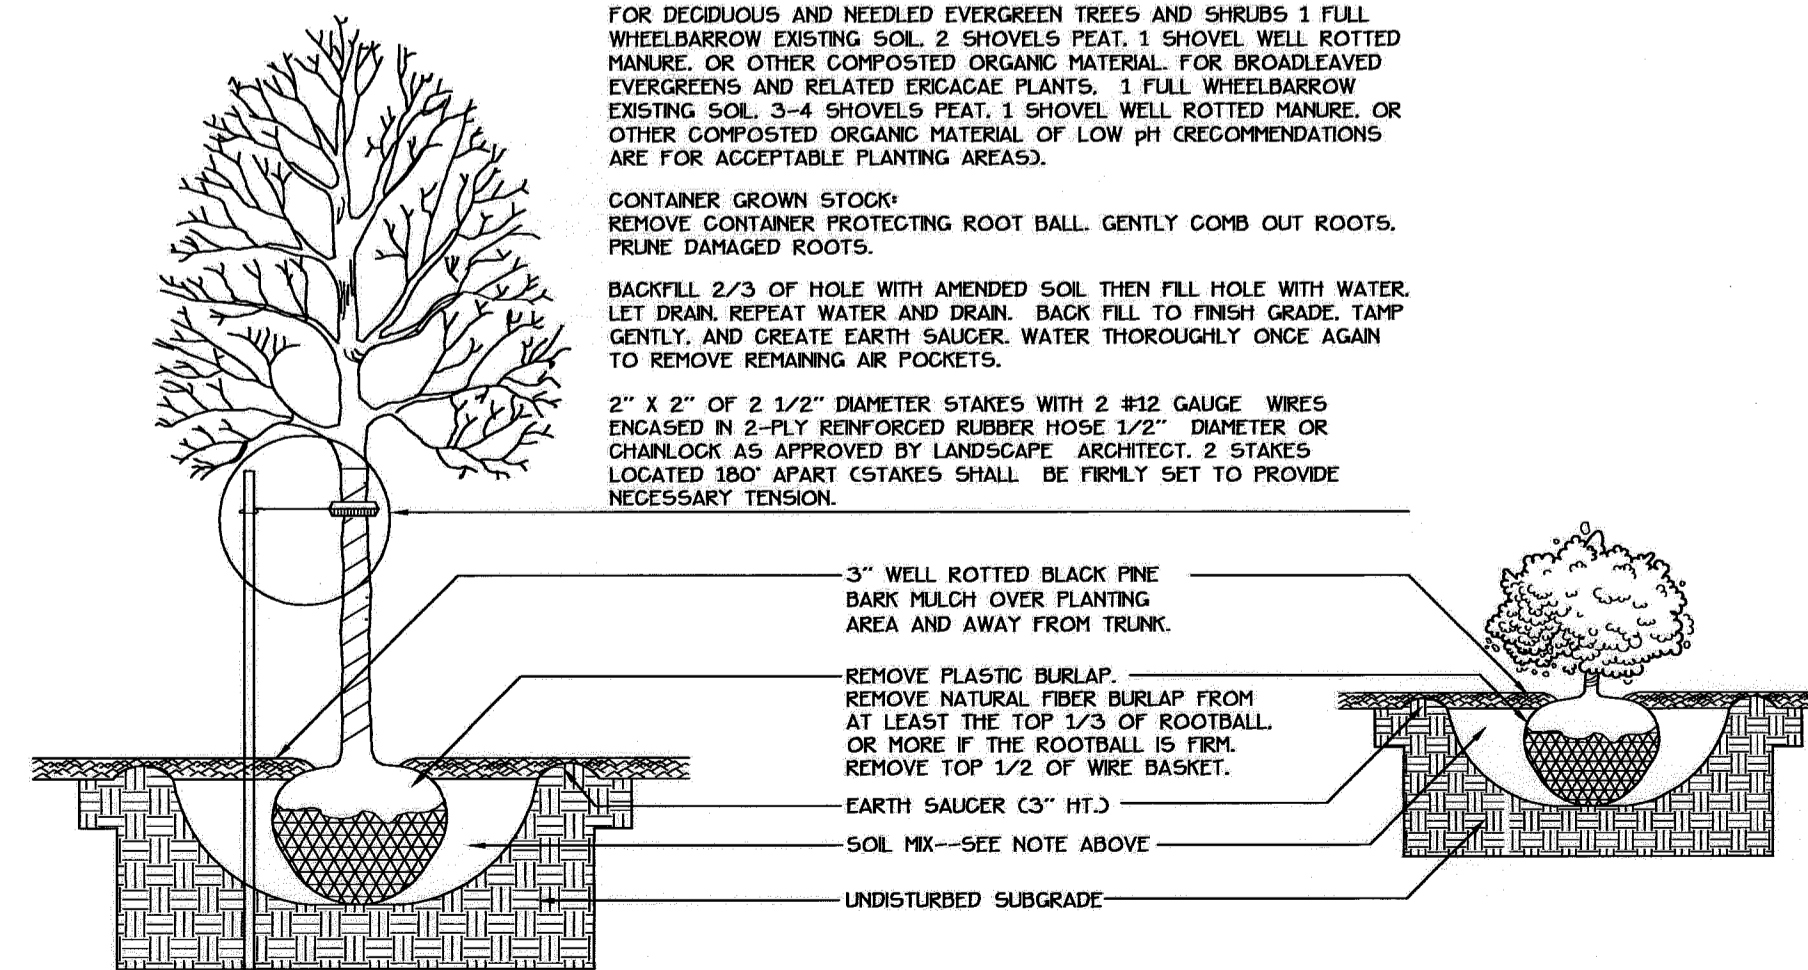

12
3 TREE AND SHRUB INSTALLATION
NOT TO SCALE

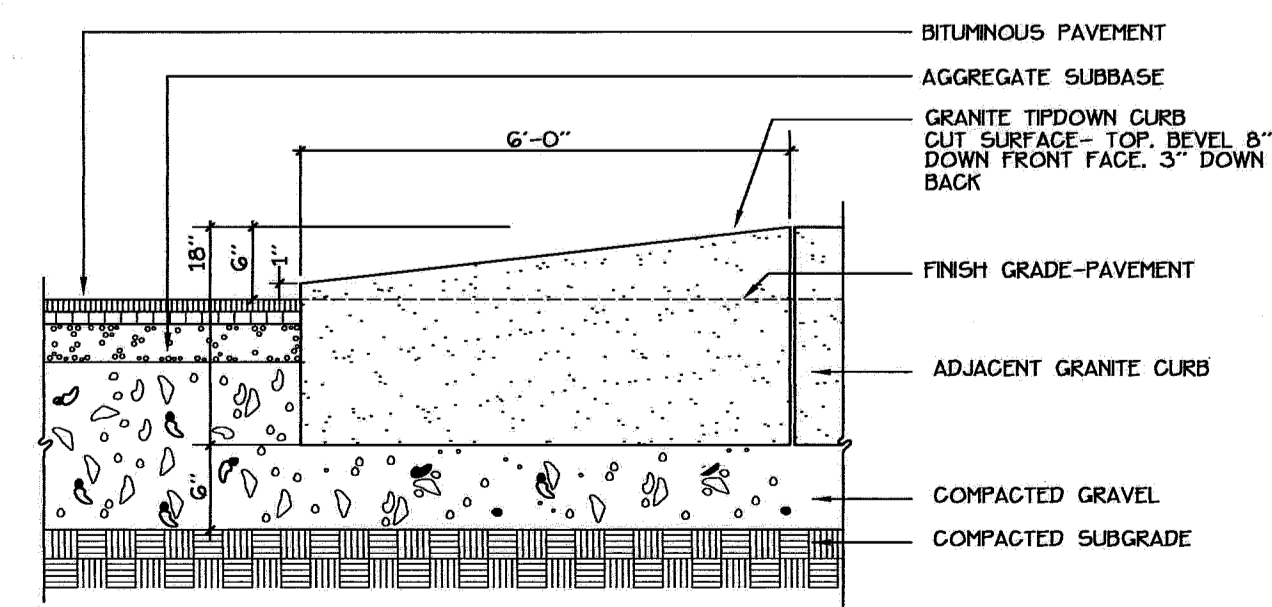

5
3 GRANITE TIP-DOWN CURB
NOT TO SCALE

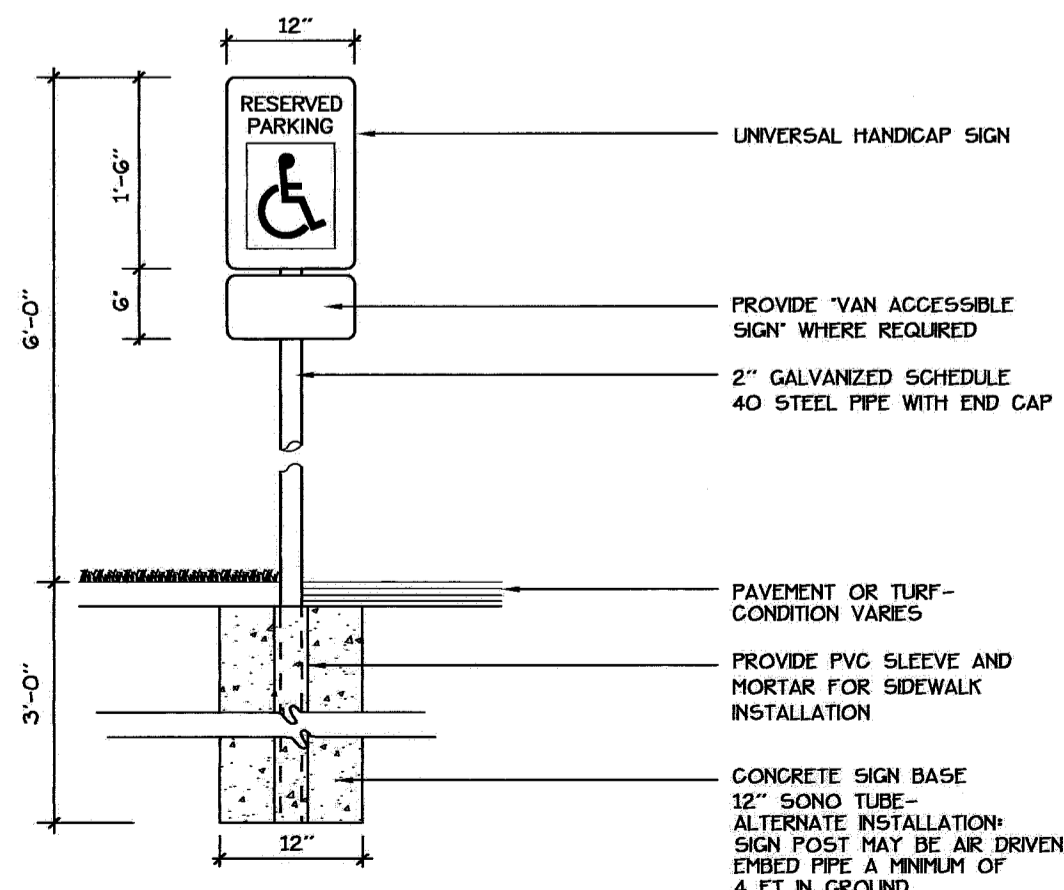

9
3 HANDICAP PARKING SIGNAGE OR REGULATORY SIGNS
NOT TO SCALE

NOTE: ALL REGULATORY SIGNS SHALL CONFORM TO MDOT OR NATIONAL HIGHWAY STANDARDS- SIGN HEIGHT TO BE 6 FT HIGH TO BOTTOM OF SIGN.

Prepared For:

Owner:
Avesta Housing
307 Cumberland Avenue
Portland, Maine 04101

Prepared By:

MITCHELL & ASSOCIATES
Landscape Architects
The Staples School
70 Center Street
Portland, Maine 04101
Tel: (207) 774-4427

Munjoy Commons: Shailer
Portland, Maine
North Street

Date:

AUGUST 28, 2009

Issued For:

BIDDING AND PERMITTING

Revisions:

Reproduction or reuse of this document without the expressed written consent of Mitchell & Associates is prohibited.

Title:

SITE DETAILS

Scale:

AS NOTED

Sheet No.:

3

