

NFW2-100 Fire Alarm Control Panel

Protected Premises: <u>West End Place</u>	Date: <u>5/5/2014</u>
Address: <u>44 Pine Street</u>	
City: <u>Portland</u> State: <u>ME</u>	Zip: <u>04102</u>
Prepared By: <u>Norris Inc.</u>	Phone: <u>207-883-3473</u>
Address: <u>2257 Broadway</u>	Email: _____
City: <u>South Portland</u> State: <u>ME</u>	Zip: <u>04106</u>

AC Branch Current Requirements 3.00 AMPS @ 120 VAC

Current required by source to power the fire alarm system.

Primary Standby Load 0.15 Amps

Current load on the primary power supply during **non-alarm** conditions.

Primary Alarm Load 1.70 Amps

Current load on the primary power supply during **alarm** conditions.

Secondary Load Requirements 5.32 Amp Hours

Total Secondary Load from the calculation table below.

Current Draw		Time (hours)	Total (AH)
Secondary Standby Load 0.178 A	x	Required Standby Time	
		24 hours	4.27
Secondary Alarm Load 1.971 A	x	Required Alarm Time (hours)	
		0.084 hours	0.17
Total Secondary Load			4.43
Derating factor			x 1.2
Secondary Load Requirements			5.32

AH

Battery Selection 18 Amp Hours


Select batteries from the list below.

18 AH BAT-12180 Battery (12 volt)

- Two
 Four (two 12VDC sets in parallel)

Battery Distribution Chart

Shows amp-hour distribution of your selections.

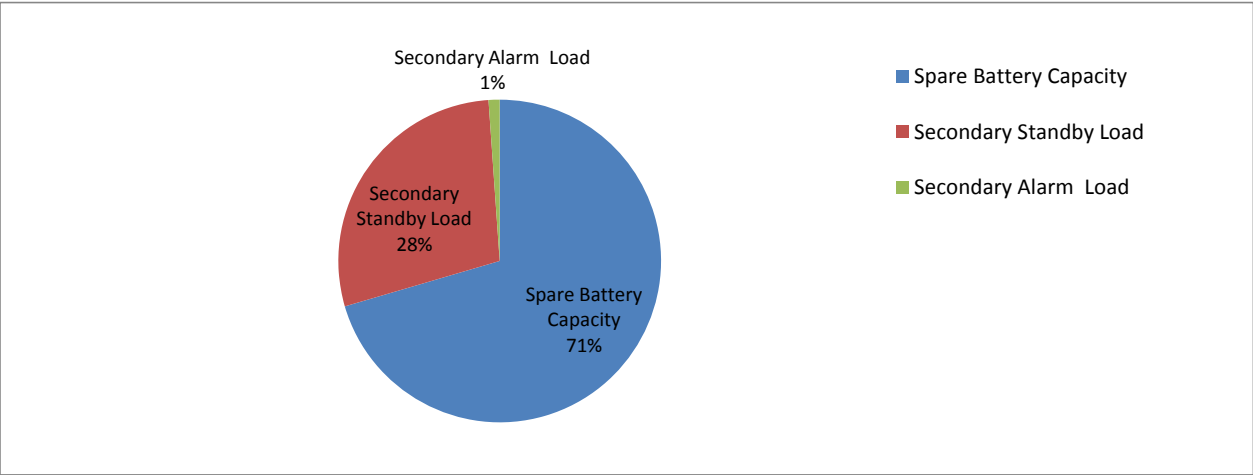

Comments

- 1. Batteries will fit in the FACP cabinet.
- 2. Selected battery size meets secondary load requirements.
- 3. The selected batteries (18AH) are within the charger range of this power supply (7-18AH).

Spare Battery Capacity	12.68	Battery Selection (AH) - Secondary Load Requirements (AH)
Secondary Standby Load	5.12	Secondary Standby Load (AH) * Derating Factor
Secondary Alarm Load	0.20	Secondary Alarm Load (AH) * Derating Factor