

© 2013 RYAN SENATORE ARCHITECTURE

RENOVATIONS TO  
135 CONGRESS STREET  
PORTLAND, MAINE



RYAN SENATORE  
ARCHITECTURE  
565 CONGRESS STREET, STE. 304  
PORTLAND, MAINE 04101  
207.650.6414  
senatorearchitecture.com

CONSULTANTS:  
STRUCTURAL:  
Structural Integrity  
77 Oak Street  
Portland, ME 04101  
207.774.4614

REVISIONS:

DATE: AUGUST 23, 2013

PROJECT No. 1317


DRAWN BY: RJS / RRT

CHECKED BY: RJS

SCALE: AS NOTED

SHEET TITLE:  
WINDOW  
SCHEDULE

A7-0

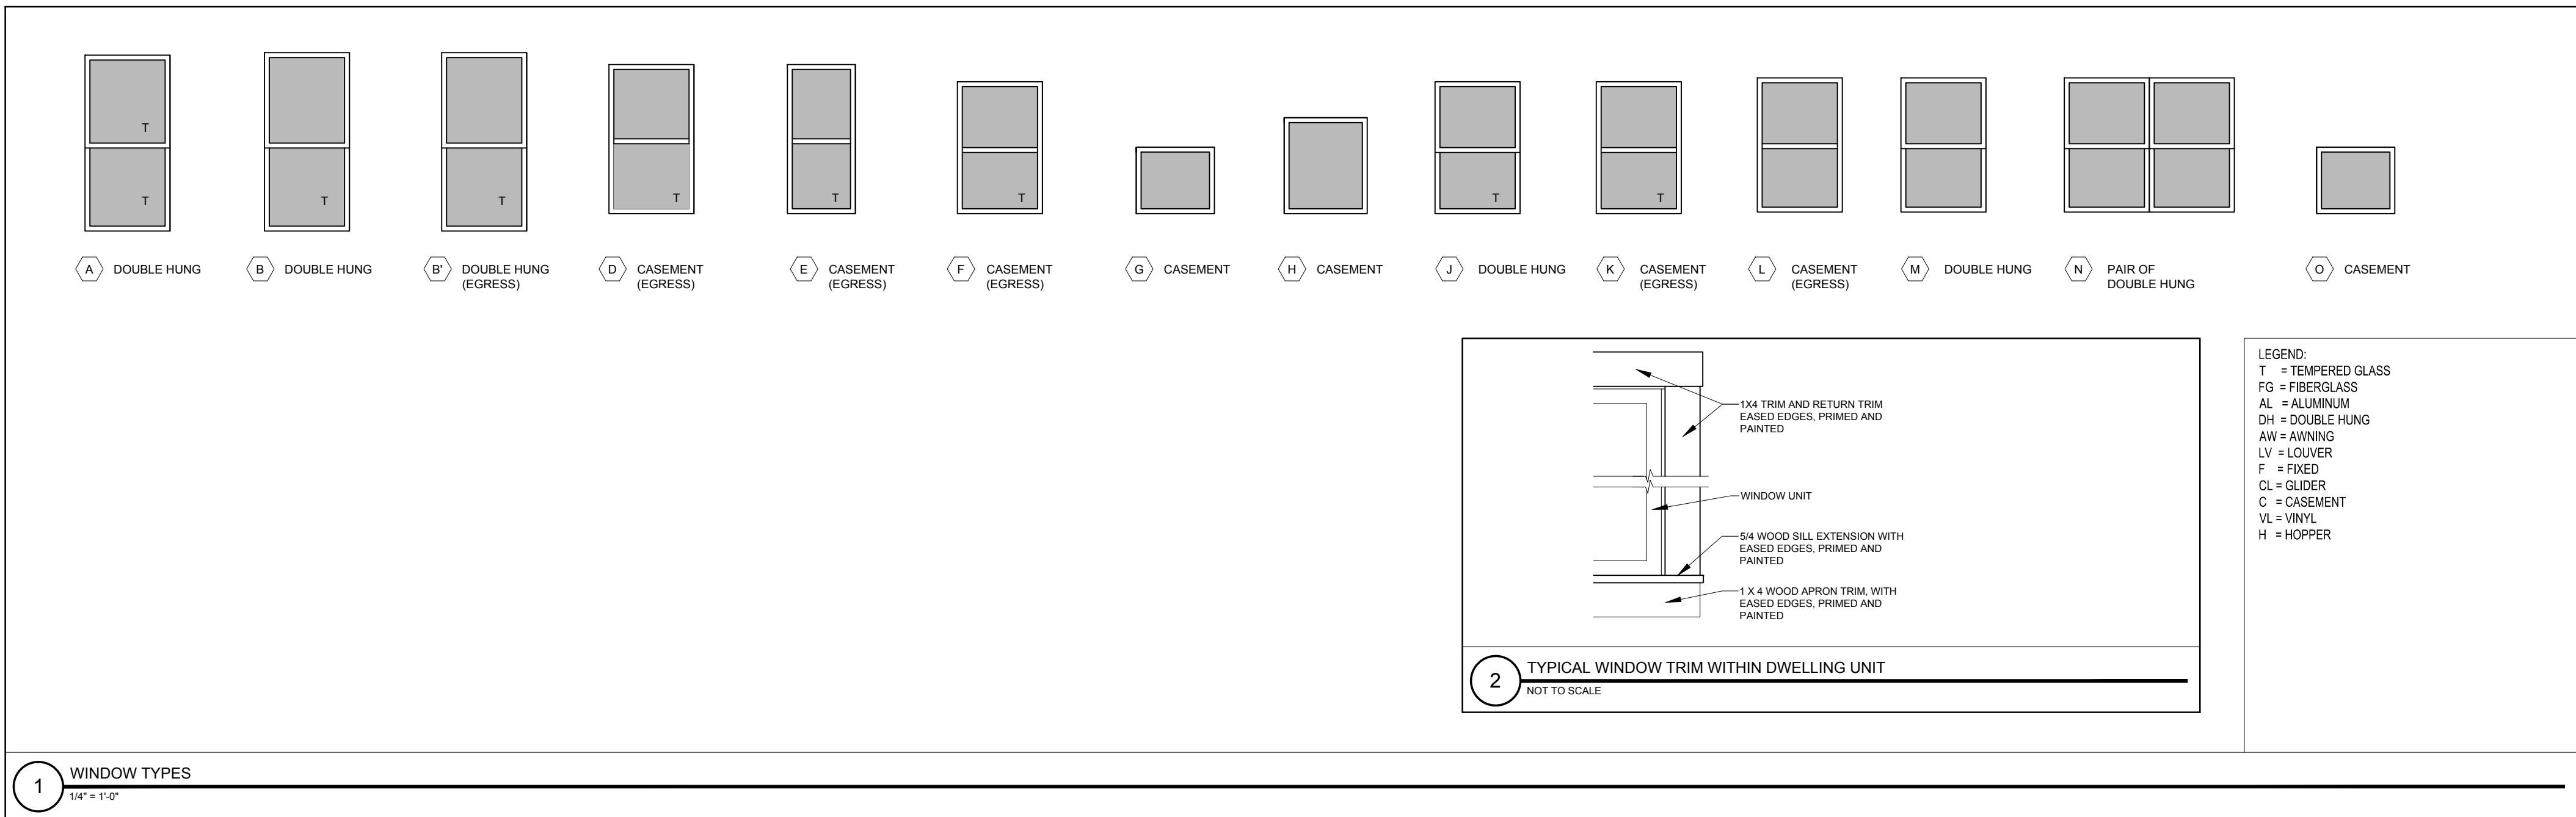

WINDOW SCHEDULE									
KEY	ACTION	ROUGH ★ OPENING (WxH) VIF	R.O. HEAD HEIGHT FROM SUB FLOOR	DETAILS			MATERIAL	FINISH	REMARKS
				HEAD	JAMB	SILL			
A	DH	2'-10-1/2" X 6'-0-1/2"	-	-	-	-	VL	-	NAILING FLANGE, TEMPERED
B	DH	2'-10-1/2" X 6'-1-1/2"	-	-	-	-	VL	-	NAILING FLANGE, TEMPERED
B'	DH	2'-10-1/2" X 6'-1-1/2"	-	-	-	-	VL	-	NAILING FLANGE, TEMPERED, EGRESS
D	C	2'-10-1/2" X 5'-1-1/2"	-	-	-	-	VL	-	NAILING FLANGE, TEMPERED, EGRESS, SIMULATED MID CHECK RAIL (WIDE STYLE)
E	C	2'-3-1/2" X 5'-1-1/2"	-	-	-	-	VL	-	NAILING FLANGE, TEMPERED, EGRESS, SIMULATED MID CHECK RAIL (WIDE STYLE)
F	C	2'-10-1/2" X 4'-6-1/2"	-	-	-	-	VL	-	NAILING FLANGE, TEMPERED, EGRESS, SIMULATED MID CHECK RAIL (WIDE STYLE)
G	C	2'-8-1/2" X 2'-3-1/2"	-	-	-	-	VL	-	NAILING FLANGE
H	C	2'-10-1/2" X 3'-3-1/2"	-	-	-	-	VL	-	NAILING FLANGE
J	DH	2'-10-1/2" X 4'-6-1/2"	-	-	-	-	VL	-	NAILING FLANGE, TEMPERED
K	C	2'-10-1/2" X 4'-6-1/2"	-	-	-	-	VL	-	NAILING FLANGE, TEMPERED, EGRESS, SIMULATED MID CHECK RAIL (WIDE STYLE)
L	C	2'-10-1/2" X 4'-6-1/2"	-	-	-	-	VL	-	NAILING FLANGE, EGRESS, SIMULATED MID CHECK RAIL (WIDE STYLE)
M	DH	2'-10-1/2" X 4'-6-1/2"	-	-	-	-	VL	-	NAILING FLANGE
N	DH	5'-8-1/2" X 4'-6-1/2"	-	-	-	-	VL	-	NAILING FLANGE, FACTORY MULLED PAIR OF DOUBLEHUNG UNITS
O	C	2'-8-1/2" X 2'-3-1/2"	-	-	-	-	VL	-	NAILING FLANGE

- WINDOW NOTES:
- ★ 1.) COORDINATE AND ADJUST ROUGH OPENING DIMENSIONS TO ACCOMMODATE SILL PAN FLASHING SYSTEM
  - 2.) PROVIDE MULL REINFORCING AT ALL MULTI-UNIT WINDOWS AS REQUIRED TO ACHIEVE DP-50 RATING
  - 3.) CONTRACTOR TO FIELD VERIFY SIZE OF REPLACEMENT WINDOWS IN EXISTING OPENINGS BEFORE WINDOWS ARE ORDERED FROM THE FACTORY
  - 4.) FULL SCREENS ALL OPENINGS
  - 5.) PROVIDE 4" SASH LIMITERS ON ALL NON-EGRESS OPENINGS
  - 6.) PROVIDE 'GUARDIAN ANGE' WINDOW GUARDS ([www.angelguards.com](http://www.angelguards.com)) AT ALL EGRESS WINDOWS WITH SILLS BELOW 24" ABOVE FINISHED FLOOR
  - 7.) CONTRACTOR TO VERIFY THAT ALL EGRESS OPENINGS MEET EGRESS REQUIREMENTS
  - 8.) ALL GLAZING LOCATED WITHIN 18" OF FINISHED FLOOR TO BE TEMPERED GLASS
  - 9.) ALL EXTERIOR GLAZING TO BE INSULATED
  - 10.) FRAME ALL OPENINGS WITH ELEVATIONS
  - 11.) SEAL WINDOW TO ROUGH OPENING WITH LOW EXPANDING FOAMINSULATION - SEE DETAILS