


TYPE	DESCRIPTION	MFR.	LAMPS	MOUNTING	NOTES
A	2x3 LAMP ACRYLIC LENSED TROFFER WITH ELECTRONIC BALLAST.	COLUMBIA	3-17W T8	RECESSED	
B	2x4 LAMP ACRYLIC LENSED TROFFER WITH ELECTRONIC BALLAST.	COLUMBIA	4PS24-2326- T8	RECESSED	
C	4' FLUORESCENT INDUSTRIAL WITH REFRACTIVE LENS, PROVIDE WITH RADIO INTERFERENCE FILTER AND 2 BALLASTS.	COLUMBIA	2-32W T8 CHAIN HUNG K4-232-EB8-277-KLMC4	8'-0" AFF.	
D	2x4 FLUORESCENT WITH HOLOPHANE 8224 REFRACTIVE LENS, PROVIDE WITH RADIO INTERFERENCE FILTER AND 2 BALLASTS.	COLUMBIA	4-32W T8 FS24-432-277-4100K	RECESSED	PROVIDE FLANGE KIT
E	2x2 FLUORESCENT WITH HOLOPHANE 8224 REFRACTIVE LENS, PROVIDE WITH RADIO INTERFERENCE FILTER AND ELECTRONIC BALLAST.	COLUMBIA	3-17W T8 FS22-317F-277-4100K	RECESSED	PROVIDE FLANGE KIT
	EMERGENCY BATTERY PACK LIGHTING UNIT. PROVIDE WITH SELF TESTING ELECTRONICS AND CLEAR PROTECTIVE SHIELD.	DUAL-LITE	1-72W INCANDESCENT	WALL MOUNT 7'-6" AFF.	

LIGHT FIXTURE SCHEDULE

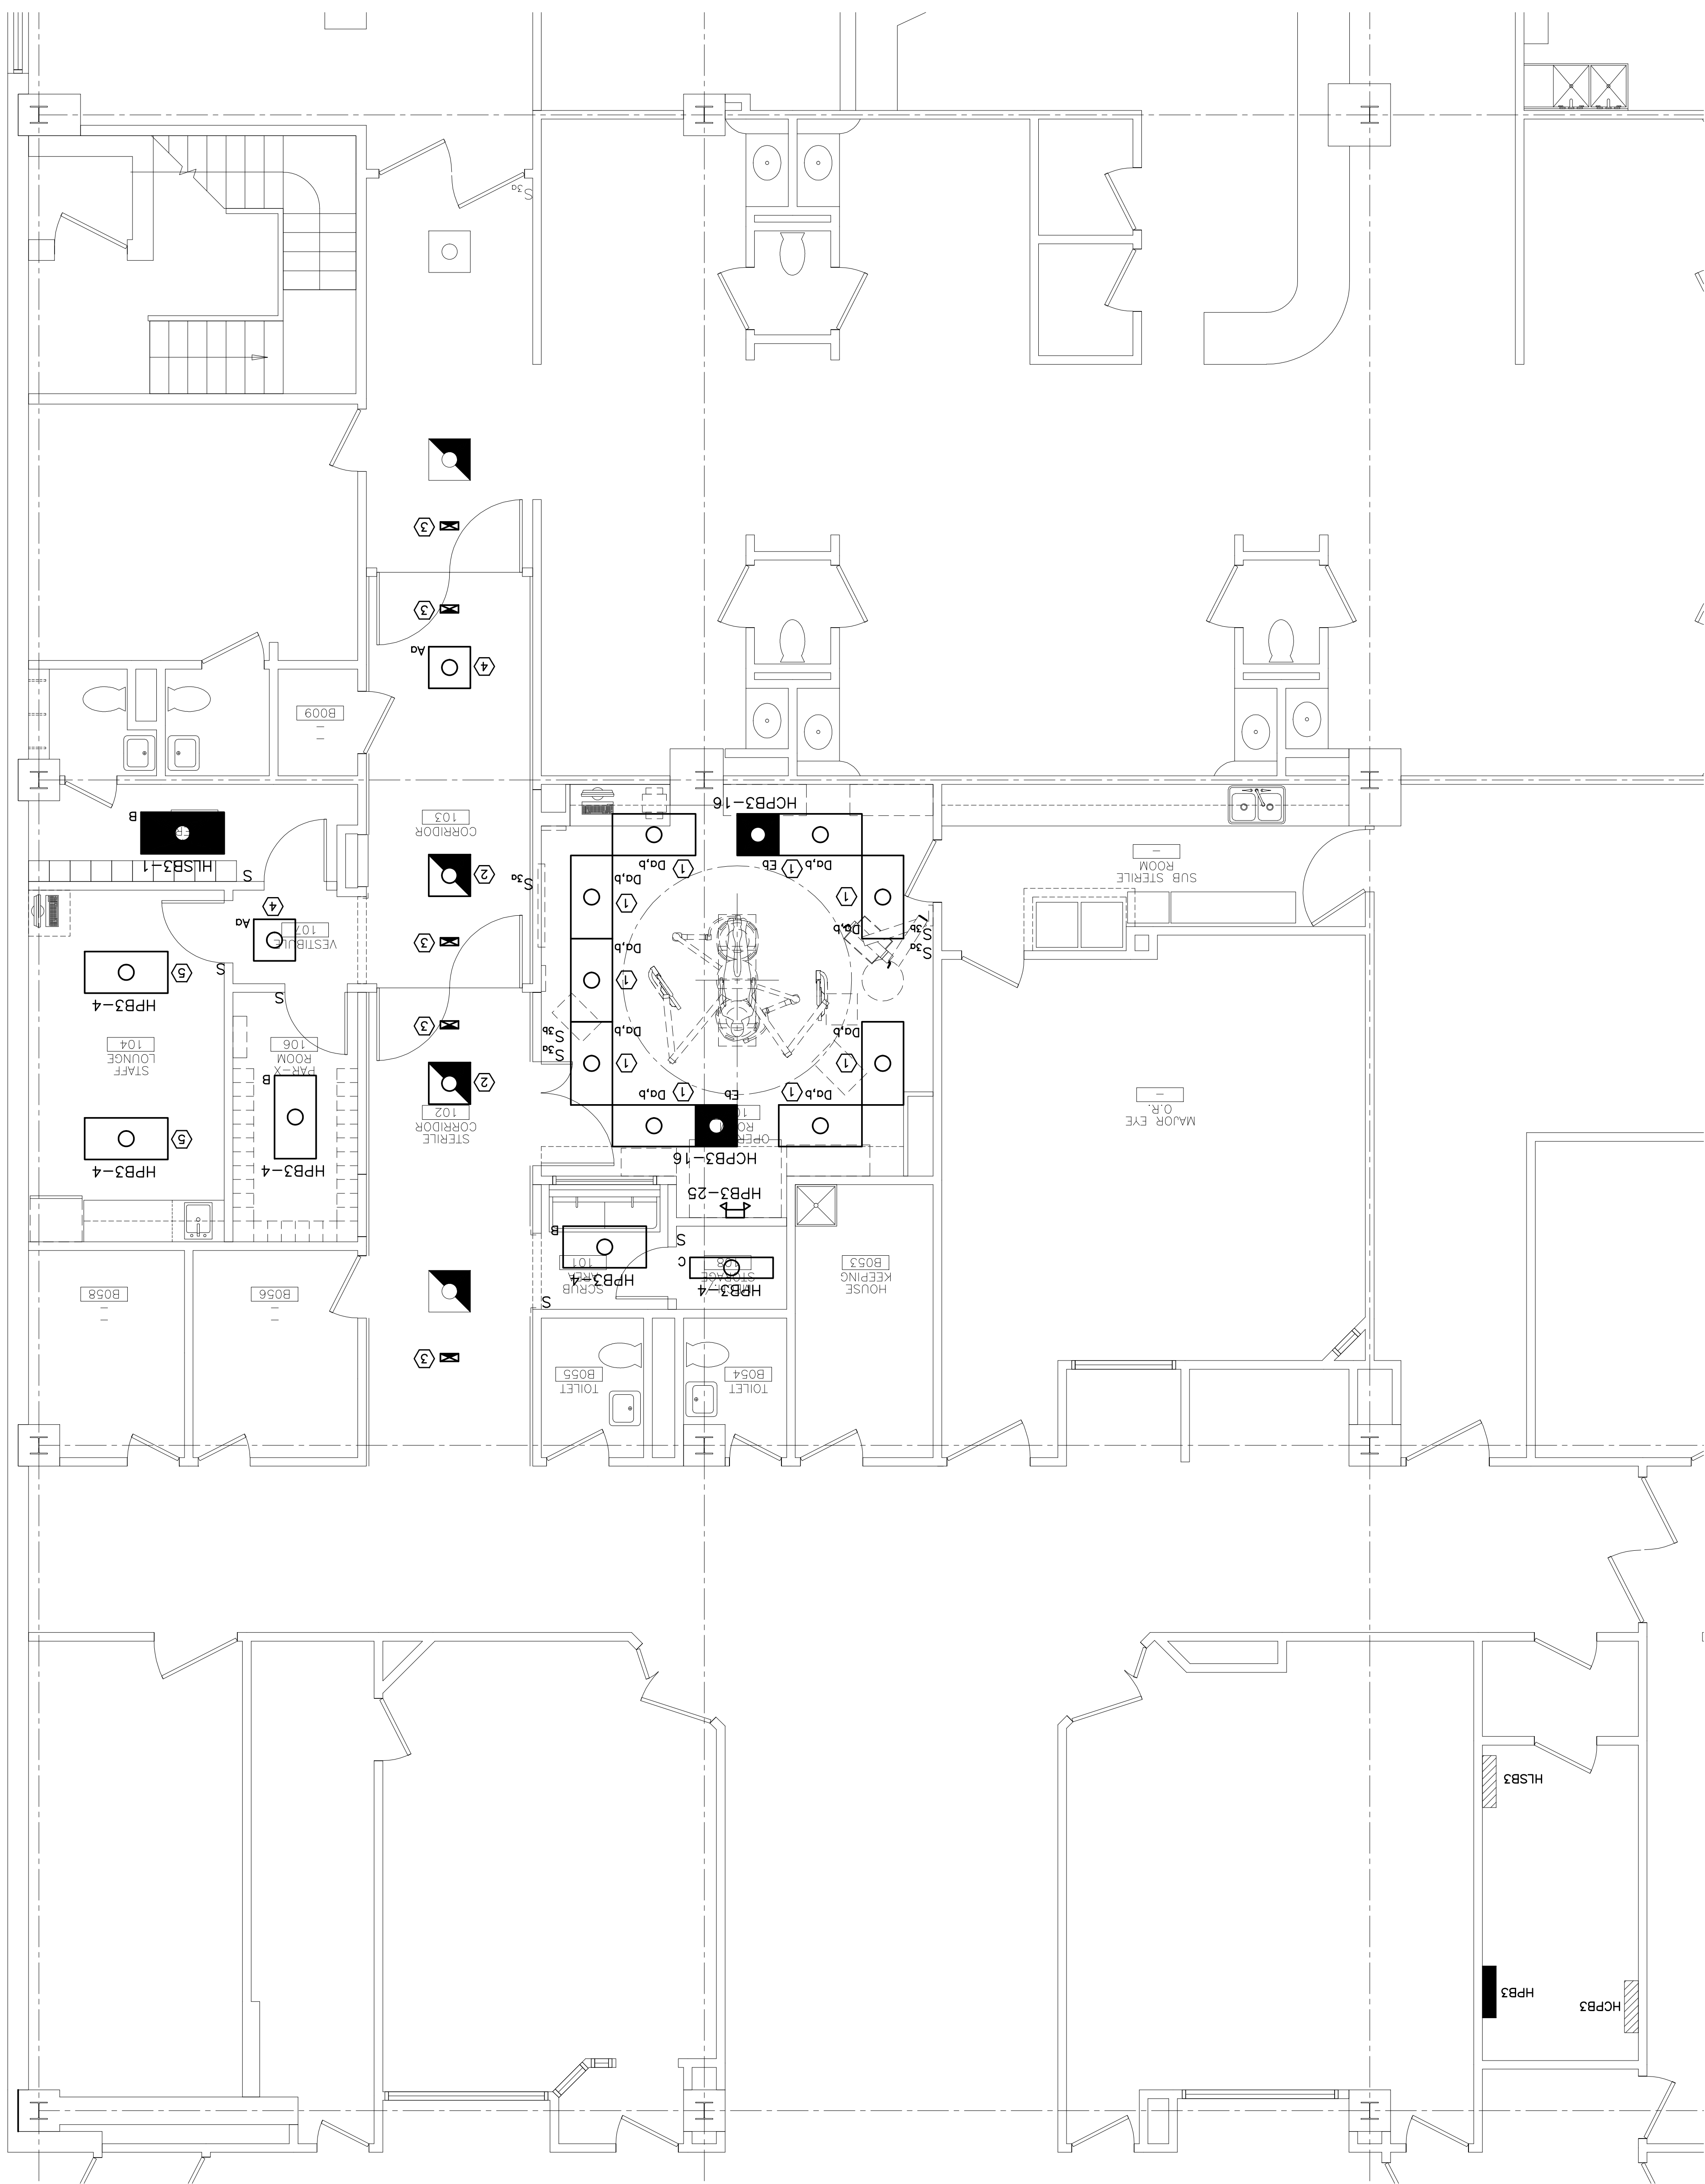

FLOOR PLAN

A6

1/4" = 1'-0"

PROJECT: MAINE MEDICAL CENTER O.R. RENOVATION
 ARCHITECTURE ENGINEERING PLANNING
 144 Fore Street, P.O. Box 618
 Portland, Maine 04104
 Tel: (207) 772-3846
 Fax: (207) 772-1070

PROJECT NORTH

ISSUED FOR CONSTRUCTION 7-27-04

REV.	DESCRIPTION	DATE
0	ISSUED FOR CONSTRUCTION	7-27-04

PROJECT NO. 03122
 SMART CAD FILE: EL101-03122
 SHEET NO. EL101

NOTES:

- SEE SHEET E-001 FOR LEGEND AND GENERAL NOTES.
- AN ATTEMPT HAS BEEN MADE TO UTILIZE SPARE CAPACITY ON EXISTING CIRCUITS AS WELL AS SPARE CIRCUITS IN EXISTING PANELS. CONTRACTOR SHALL VERIFY CAPACITY OF CIRCUITS PRIOR TO CONNECTION AND NOTIFY ENGINEER OF ANY CHANGES.

KEYED NOTES:

- INNER TWO LAMPS SHALL BE WIRED TO CIRCUIT HCPB3-16 AND CONTROLLED BY SWITCH "A". OUTER TO LAMPS SHALL BE WIRED TO CIRCUIT HPB3-25 AND CONTROLLED BY SWITCH "B".
- EXISTING FIXTURE RELOCATED TO POSITION SHOWN. CONNECT TO EXISTING CORRIDOR LIFE SAFETY CIRCUIT.
- CONNECT TO EXISTING CORRIDOR LIFE SAFETY CIRCUIT.
- CONNECT NEW FIXTURE TO EXISTING CORRIDOR NORMAL CIRCUIT.
- EXISTING FIXTURE RELOCATED TO NEW POSITION. CONNECT TO CIRCUIT SHOWN.