WOOD POST

<u></u>
■ JOIST BEARING

STEEL COLUMN

NUMBER OF WOOD STUDS IN POST BELOW

→ CONTINUOUS JOIST WITH INTERMEDIATE BEARING

NUMBER OF TRIM STUDS UNDER HEADER

NUMBER OF KING STUDS ADJACENT TO HEADER


FLUSH FRAMED JOIST BEARING WITH HANGER

WOOD STUD BEARING WALL BELOW

OVER FRAMING BY OTHERS -TYP

COLUMN CONTINUOUS THROUGH THIS LEVEL

COLUMN ABOVE THIS LEVEL

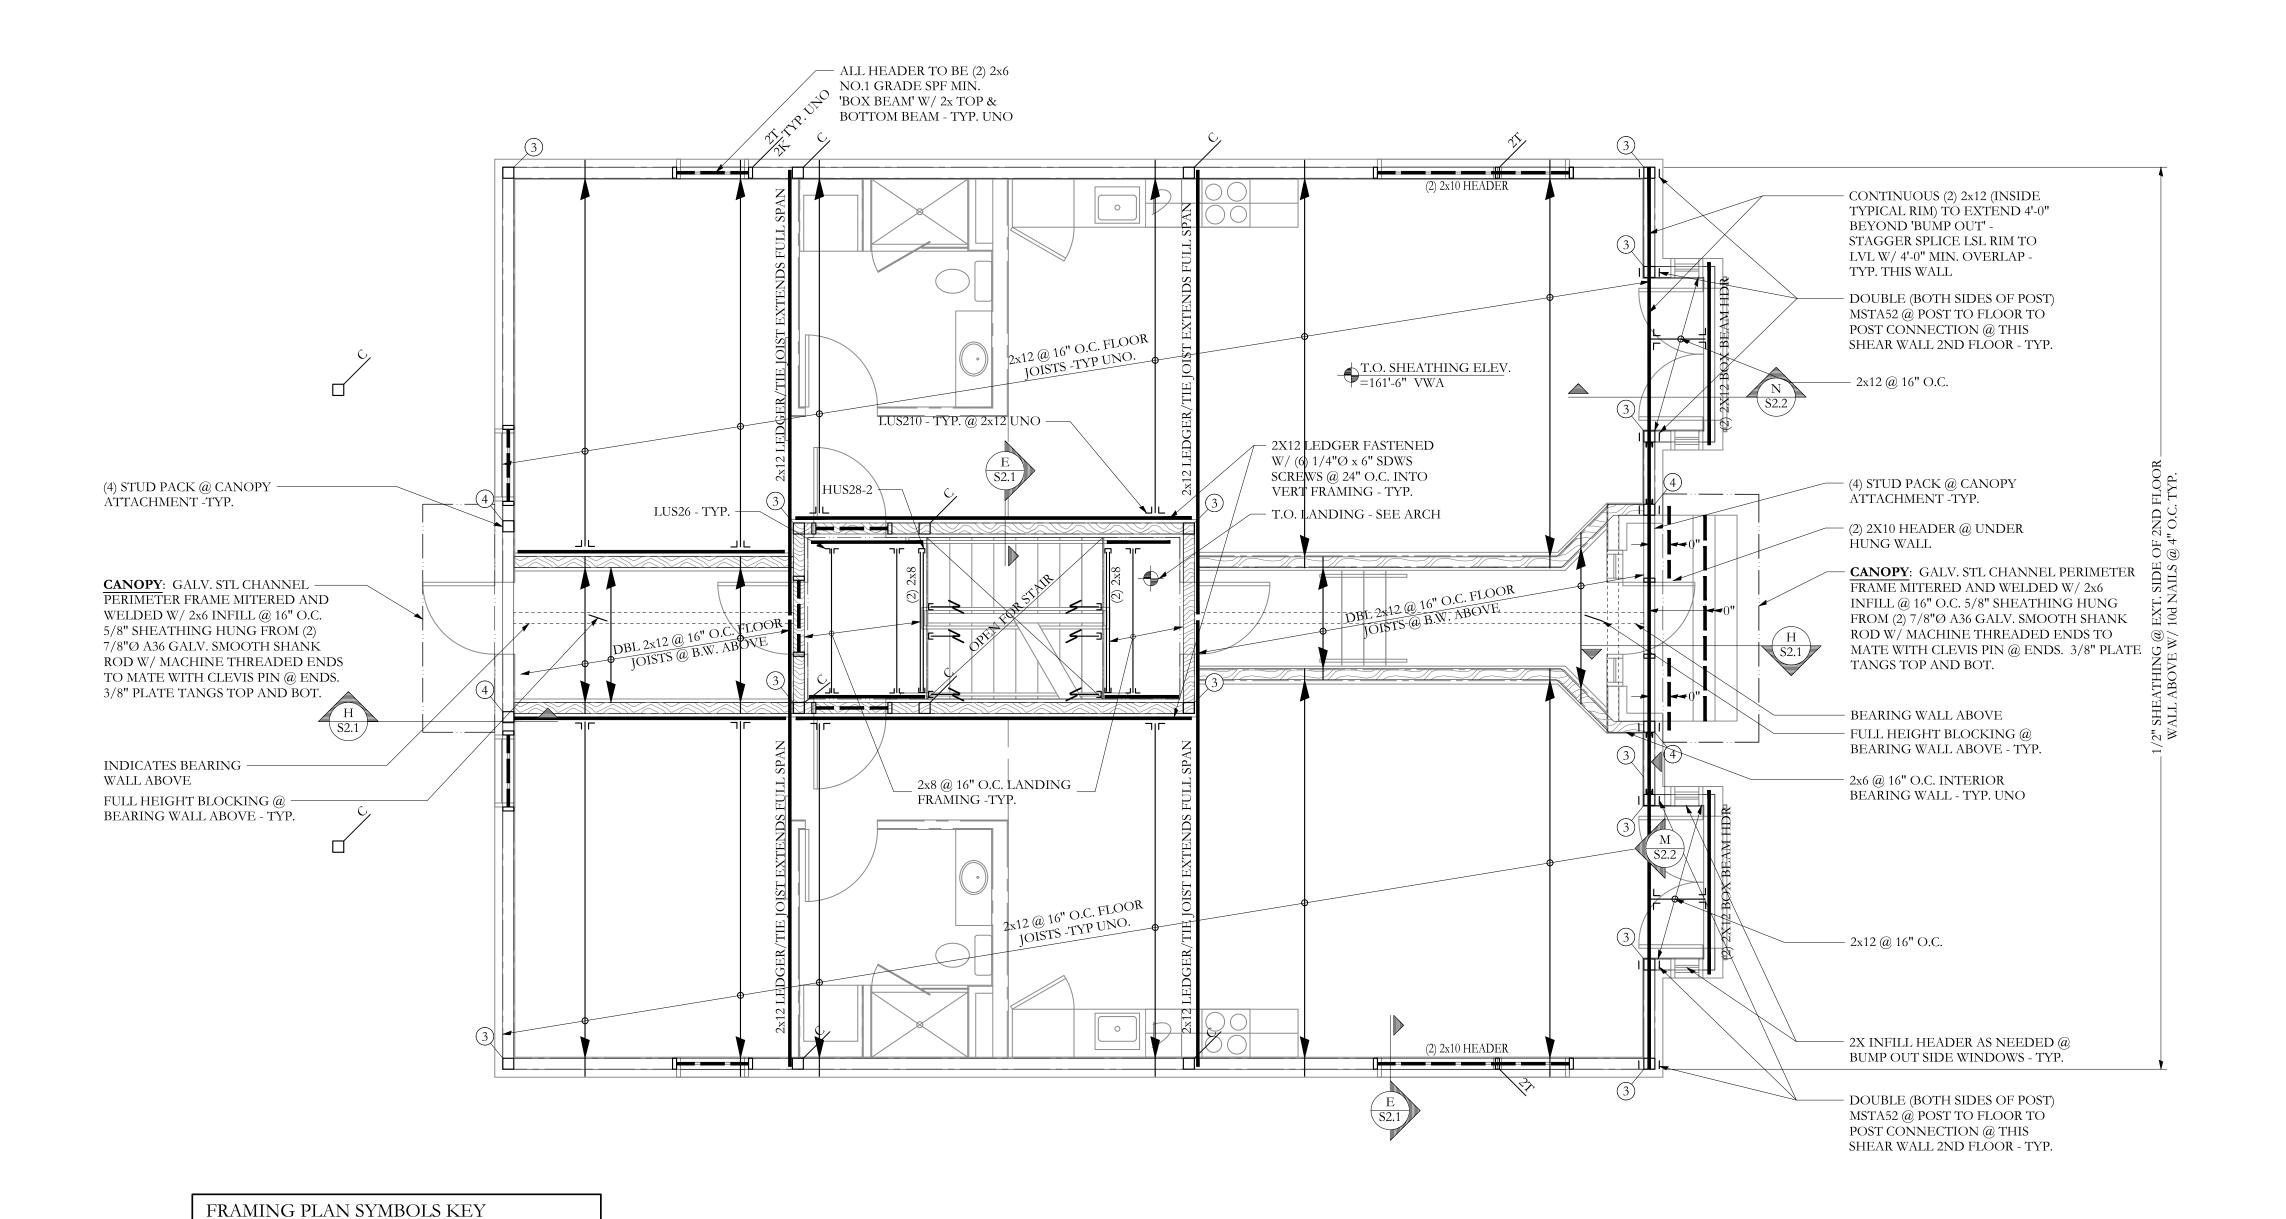

2ND FLOOR FRAMING PLAN

4. ALL HEADERS IN 2x6 BEARING WALLS ARE (2) 2x6 NO.1 GRADE SPF MIN, UNO

5. ALL HEADERS IN 2x4 BEARING WALLS ARE (2) 2x6 NO.1 GRADE SPF MIN, UNO

2. ALL WOOD COLUMNS IN 2x6 WALLS SHALL BE 3-2x6 AND IN 2x4 WALLS SHALL BE 3-2x4 UNLESS NOTED


6. ALL FLOOR SHEATHING TO BE 3/4", SEE GENERAL NOTES FOR ADDITIONAL INFORMATION -TYP

1. SEE SHEET S1.0 FOR GENERAL STRUCTURAL NOTES

OTHERWISE ON PLANS

3. ALL BEAMS ARE DROPPED, UNO

SCALE 1/4"=1'-0"



д <u>40к4г</u>

SECOND

ISSUE DATE
2/23/17
SHEET SCALE
AS NOTE

77 Oak Street Portland, ME, 04101 p. 207-774-4614 f. 866-793-7835

© 2012 Structural Integrity Consulting Engineers, Inc.