

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
1 MANUAL STATIONS	X		X	X	X	X							X	X		X
2 SMOKE DETECTORS	X		X	X	X	X							X	X		X
3 SMOKE DETECTORS - GROUND FLOOR ELEVATOR LOBBY	X		X	X	X	X							X	X		X
4 SMOKE DETECTORS - 1ST FLOOR ELEVATOR LOBBY	X		X	X	X	X	X						X	X		X
5 SMOKE DETECTORS - 2ND FLOOR ELEVATOR LOBBY	X		X	X	X	X	X						X	X		X
6 SMOKE DETECTORS - GROUND FLOOR ELEVATOR ROOM	X		X	X	X	X	X		X				X	X		X
7 SMOKE DETECTORS - GROUND FLOOR ELEVATOR PIT	X		X	X	X	X	X						X	X		X
8 DUCT DETECTORS - GROUND FLOOR STORAGE	X		X	X	X	X						X	X		X	X
9 DUCT DETECTORS - 1ST FLOOR MEZZANINE	X		X	X	X	X					X	X		X		X
10 HEAT DETECTORS	X		X	X	X	X							X	X		X
11 HEAT DETECTORS - GROUND FLOOR ELEVATOR ROOM	X		X	X	X	X	X		X				X	X		X
12 HEAT DETECTORS - GROUND FLOOR ELEVATOR PIT	X		X	X	X	X	X		X				X	X		X
13 CARBON MONOXIDE DETECTORS	X		X	X	X	X							X	X		X
14 SPRINKLER WATER FLOW SWITCHES	X		X	X	X	X						X	X		X	X
15 SPRINKLER TAMPER SWITCHES			X	X	X	X							X	X		X
16 SPRINKLER LOW AIR			X	X	X	X							X	X		X
17 FIRE EXTINGUISHER FAULT			X	X	X	X							X	X		X
18 ANSUL HOOD SUPPRESSION	X		X	X	X	X							X	X		X
19 OPEN CIRCUIT			X	X	X	X							X	X		X
20 SHORT CIRCUIT			X	X	X	X							X	X		X
21 GROUND FAULT			X	X	X	X							X	X		X
22 LOSS OF AC POWER			X	X	X	X							X	X		X

FIRE ALARM I/O MATRIX
SCALE: N.T.S.


GENERAL NOTES

- INSTALLATION PRACTICES SHALL COMPLY WITH NFPA 72, THE NATIONAL ELECTRIC CODE & CENTRAL MAINE POWER FIRE ALARM SPECIFICATION.
- ALL EXPOSED WIRING SHALL BE IN EMT PAINTED RED. CONCEALED WIRING ABOVE SUSPENDED CEILINGS SHALL BE FIRE ALARM MC. ALL FITTINGS AND JUNCTION COVERS SHALL BE PAINTED RED.
- WIRES SHALL BE CHECKED FOR FAULT CONDITIONS (OPEN, SHORT, GROUND FAULT) BEFORE CONNECTING TO FIRE ALARM CONTROL EQUIPMENT. CONNECTIONS TO FIRE ALARM CONTROL EQUIPMENT SHALL BE HANDLED BY EASTERN FIRE.
- WHERE USING SHIELDED CABLE DRAIN SHALL BE CONNECTED AS ONE CONTINUOUS PATHWAY PROTECTED WITHIN DEVICE SPLICES WITH ELECTRICAL TAPE OR AN APPROVED ALTERNATE METHOD AND ONLY CONNECTED THROUGH FINAL TERMINATIONS AT ORIGINATING CONTROL EQUIPMENT SUCH AS FACP OR REMOTE POWER EXTENDER.
- ALL WIRING IS TO BE NEW. KEEP EXISTING FIRE ALARM SYSTEM OPERATIONAL UNTIL NEW SYSTEM IS COMPLETE AND FUNCTIONALLY TESTED.
- EN GAUGE FIRE EXTINGUISHER MONITORING DEVICES MEASURE FOR OBSTRUCTIONS IN FRONT OF EXTINGUISHER. LOCATE HARDWARE AND SENSOR IN AREAS FREE OF OBSTRUCTIONS. CONSULT EASTERN FIRE IF LOCATIONS REFLECTED ON FLOOR PLANS PRESENT FORESEEABLE OBSTRUCTIONS. HEAT DETECTORS IN AREAS EXPOSED TO THE ENVIRONMENT SHALL BE PROGRAMMED FOR FIXED TEMP 155° F ONLY. DETECTORS LOCATED IN CONTROLLED TEMPERATURE AREAS SHALL BE PROGRAMMED FOR RATE OF RISE DETECTION.


KEYED NOTES

- LOCATE CARBON MONOXIDE DETECTOR AT 6' ABOVE FF. AREA SMOKE OR HEAT DETECTION IS LOCATED AT THE CEILING LEVEL. DISABLE SMOKE SENSOR AND PROGRAM CARBON MONOXIDE SENSOR AS SUPERVISORY SIGNAL TO MAIN FACP.
- ISOLATOR MODULES TO BE INSTALLED IN SINGLE FIRE ALARM TERMINAL CABINET WITH SUFFICIENT SPACE TO ACCOUNT FOR MODULES AND WIRING.


ITEM NO.	SYMBOL	QTY. TOTAL	SYMBOL LEGEND	
			SYMBOL	DESCRIPTION
1	○	235	STANDARD BASE (SIGA-SB)	
2	●	10	SMOKE-CO COMBINATION DETECTOR (SIGA-PCD)	
3	⊙	39	HEAT DETECTOR (SIGA-HRD)	
4	□	10	LINE ISOLATOR (SIGA-IM)	
5	⊞	3	DUAL MONITOR MODULE (SIGA-CT2)	
6	⊞	4	MONITOR MODULE (SIGA-CT1)	
7	⊞	16	PULL STATION (SIGA-278)	
8	⊞	4	INPUT/OUTPUT MODULE (SIGA-CRH)	
9	⊞	186	SMOKE-HEAT COMBINATION DETECTOR (SIGA-PHD)	
10	⊞	7	DUCT DETECTOR (SIGA-SD)	
11	⊞	6	TEST SWITCH (SD-TRK)	
12	⊞	41	HORN/STROBE (G1RF-HDVM)	
13	⊞	24	HORN/STROBE (GCFR-HDVM)	
14	⊞	28	STROBE (G1RF-VM)	
15	⊞	6	STROBE (GCFR-VM)	
16	⊞	1	ANNUNCIATOR (RLCD-CR)	
17	⊞	1	FIRE ALARM CONTROL PANEL (O1000R)	
18	⊞	3	PAD PANEL (EPBS10A)	

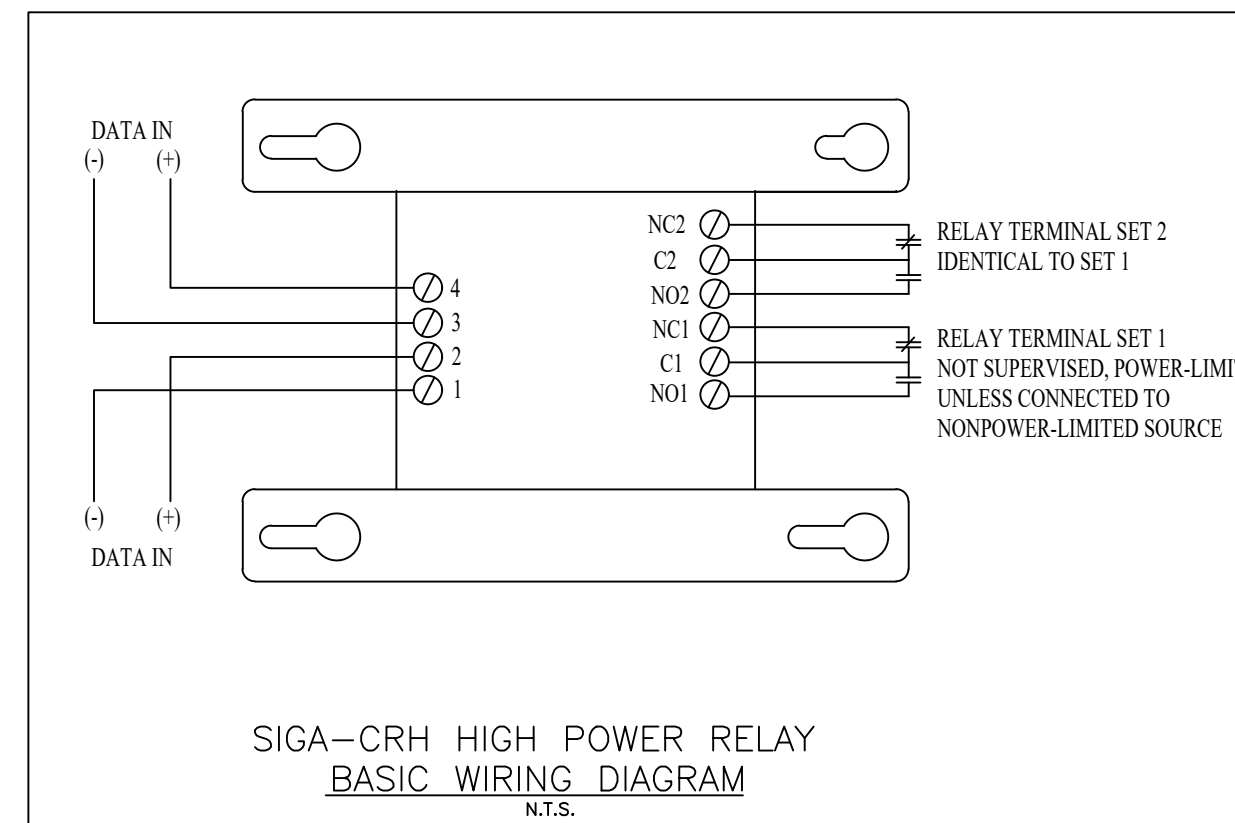


SIGA-CRH HIGH POWER RELAY
BASIC WIRING DIAGRAM
N.T.S.

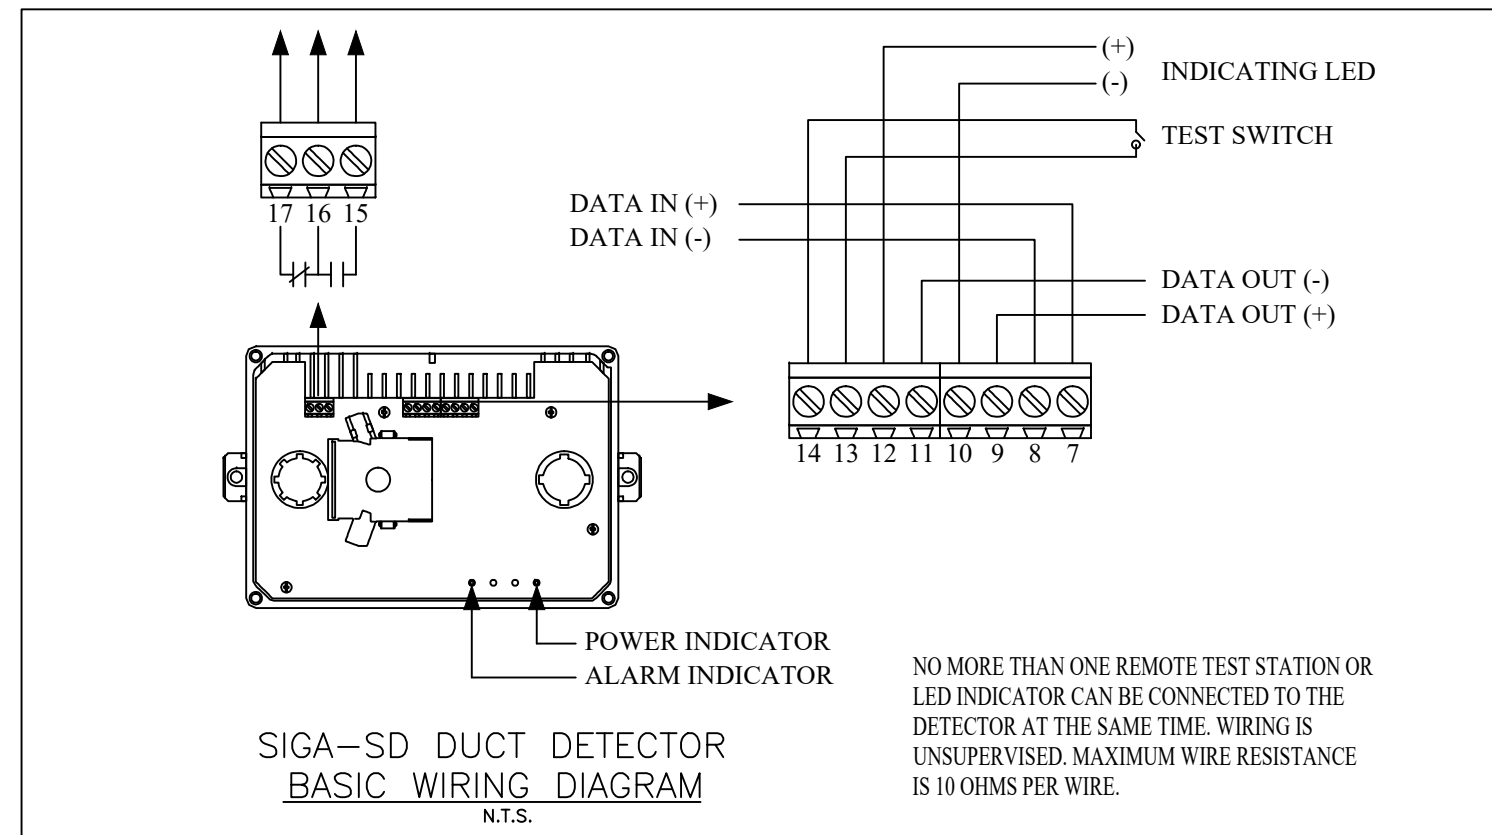


SIGA-SD DUCT DETECTOR
BASIC WIRING DIAGRAM
N.T.S.

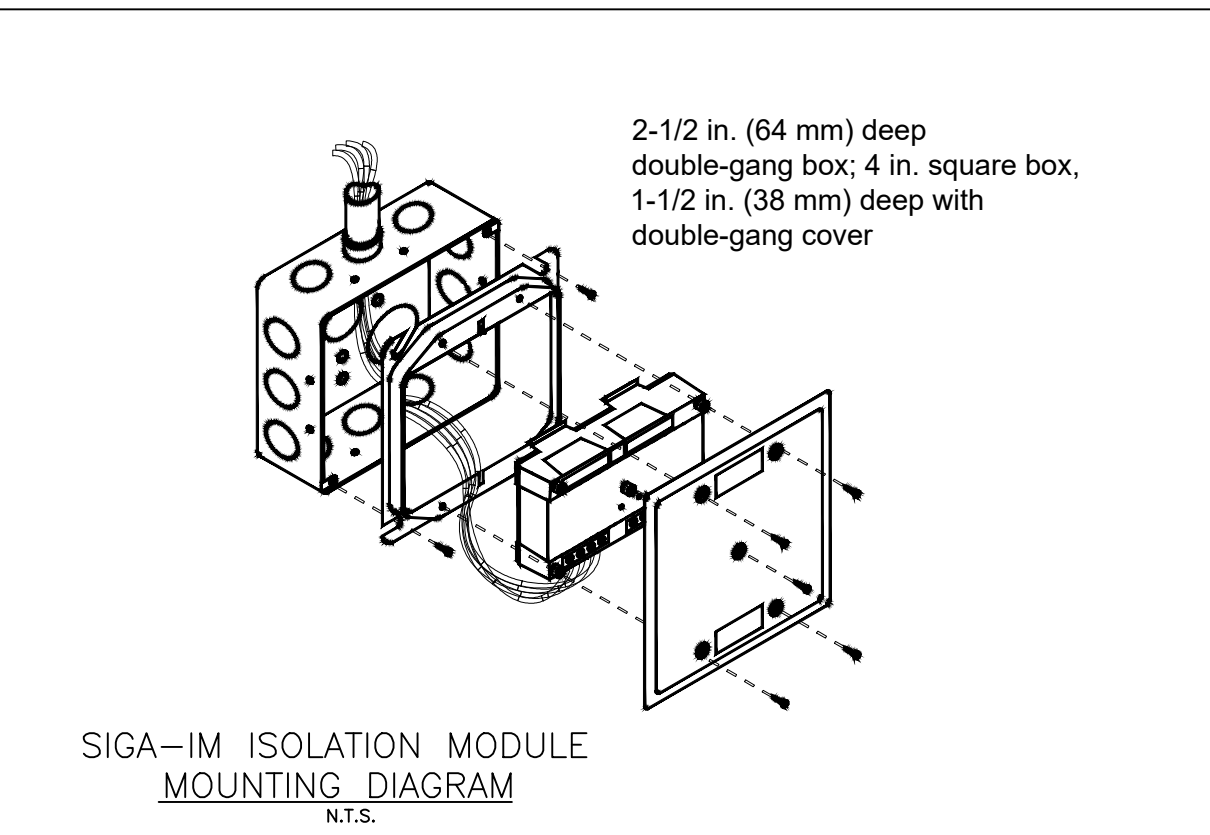


SIGA-IM ISOLATION MODULE
MOUNTING DIAGRAM
N.T.S.

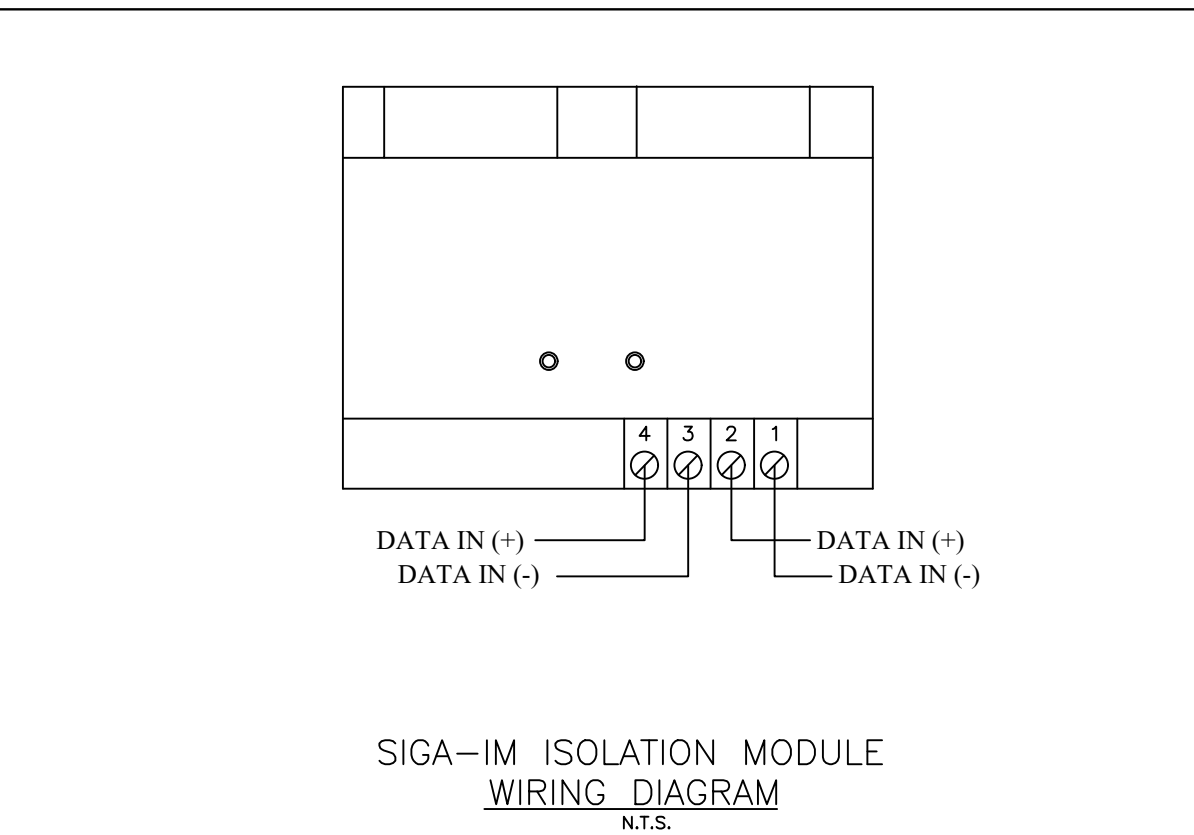


SIGA-IM ISOLATION MODULE
WIRING DIAGRAM
N.T.S.

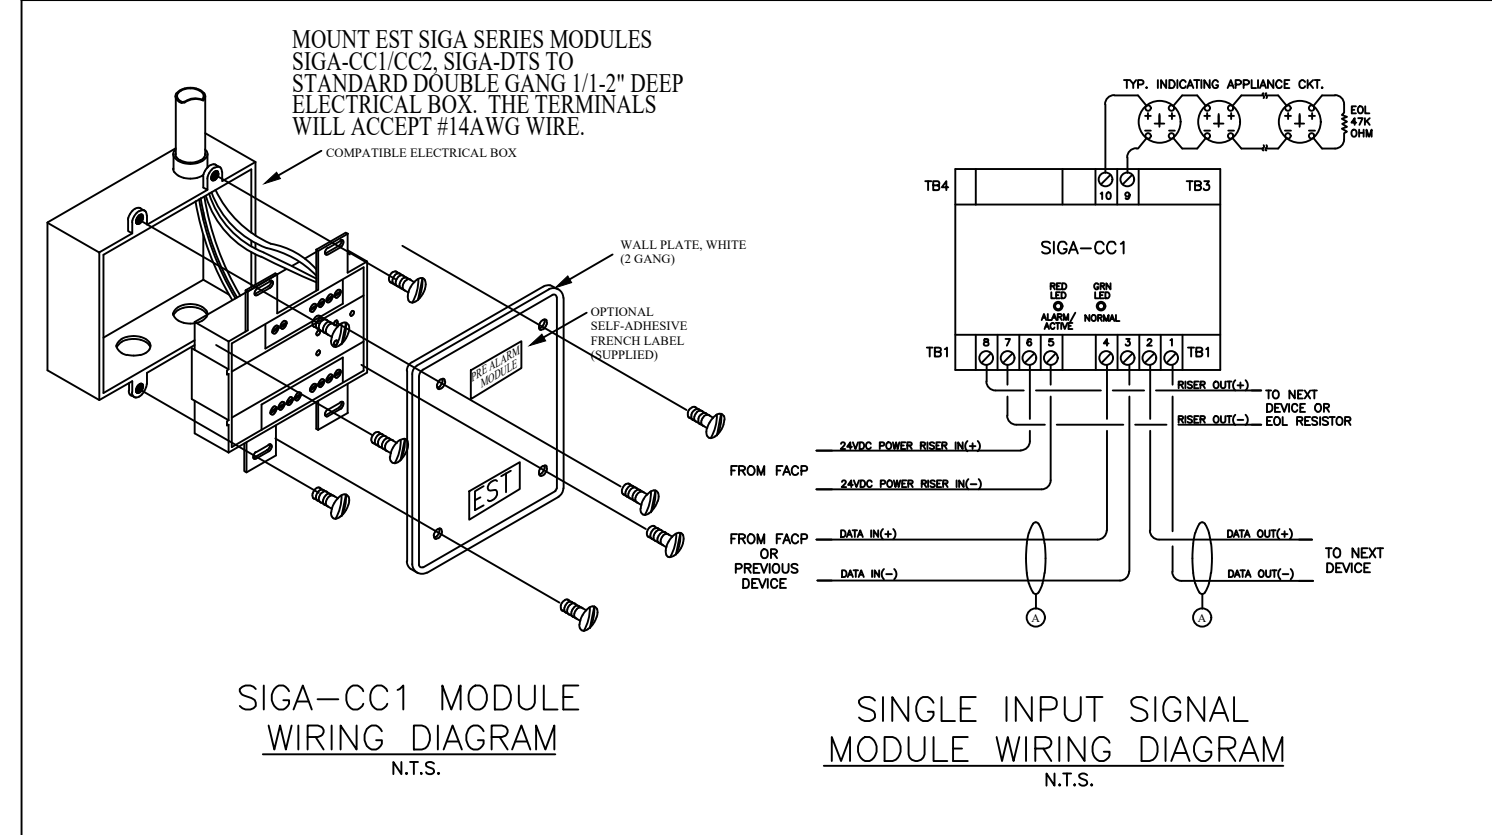


SIGA-CC1 MODULE
WIRING DIAGRAM
N.T.S.

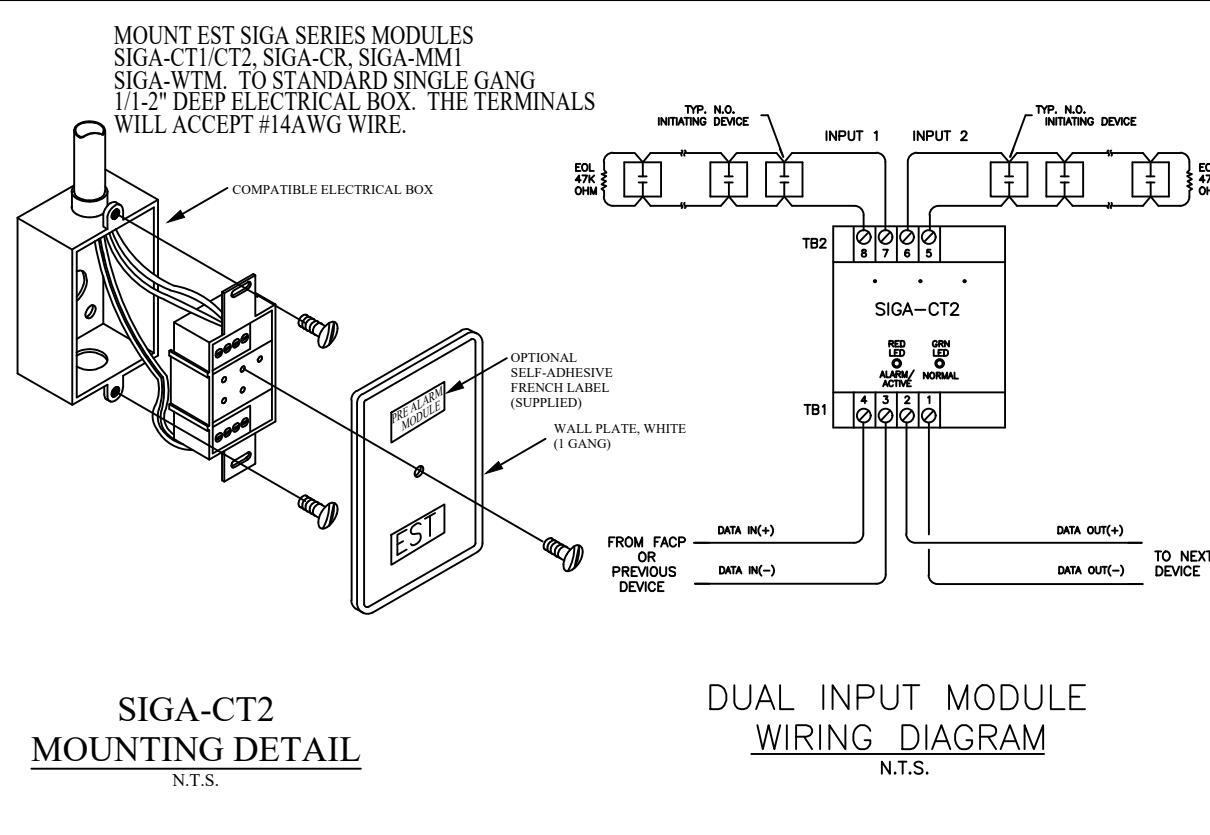


SIGA-CT2
DUAL INPUT MODULE
WIRING DIAGRAM
N.T.S.

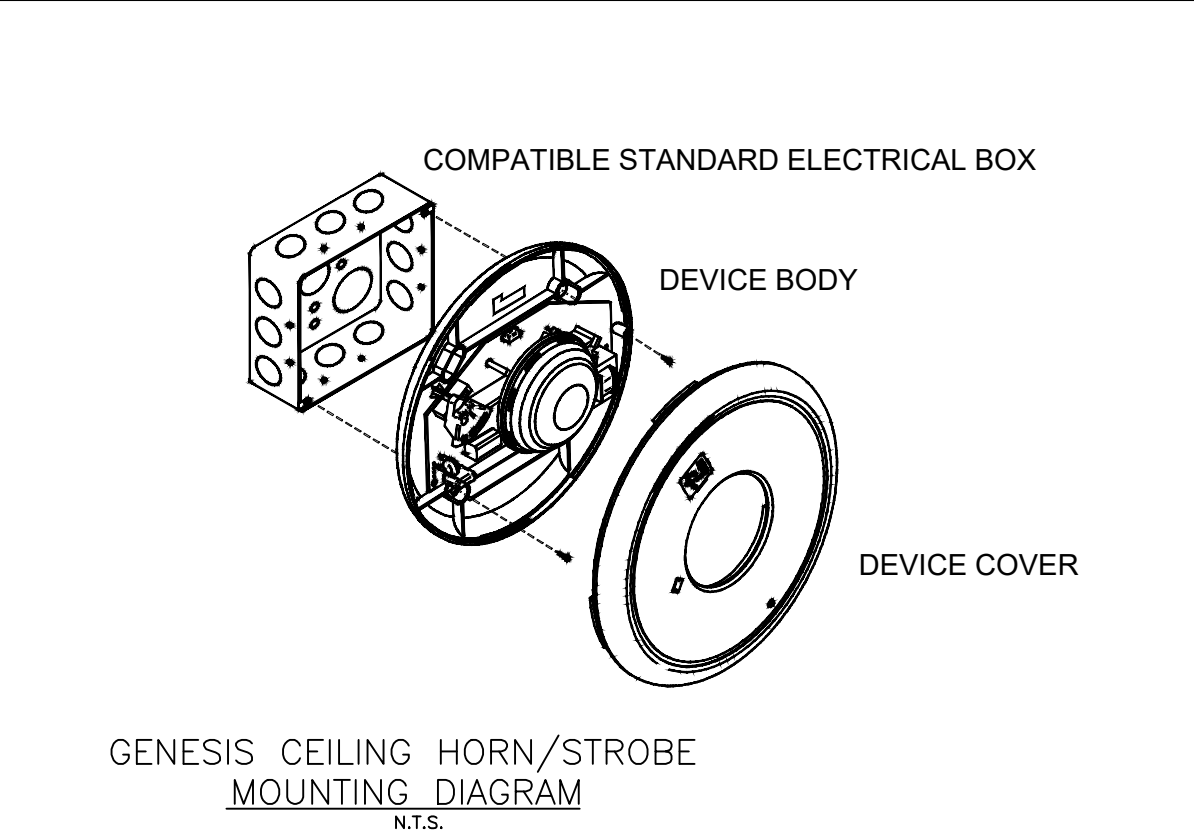


GENESIS CEILING HORN/STROBE
MOUNTING DIAGRAM
N.T.S.

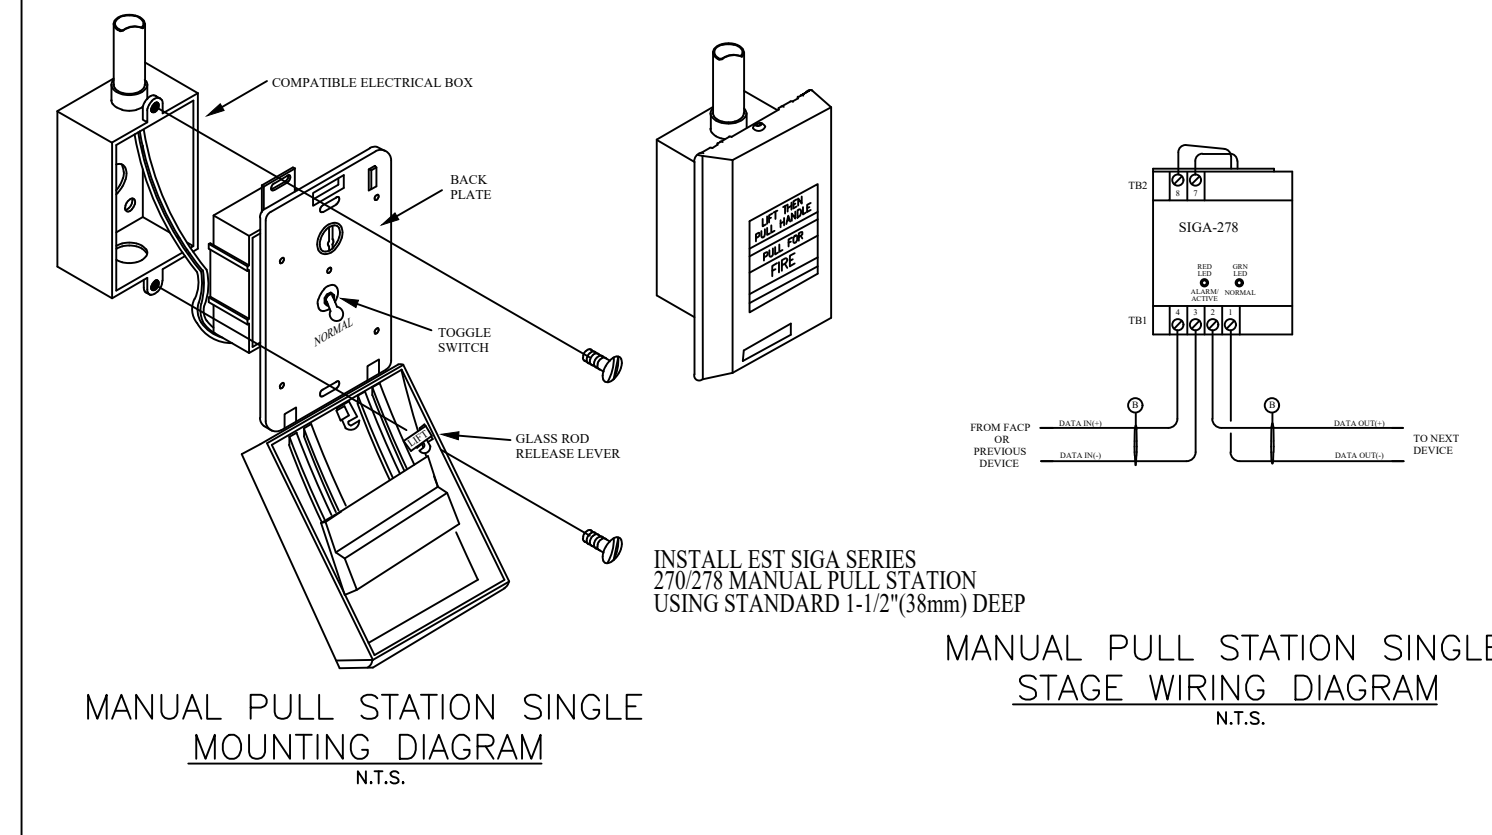


MANUAL PULL STATION SINGLE
MOUNTING DIAGRAM
N.T.S.

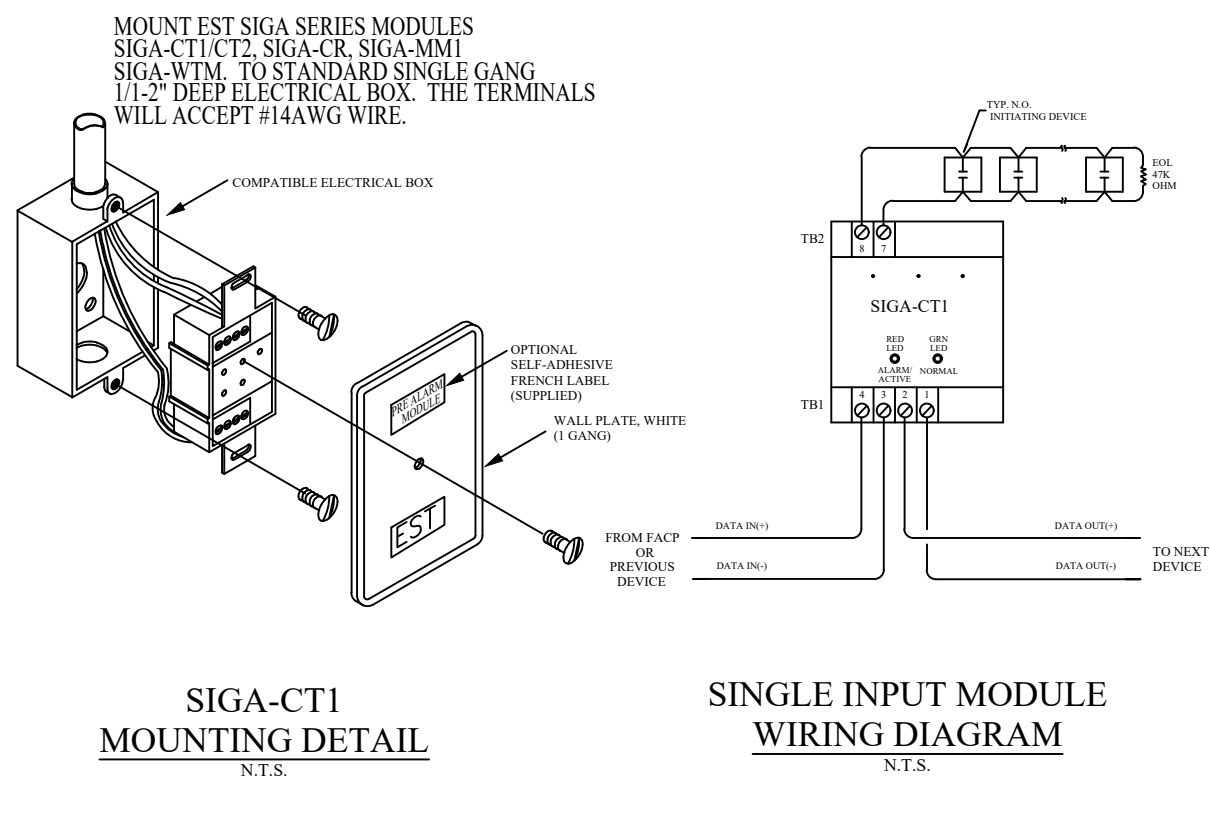


SIGA-CT1
SINGLE INPUT MODULE
WIRING DIAGRAM
N.T.S.

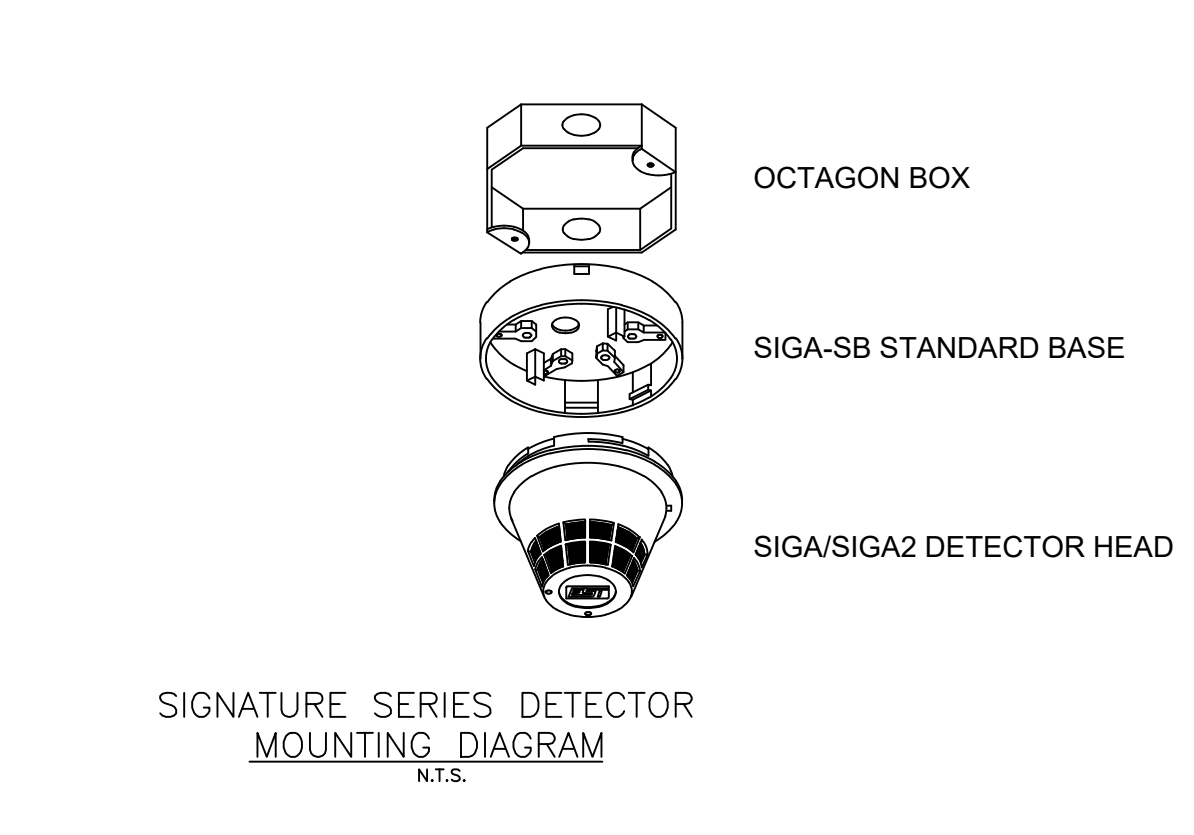


SIGNATURE SERIES DETECTOR
MOUNTING DIAGRAM
N.T.S.

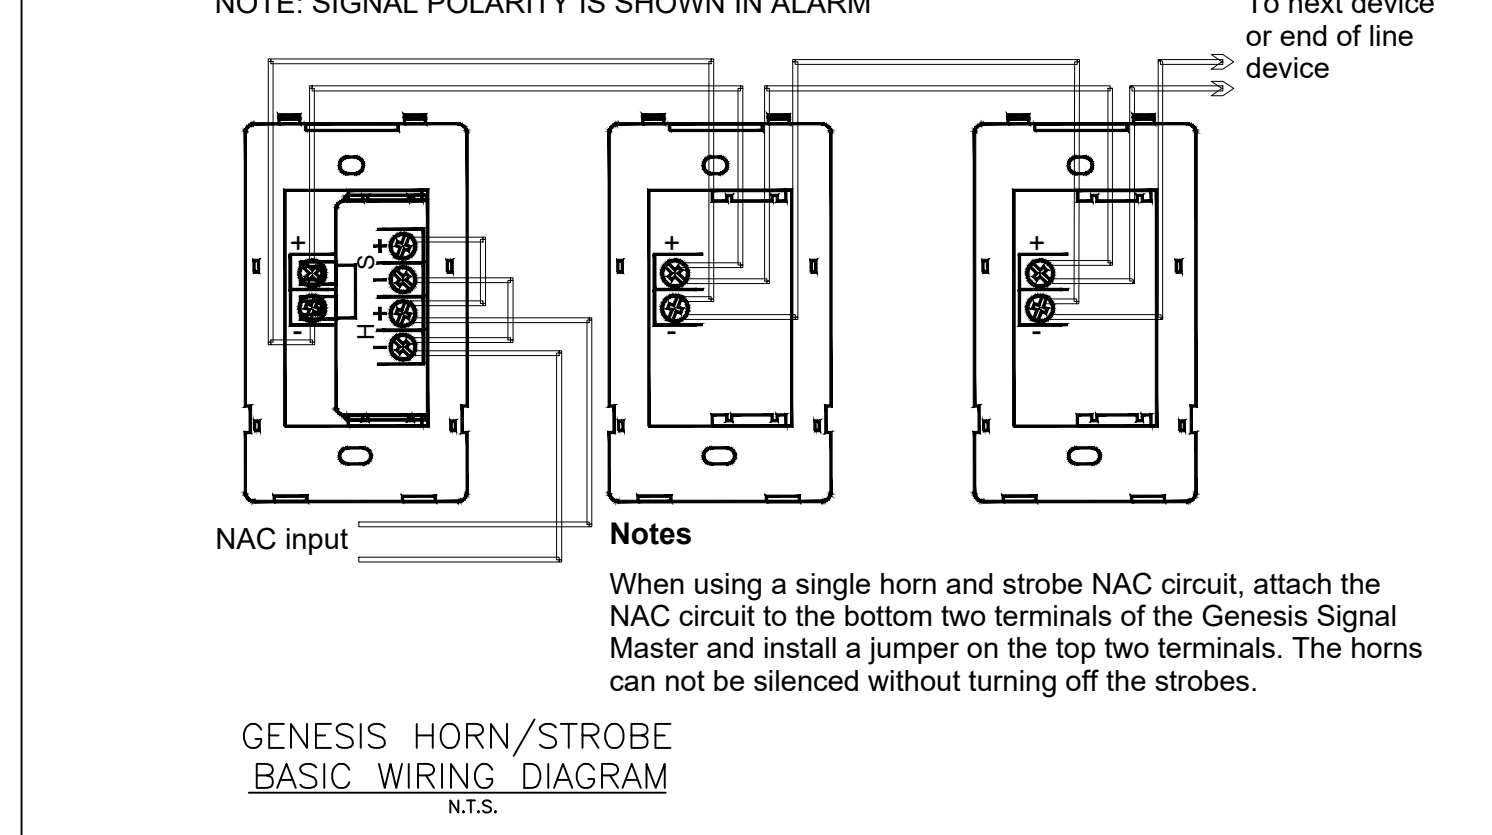

GENESIS HORN/STROBE
BASIC WIRING DIAGRAM
N.T.S.

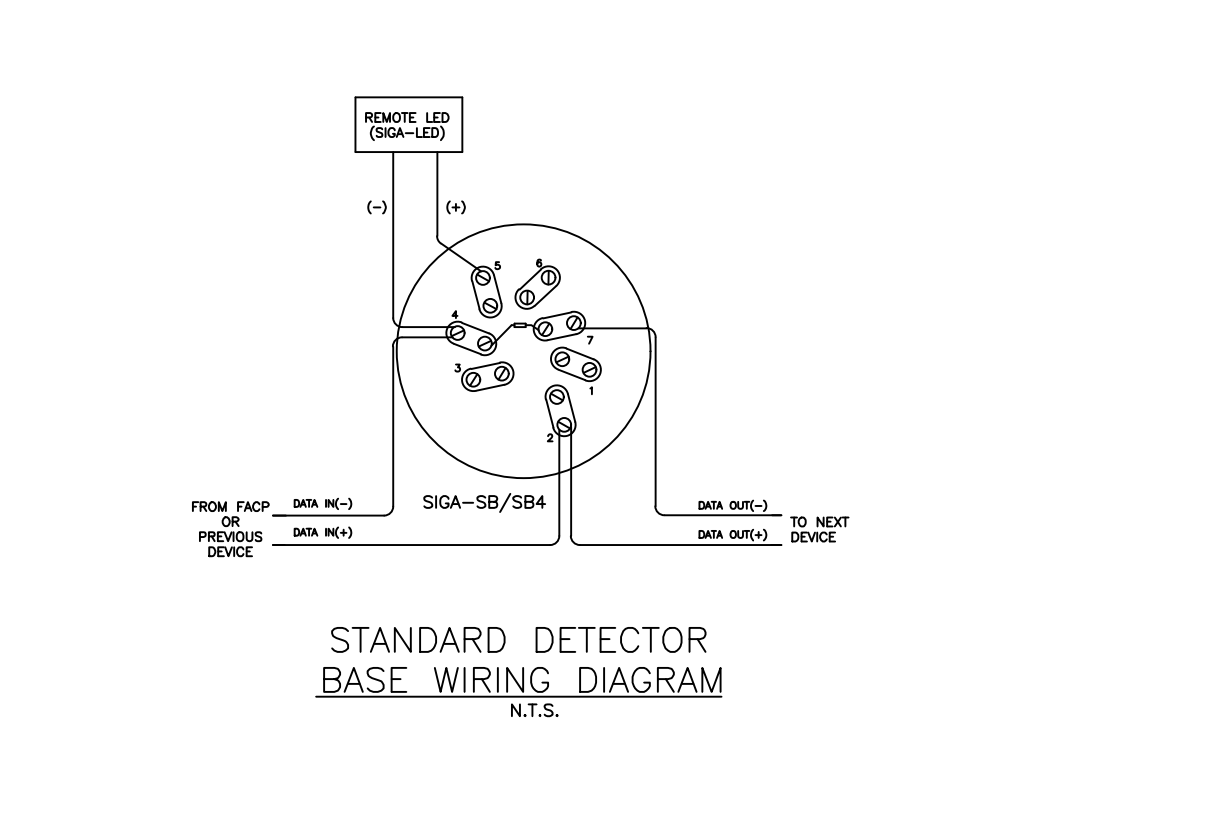

STANDARD DETECTOR
BASE WIRING DIAGRAM
N.T.S.

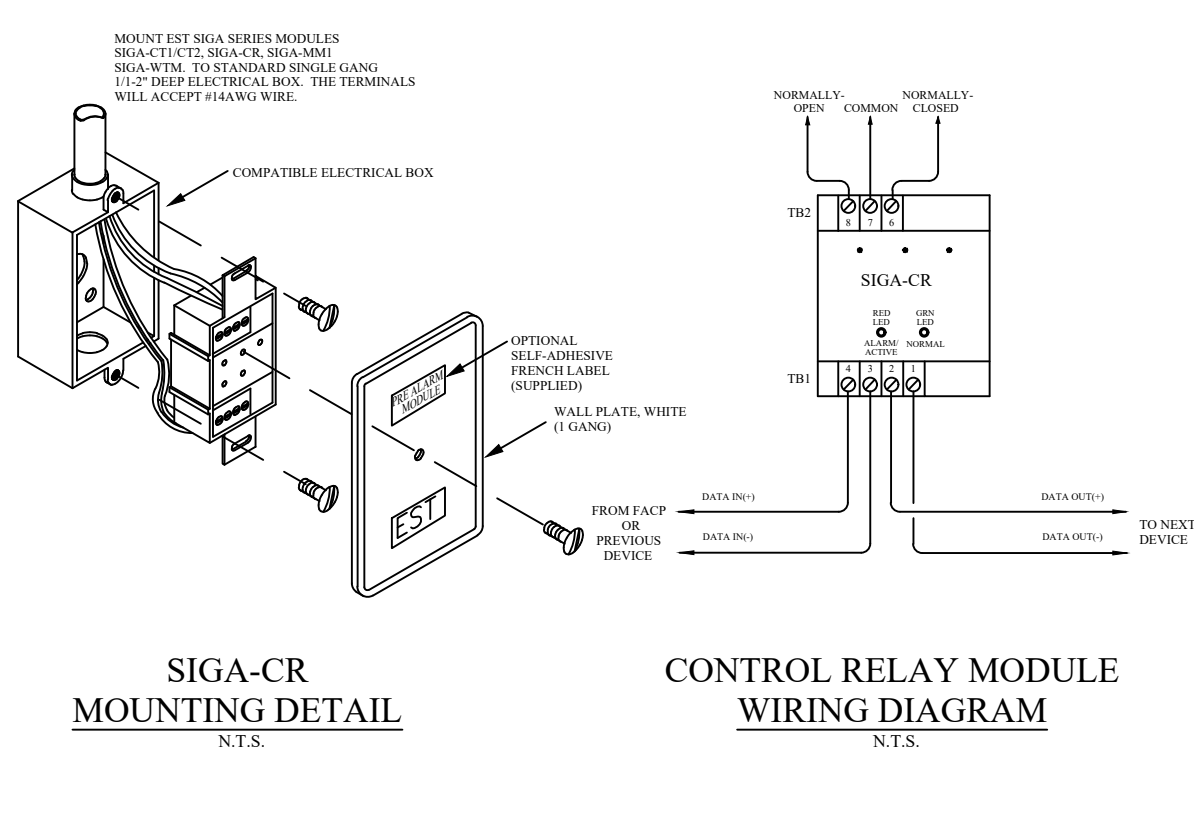

SIGA-CR
MOUNTING DETAIL
WIRING DIAGRAM
N.T.S.

FACP BATTERY CALCULATIONS

STANDBY	0.372643A x 24 HOURS =	8.943432 AH
ALARM	7.021095 A x .083 HOURS =	+ 5859913 AH
		9.5285233 AH
DERATING FACTOR	x 125%	
		11.910654 AH
BATTERIES FURNISHED		18 AH

POWER EXTENDER 1 BATTERY CALCULATIONS


STANDBY	0.07 A x 24 HOURS =	1.68 AH
ALARM	5.682 A x .25 HOURS =	+ 1.4205 AH
		3.1005 AH
DERATING FACTOR	x 125%	
		3.876 AH
BATTERY REQUIRED		7 AH

POWER EXTENDER 2 BATTERY CALCULATIONS

STANDBY	0.07 A x 24 HOURS =	1.68 AH
ALARM	5.78 A x .25 HOURS =	+ 1.445 AH
		3.125 AH
DERATING FACTOR	x 125%	
		3.906 AH
BATTERY REQUIRED		7 AH

POWER EXTENDER 3 BATTERY CALCULATIONS

STANDBY	0.07 A x 24 HOURS =	1.68 AH
ALARM	5.118 A x .25 HOURS =	+ 1.2795 AH
		2.9595 AH
DERATING FACTOR	x 125%	
		3.699 AH
BATTERY REQUIRED		7 AH

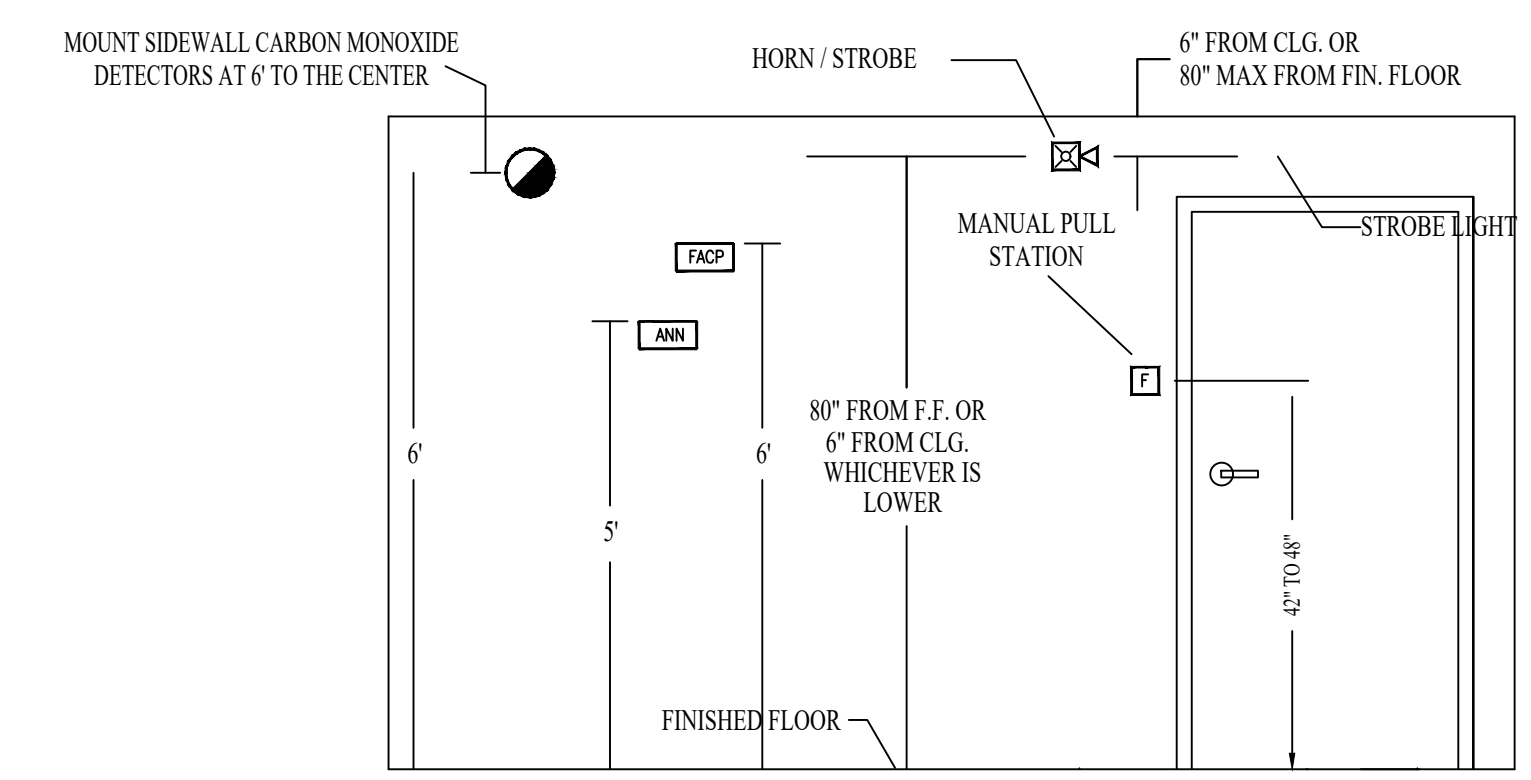

DEVICE ELEVATION DETAIL
NOT TO SCALE

DATE	REVISIONS	REQUIRED APPROVALS	CMP - PORTLAND SERVICE CENTER CANCORD PORTLAND, ME CONTRACT WITH: AVANGRID EASTERN FIRE SERVICES, INC. AUBURN/LEWISTON INDUSTRIAL AIRPARK, AUBURN, MAINE 04210	FIRE ALARM SYSTEM	
9/13/16	PRELIMINARY DESIGN DRAWINGS - NOT FOR CONSTRUCTION	OWNER STATE FIRE MARSHAL		FA-6 DWG. NO.	DETAILS & CALCS
9/20/16	REVISED PER OWNER COMMENTS - FACP & HEAT DETECTOR CHANGES	LOCAL FIRE DEPARTMENT			
2/2/17	REVISED TO SHOW CHANGED DEVICES	DRAWN BY CRM CHECKED BY BWB CONTRACTOR LICENSE #		JOB NUMBER 3511 SCALE AS SHOWN DATE 2/2/2017	

