


Important! Wiring connections must have correct polarity.

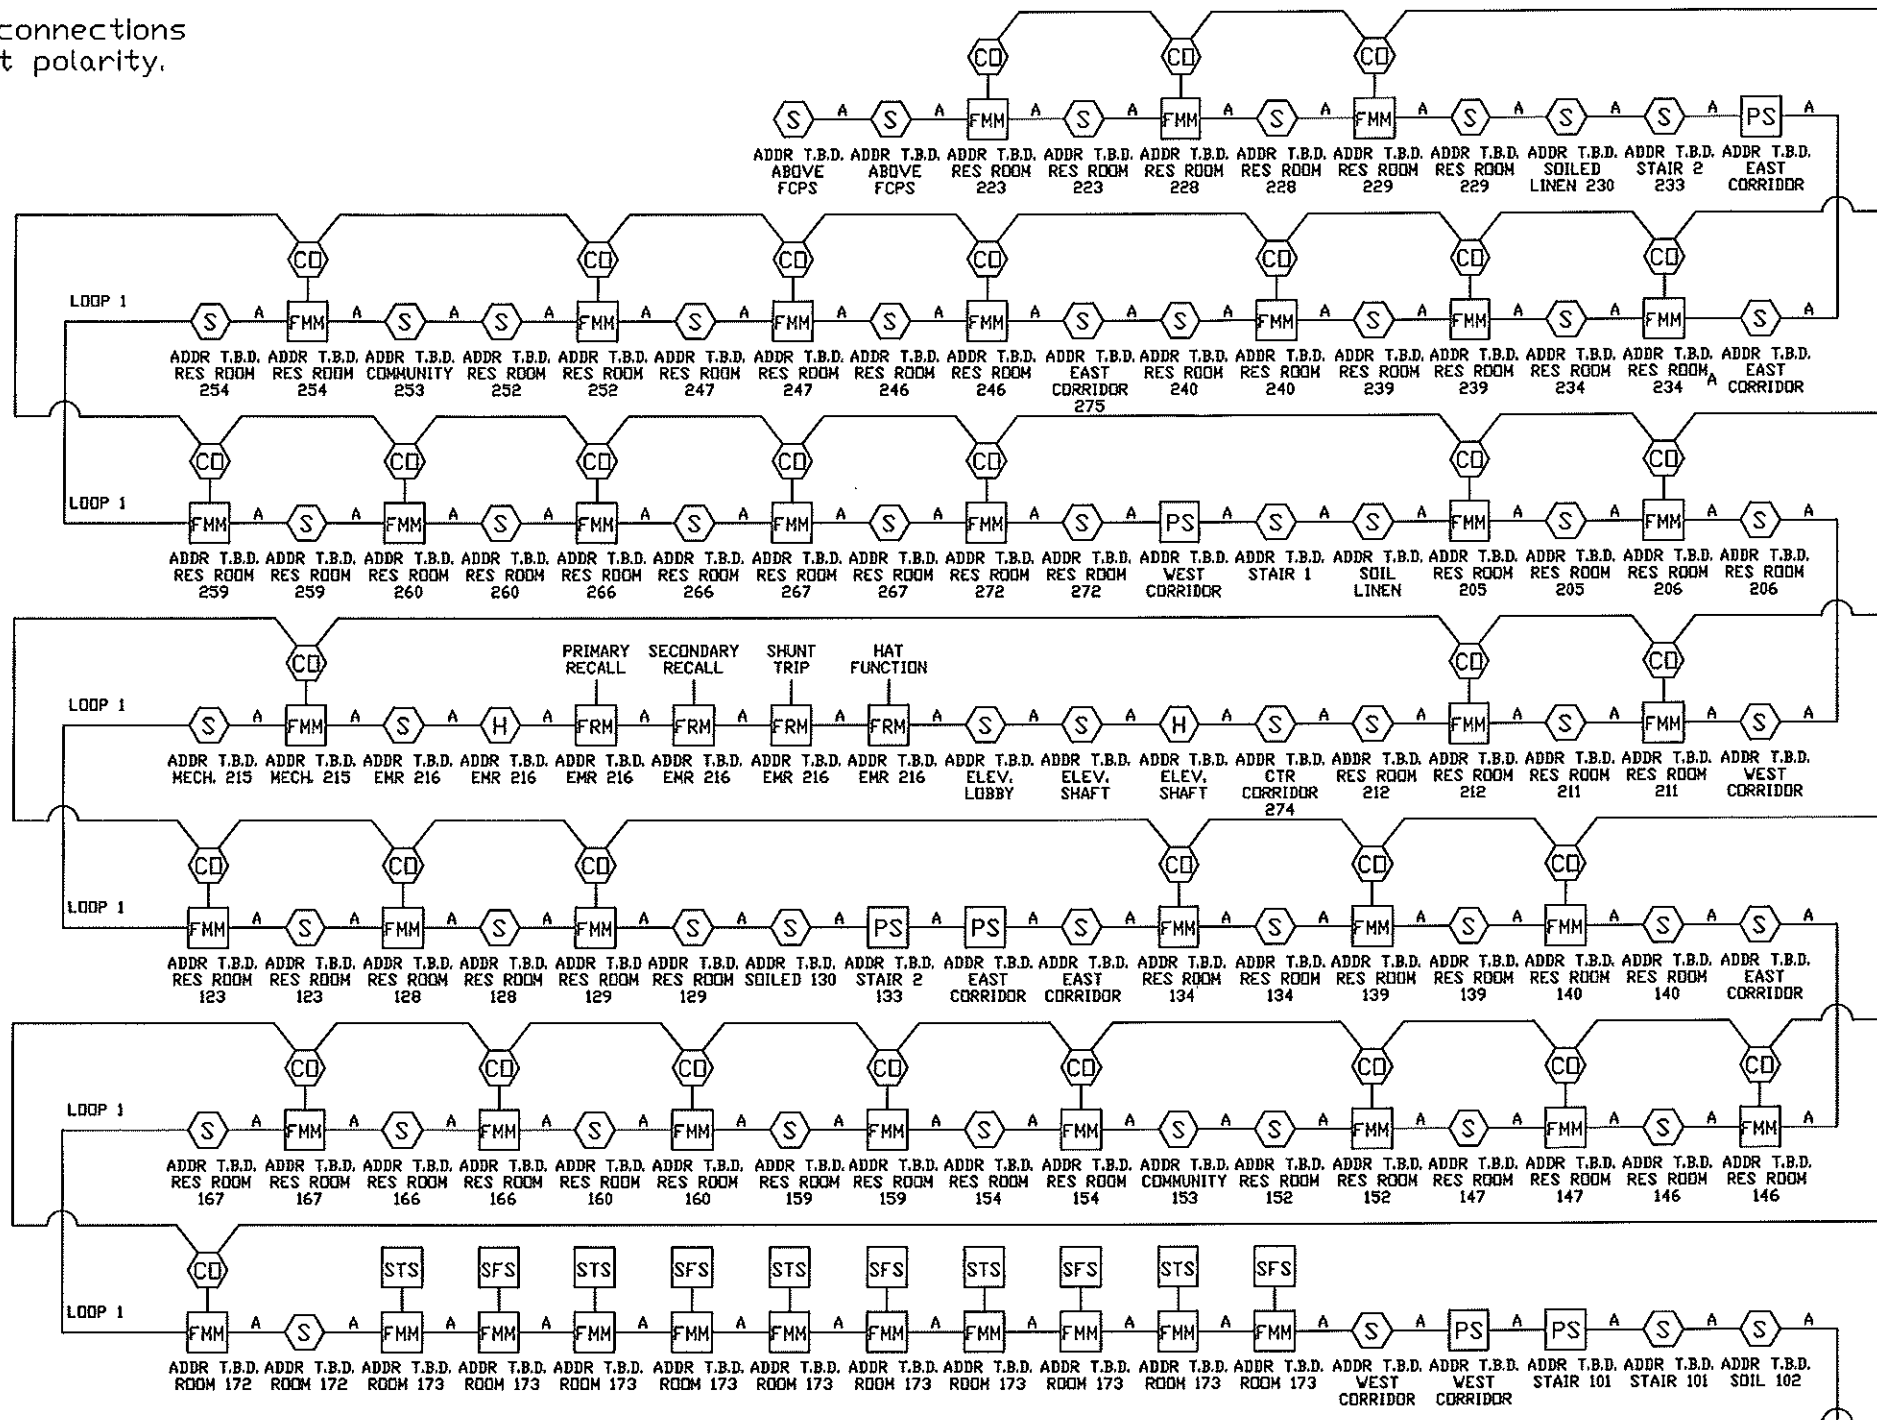

LEGEND

MOUNTING HEIGHT	PS	PULL STATION
48 INCHES	S	SMOKE DETECTOR
	H	HEAT DETECTOR
	RT	REMOTE TEST/INDICATOR
	DS	DUCT SMOKE DETECTOR W/ FSP-85IR HEAD
80 INCHES	VD	VISUAL ONLY
80 INCHES	AV	AUDIO / VISUAL
	FMM	MONITOR MODULE
	FRM	RELAY MODULE
	STS	SPRINKLER TAMPER
	SFS	SPRINKLER FLOW
	DH	DOOR HOLDER
	CD	CARBON MONOXIDE DETECTOR

This drawing is an accurate layout from provided floor plans and information available at time of design. Circuiting has been designed for maximum use of resources available with supplied equipment. Deviations from this design must be noted and approved prior to final acceptance. Note: Signal Circuit 1 has a 2.5 amp load limitation, Circuits 2-3-4 have a combined load limitation of 2.5 amps. REMOTE power supply has a 3.0 amps limitation per circuit and an 8.0 amp combined limitation for all 4 circuits. Changes in circuiting must incorporate equipment specifications/limitations (see chart below for current vs. candela rating. Distances and ratings shown are for wall applications ONLY, call Norris, Inc. for ceiling devices when applicable.) Twisted-Shielded Cable is NOT recommended for use on SLC wiring for this panel. Untwisted cable inside/outside conduit has a 1000' max distance sizes 12-18AWG.

Room Size	Candela Rating	Load (amps)
20' x 20'	15 cd	0.08 amps
28' x 28'	30 cd	0.10 amps
45' x 45'	75 cd	0.15 amps
54' x 54'	110 cd	0.20 amps

- 4.7k END OF LINE RESISTOR (Panel Circuits)
- A 1 PR #12 AWG TWISTED PAIR CABLE (Up to 10,000 ft)
 - A 1 PR #14 AWG TWISTED PAIR CABLE (Up to 8,000 ft)
 - A 1 PR #16 AWG TWISTED PAIR CABLE (Up to 4,500 ft)
 - B 1 PR #12 AWG FPL CABLE
 - D 1 PR #14 AWG FPL CABLE
 - E 1 PR #16 AWG FPL CABLE
 - F 2c #12 AWG CABLE
 - G 2c #14 AWG CABLE
 - H 2c #16 AWG CABLE
 - K 1 CAT5 CABLE
 - L 1 PR #16 AWG TWISTED SHIELDED CABLE

REVISION 2	DATE:
REVISION 1	DATE:
REVISION 0 SUBMITTAL	DATE: 1/6/2013

SYSTEM WIRING RISER

PROJECT NAME
Seaside Rehab (SLC)
PORTLAND, MAINE



SCALE NTS
BY: CIC
CK BY:

SAVED AS:


NORRIS INC
Prepared For Tomorrow's Delivered Today
2257 BROADWAY, So PORTLAND, MAINE

INTERUPT EXISTING SLC LOOP AT CLOSEST CONVENIENT ADDRESSABLE DEVICE.

PLEASE REFER TO RADIO MASTERBOX DIAGRAM FOR CONNECTION

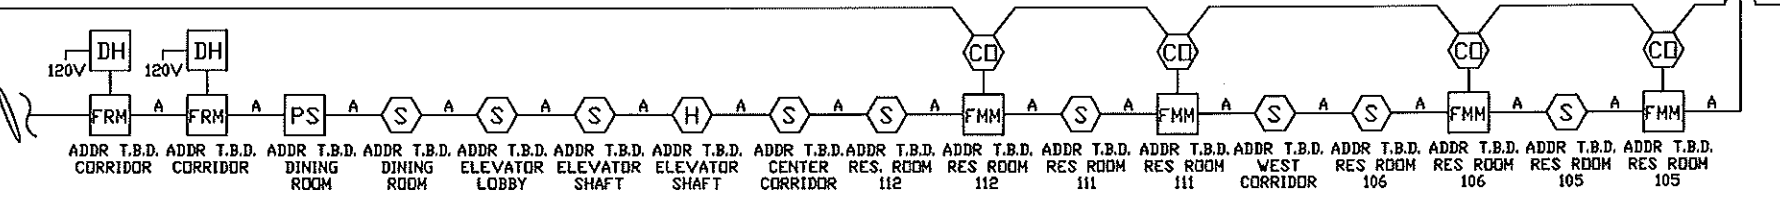

Coordinate terminations with telephone representative. Must be completed before fire alarm service visit for final certification. Call Norris Inc. 1-800-370-3473 for Monitoring contract prior to scheduling final connections.

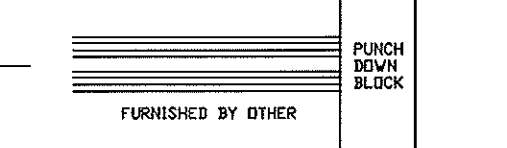

Important! Duplicate Addresses on devices of different style is NOT an error in design or printing. All electronic devices MUST be placed in a heated room with temperature above 32 degrees