

SHEET NOTES

- 01 DRINKING FOUNTAIN
- 02 POWER FOR PTZ CAMERA. COORDINATE EXACT LOCATION WITH SECURITY CONTRACTOR.
- 03 CONTRACTOR SHALL RUN 2-4" CONDUITS FROM THIS AREA TO AN AREA NEXT TO PANEL THA2. EXACT LOCATION OF STUB-UPS SHALL BE COORDINATED WITH TENANT.
- 04 PROVIDE GFCI TYPE RECEPTACLE IN THE ESCALATOR UPPER LEVEL MACHINE SPACE. COORDINATE LOCATION AND INSTALLATION WITH THE ESCALATOR CONTRACTOR.
- 05 CONNECT DISCONNECT SWITCH TO JUNCTION BOX/TERMINAL BOX PROVIDED BY THE ESCALATOR CONTRACTOR IN THE UPPER LEVEL MACHINE SPACE. COORDINATE LOCATION AND INSTALLATION WITH ESCALATOR CONTRACTOR.
- 06 REFER TO ONE-LINE DIAGRAM FOR NOTES ASSOCIATED WITH THIS PANELBOARD.
- 07 CONTRACTOR SHALL RUN 4-4" CONDUITS FROM THIS AREA TO AN AREA NEXT TO PANEL THA2. EXACT LOCATION OF STUB-UPS SHALL BE COORDINATED WITH TENANT.
- 08 PROVIDE 42 KVA/32 KW LIEBERT NPOWER THREE PHASE UNINTERRUPTED POWER SUPPLY MODEL #37SA040C008A03 OR EQUAL. PROVIDE WITH BATTERY POWER RACK RATED FOR 45 MINUTES AT 32 KW LOAD MODEL #37BP04XR1BNL & MAINTENANCE BYPASS CABINET MODEL #37MB040CC61N. SEE SHEET E12.01 FOR WIRING CONNECTIONS.
- 09 NOT USED
- 10 PROVIDE JUNCTION BOX MOUNTED TO CEILING OF LEVEL 2. PROVIDE TWO LENGTHS OF MC CABLE AS INDICATED AND CONNECT TO EAST & WEST SIDES OF JUNCTION BOX. LEAVE COILED FOR FUTURE CONNECTION TO HOLDROOM 2501 FURNITURE. WHERE TWO HOME RUNS ARE SHOWN TO A JUNCTION BOX, RUN BOTH CIRCUITS IN A SINGLE 3/4" WITH #14 AWG & #10 GND. ONE CIRCUIT SHALL FEED MC CABLE TO THE EAST & OTHER TO THE WEST. LOCKOUT OR TAGOUT CIRCUIT BREAKER, OR USE ALTERNATIVE SAFE WIRING PROCEDURES UNTIL WIRING TO FURNITURE IS COMPLETED.
- 11 PROVIDE NEMA L5-15R TWIST LOCK RECEPTACLE.
- 12 JUNCTION BOX MOUNTED IN WALL FOR CONNECTION TO BOTTLE FILLING STATION. COORDINATE EXACT LOCATION WITH VENDOR.
- 13 PROVIDE HUBBELL PEDESTAL STYLE FLOOR BOX MSC3058A WITH SINGLE RECEPTACLE PLATE #SS3095 AND SINGLE 20 AMP HEAVY DUTY RECEPTACLE #HLB310, OR EQUAL FOR CONNECTION TO HOLD ROOM MODULAR FURNITURE. MOUNT DIRECTLY OVER EXISTING CORE DRILLED HOLE. UTILIZE EXISTING JUNCTION BOXES IN SECOND LEVEL CEILING FOR WIRING. REFERENCE SHEET NOTE #6

Portland International Jetport
 1001 Westbrook Street
 Portland, Maine 04102

Gensler
 2020 K Street, NW
 Suite 200
 Washington, DC 20006
 Telephone 202.771.5200
 Facsimile 202.872.8587

oest ASSOCIATES, INC.
 363 Oyster Road, South Portland, ME 04106
 P: (207) 761-1770 F: (207) 774-1246 www.oest.com
 engineers - architects - surveyors - construction managers

amec
 343 Gorham Road, South Portland ME 04106
 P: (207) 761-1770 F: (207) 774-1246 www.amec.com


THESE DRAWINGS ARE ISSUED FOR CONSTRUCTION AND REFLECT ALL AMEC ISSUED BULLETINS AND SKETCHES.

Issue	Date & Issue Description	By	Check
01	07/11/06	LAM	BHG
02	09/22/08	LAM	BHG
03	12/03/08	LAM	BHG
04	01/23/09	LAM	BHG
05	10/28/09	LAM	BHG
06	11/02/09	LAM	BHG
07	11/20/09	LAM	BHG
08	03/09/11	LAM	BHG
09	03/14/11	LAM	BHG
10	09/01/11	LAM	BHG
	ISSUED FOR CONSTRUCTION		

GENERAL NOTES

- A SEE SHEET E00.00 FOR LEGEND AND GENERAL NOTES.
- B CONTRACTOR SHALL REFER TO FIRE ALARM, SECURITY, IT, AND PUBLIC ADDRESS SYSTEMS DRAWINGS FOR CONDUITS & WIRING REQUIREMENTS.

KEY PLAN

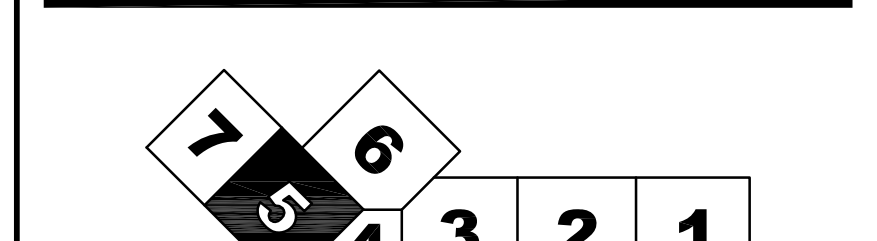

ELECTRICAL POWER PLAN - LEVEL 3 - ZONE 5
 SCALE: 1/8" = 1'-0"

E02.03.05

©2009 Gensler