GENERAL NOTES:

- 1. BRICK SIDEWALK DAMAGED DURING CONSTRUCTION TO BE REPLACED AND REBUILT
- TO CITY STANDARD.

 2. CONTRACTOR SHALL PLACE NEW CURBING IN LOCATIONS WITHOUT EXISTING CURBING, IN ACCORDANCE WITH DETAIL. EXISTING TIPDOWNS ARE LOCATED AT ALL
- CURB CUTS.


 3. THE SPACE BETWEEN THE FRONT PROPERTY LINE AND THE EXISTING CITY BRICK SIDEWALK EDGE IS PROPOSED TO BE PAVED AND STAMPED PER DETAIL.

 4. FINAL PATIO EXTENTS TO BE DEFINED BY THE CLIENT. PATIO SHALL NOT EXCEED 870 SF AND COMPLY WITH THE PROPOSE SLOPES PER C—30.
- 5. BOLLARDS TO BE INSTALLED WITH DOORS IN PLACE; FINAL LOCATION TO BE DEFINED BY AS—BUILT DOOR ASSEMBLY CONDITIONS. CONTRACTOR TO COORDINATE WITH ARCHITECT.

SPACE AND BULK STANDARDS				
ZONE: B-2b	REQUIRED	PROVIDED		
MINIMUM LOT SIZE	NONE	4,300 S.F.		
MINIMUM STREET FRONTAGE	20 FT.	65 FT.		
FRONT YARD SETBACK	MAX. 10 FT.	3.1 FT.		
SIDE YARD ON SIDE STREET	NONE	5.2 FT.		
REAR YARD	10 FT.	10.5 FT.		
MINIMUM LOT WIDTH	NONE	62 FT.		
MAXIMUM STRUCTURE HEIGHT	50 FT.	8.2 FT.		
MAXIMUM IMPERVIOUS SURFACE RATIO	90%	65%		
STRUCTURE SETBACKS	5' IF >35' HEIGHT	N/A		

PLANT SCHEDULE					
ID	BOTANICAL NAME	COMMON NAME	QTY	SIZE	
SHRUBS					
ТО	THUJA OCCIDENTALIS 'SMARAGD'	EMERALD GREEN ARBORVITAE	2	3 GAL	
AB	ABIES BALSAMEA 'NANA'	BALSAM DWARF FIR	4	1 GAL	

LEGEND		
HATCH STYLE	ASSOCIATED AREAS	
	BRICK SIDEWALK	
	STAMPED PAVEMENT	
* * * * * * * * * * * * * * * * * * *	ESPLANADE	
	CONCRETE	
+ + + + + + + + + + + + + + + + + + + +	UTILITY CUTS	
£	SNOW STORAGE AREA	

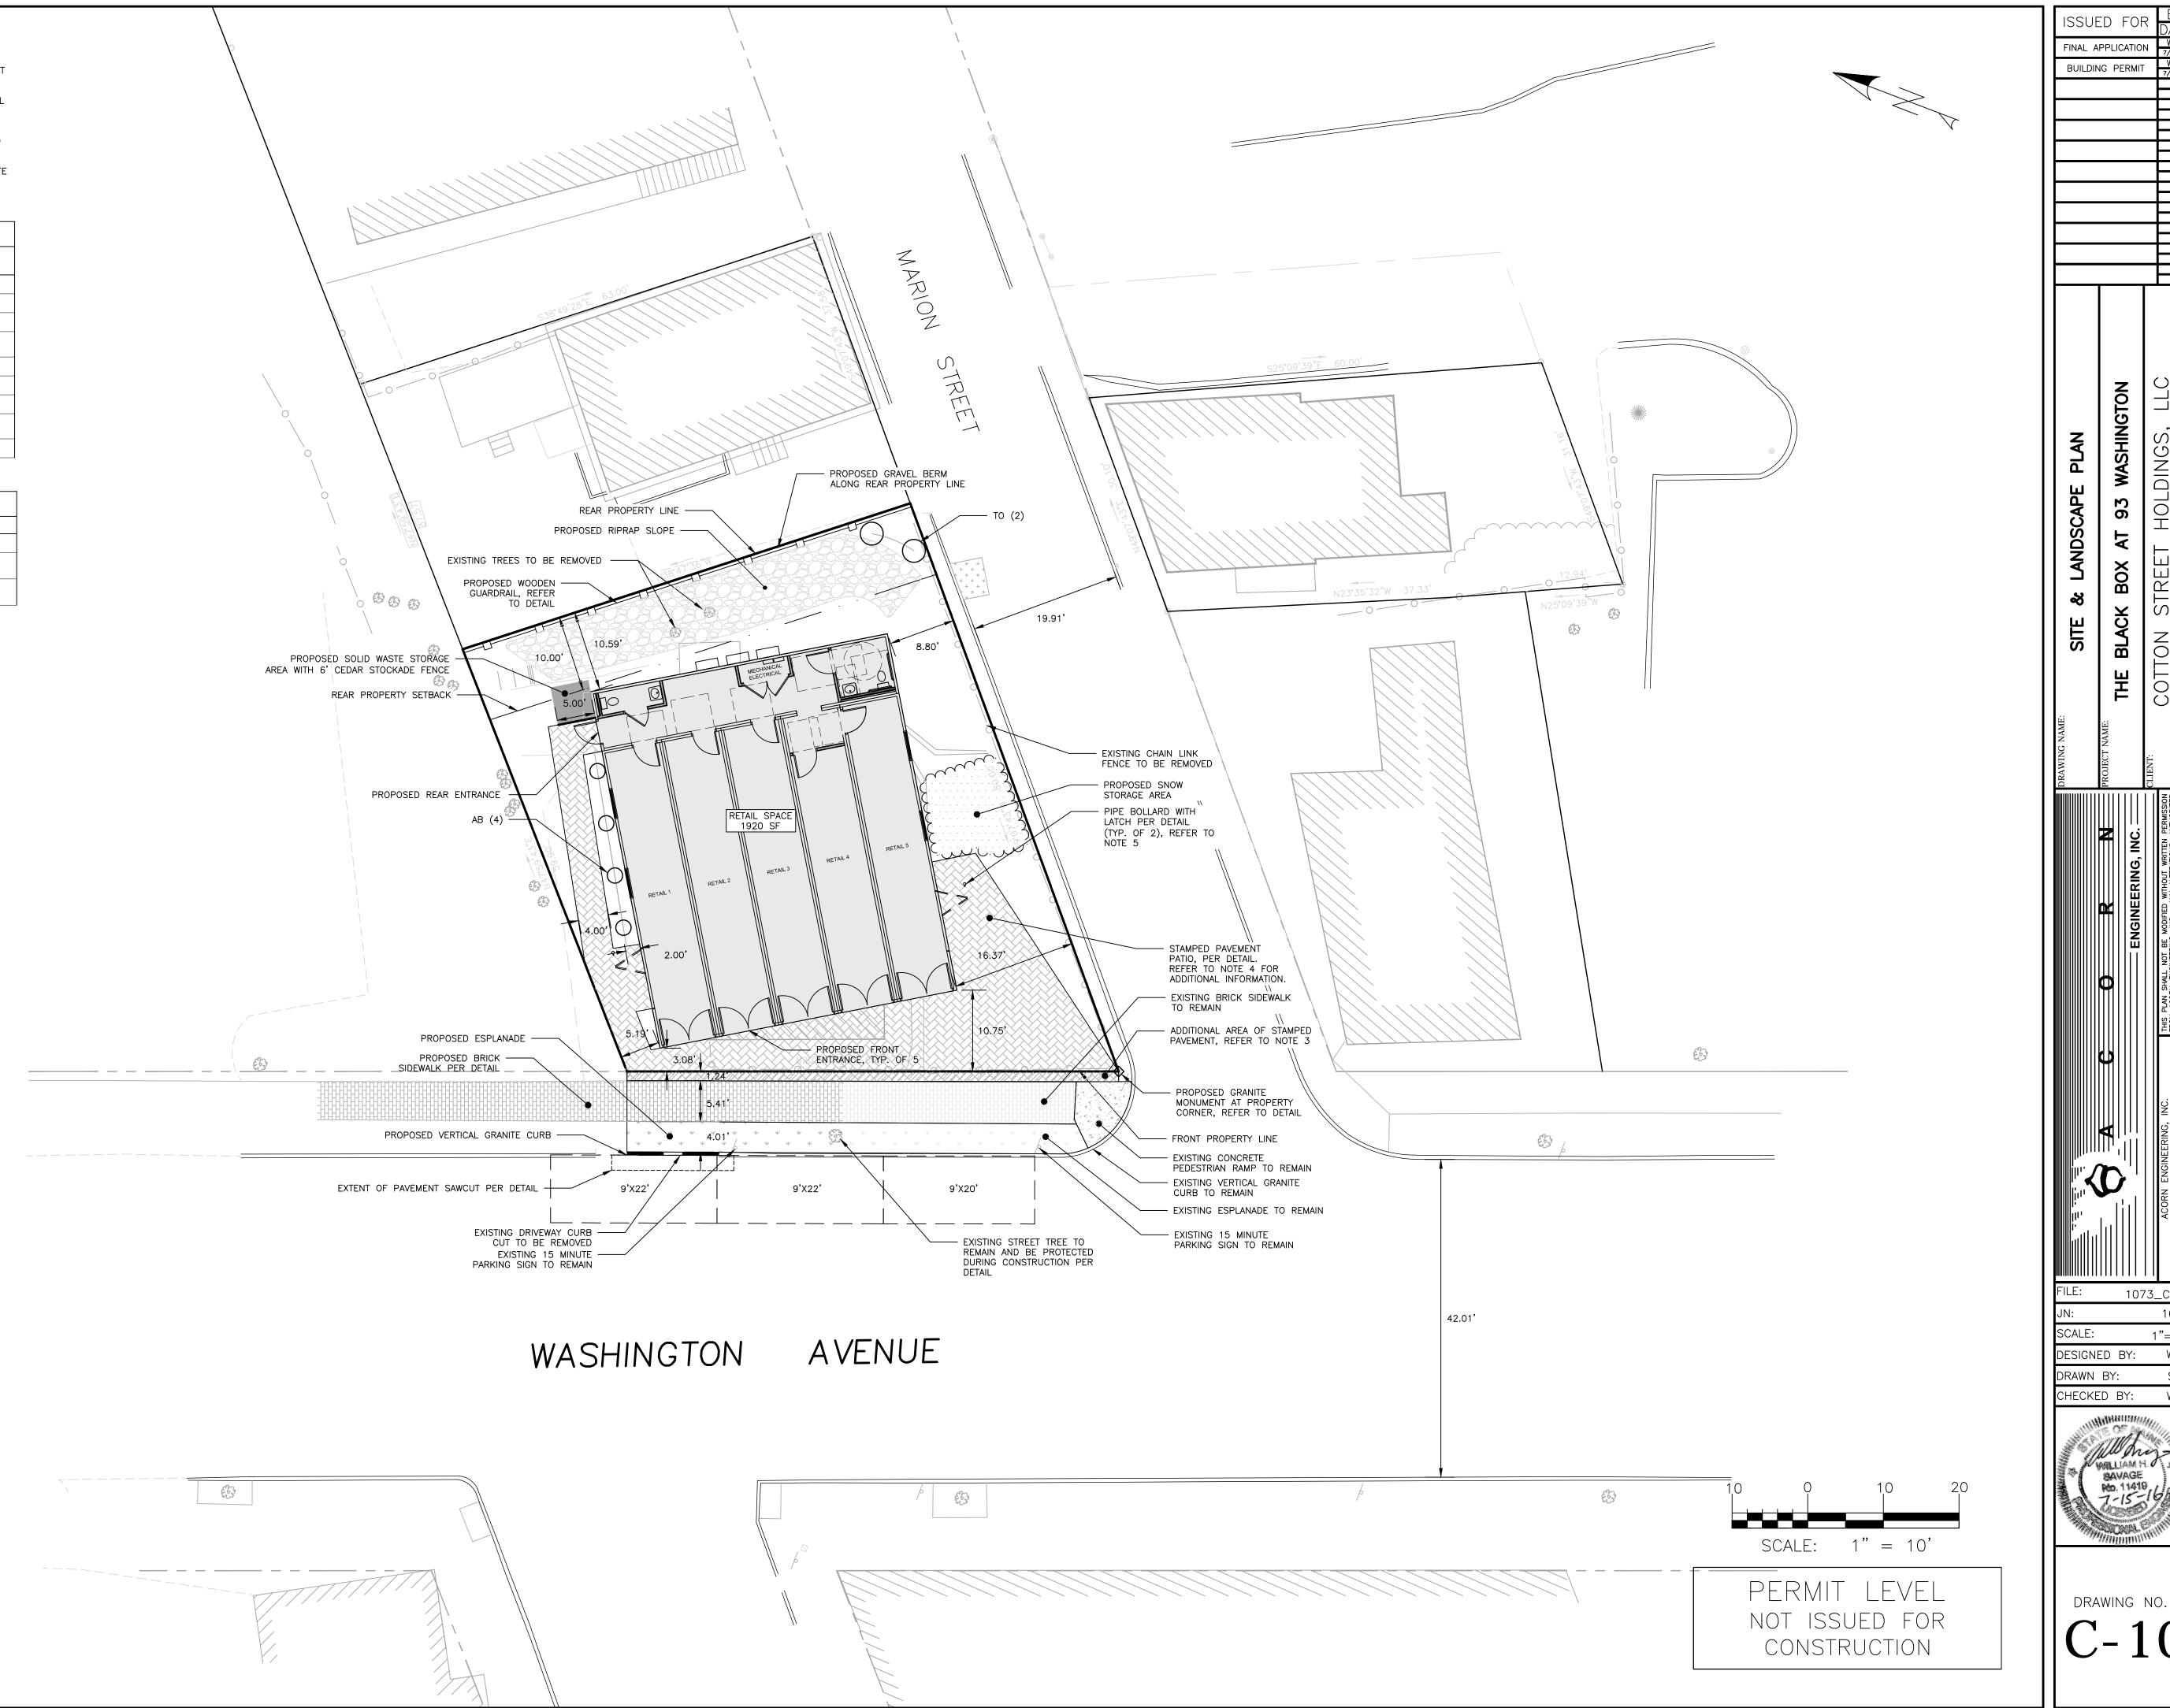

1073_CIVI