


EDWARD JONES GENERAL BUILDING AND FINISH SPECIFICATIONS:

12. LOW VOLTAGE (ALSO KNOWN AS PHONE/DATA CABLING) CONDUIT-DEISED PREMISES
- a. CONDUIT STUB-UPS TO BE INSTALLED IN NEW WALLS WHERE PHONE/DATA/PRINTERS ARE SHOWN ON THE FLOOR PLAN (INDICATED BY TRIANGLE) IF THE NEW CEILING IS DRYWALL, INSTALL CONDUIT FROM THE POINT OF CONNECTION (PHONES/DATA/PRINTER LOCATIONS INDICATED WITH 'v') AND STUB ABOVE CEILING WITH PULL STRING RUN TO THE POINT OF TERMINATION (CLIENT SERVER OR BOC).
 - b. CONFIRM ACTUAL LOCATIONS ON FLOOR PLAN SHEET 2 OF 6 PRIOR TO INSTALLATION. EXISTING CONSTRUCTION - CONDUIT NOT TO BE DONE IF IT REQUIRES REMOVAL OF DRYWALL EXISTINGS OR CEILING. UNLESS PRIOR APPROVAL RECEIVED FROM EDJ DESIGNER. IF WIREMOLD PRODUCT IS REQUIRED, INSTALL PANDEUT FACEWAY LD10E16-A.
 - c. PROVIDE ONE SINGLE GANG BOX (ONE PER TRIANGLE) AND PULL STRING AT EACH CONDUIT LOCATION. LABEL PULL STRINGS AT POINT OF TERMINATION (BOC) WITH ROOM NUMBER OF POINT OF CONNECTION.
 - d. IF WALLS ARE EXISTING AND CONDUIT IS NOT INSTALLED, PROVIDE PULL STRING AND CUT IN A NEW BOX AT THE SAME LOCATIONS.
 - e. STANDARD STUB-UP QUANTITY: TEN (10) 3/4" DIA.ETER LOCATIONS, UNLESS NOTED OTHERWISE ON PLANS - INDICATED BY TRIANGLE SYMBOL ON FLOOR PLANS.
 - f. 3/4" CONDUIT LOCATIONS
 - (2) AT BOA (ROOM 101)
 - (1) AT FA OFFICE (ROOM 102)
 - (4) AT BOC INTO DOUBLE GANG BOXES
 - (2) AT INCOMING PHONE/DATA LINES TO BOC PER PLAN (ONE ACTIVE FOR PHONES AND ONE W/ #6 GROUND WIRE RUN FROM BOX TO ELECTRICAL PANEL TO GROUND BOX FOR DATA)
 - (1) AT OPEN 106
 - f. ALL BOXES AND CONDUIT AT BOC LOCATION TO BE INSTALLED PER DETAIL BELOW. #6 GROUND WIRE MUST BE INSTALLED AND TERMINATED ON A BUSBAR FOR #6 WIRE MOUNTED ON THE BOTTOM CORNER OF THE BACK BOARD. THE BUSBAR SHOULD HAVE 4 TO 6 TERMINALS.

BOC REQUIREMENTS:

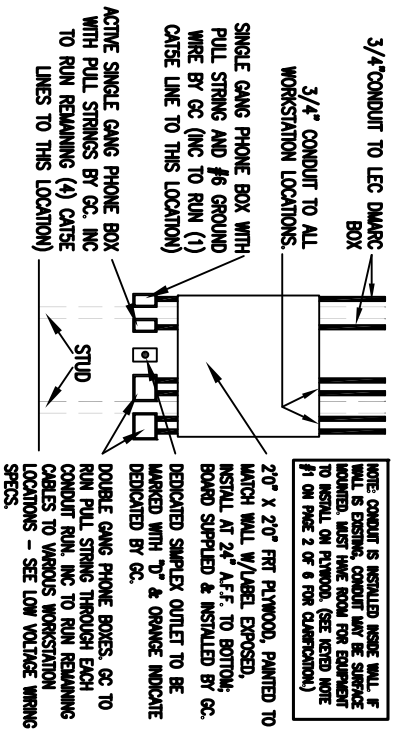

CONDUIT AND PHONE LINES FROM BUILDING SOURCE TO EXTENDED DEMARC (BOC)

- a. GENERAL CONTRACTOR TO INSTALL (2) 3/4" CONDUIT FROM THE BUILDING SOURCE TO THE EXTENDED DEMARC LOCATION WITHIN THE BRANCH (BOC LOCATION SHOWN ON PLAN) AS WELL AS COORDINATE WITH INC TO INSTALL CATSE PLENUM RATED PHONE LINES IN QUANTITY SPECIFIED ON PAGE 2. INC CONTRACT INFORMATION IS AVAILABLE ON SHEET 1 OF 6.

*****IF DATA LINES ENTER BUILDING AT A DIFFERENT LOCATION THAN PHONE LINES, (1) CONDUIT WILL NEED TO COME FROM THE DATA SOURCE TO THE GROUND BOX AT THE BOC LOCATION, THE REMAINING CONDUIT SHOULD BE RUN IN FROM THE PHONE LINE SOURCE TO THE BOC LOCATION*****

- b. CONTACT BRANCH FACILITIES IMMEDIATELY IF THERE ARE ANY QUESTIONS REGARDING THE NUMBER OF PHONES LINES OR LOCATION OF DEMARC EXTENSION CONDUIT.

LOW VOLTAGE WIRING (ALSO KNOWN AS PHONE/DATA CABLING)

- a. LOW VOLTAGE IMPLIES THE ACTUAL WIRE OR CABLE THAT IS RUN FROM THE BOC TO EACH PHONE, COMPUTER, PRINTER, AND FUTURE WORKSTATION LOCATION. WITH THE EXCEPTION OF THE DEMARC EXTENSION (BOC) REFERENCED IN SECTION 5, LOW VOLTAGE WORK IS DONE BY EDWARD JONES BRANCH INSTALL DEPT. THROUGH A PREFERRED NATIONAL VENDOR, CBIZ. THIS WORK IS DONE AFTER THE SPACE IS TURNED OVER TO EDWARD JONES.

13. MISCELLANEOUS
- a. FIXED WINDOW (ONLY IF SHOWN ON PAGES 2 & 3)
 1. NEW INTERIOR WINDOW BETWEEN FA OFFICE AND BOA AREA TO BE A FIXED, 42"W X 50"H AND INSTALLED AT 42" A.F.F., UNLESS NOTED OTHERWISE: FRAME TO BE WOOD (OR TO MATCH DOOR FRAMES)
 2. PAINT WOOD TRIM WHITE TO MATCH DOOR/FRAME COLOR.
 3. GLASS TO BE CLEAR, 1/4" TEMPERED STATIONARY PANEL. GLIBERS AND MIRRORED WINDOWS NOT ALLOWED.
 - b. FIREPLACES, STOVES, SHOWERS, TUBS
 1. ALL GAS AND PLUMBING LINES TO THESE ELEMENTS/FIXTURES TO BE RENDERED INOPERABLE AND ALL LINES TO BE CAPPED.
- b. IF LOW VOLTAGE WORK IS REQUIRED TO BE PERMITTED AND INSPECTED AS NOTED ON EXHIBIT A PRIOR TO CLOSING ANY NEW PARTITIONS, GENERAL CONTRACTOR IS TO COORDINATE THE INSTALLATION WITH EDWARD JONES PREFERRED NATIONAL VENDOR INC. CONTRACT INFORMATION IS AVAILABLE ON SHEET 1 OF 6. NOTE THAT PRE-WIRE IS NOT STANDARD AND IS ONLY DONE WHEN REQUIRED VS. BEING DONE FOR CONVENIENCE. THERE IS A WIRING SPECIFICATION AVAILABLE FOR PROJECTS REQUIRING PREWIRE. NOTIFY BRANCH FACILITIES OF LOW VOLTAGE REQUIREMENTS NEEDED IN ORDER TO OBTAIN CERTIFICATE OF OCCUPANCY.
1. ELECTRICAL BOXES - 4X2-1/8" HANDY BOX MUST BE USED, PER DIAGRAM BELOW FOR ALL LOW VOLTAGE APPLICATIONS IN NEW WALLS AND CONCRETE WALLS.
 2. MUD RINGS - MPLS METAL SINGLE GANG DRYWALL MOUNTING PLATE, PER DIAGRAM BELOW FOR ALL LOW VOLTAGE APPLICATIONS IN EXISTING WALLS.

SHEET	EXHIBIT A	Edward Jones BRANCH FACILITIES BRANCH OFFICE 99079	1042 BRIGHTON AVE STE 200 PORTLAND, ME 04102 SQUARE FOOTAGE 1060
		DATE: 12.5.2016	