


Products

- All-Fuel
- Stovepipe
- Pellet & Biofuels
- Relining
- Direct Vent
- Gas
- Polypropylene
- Special Gas Vent
- Pressure Stack

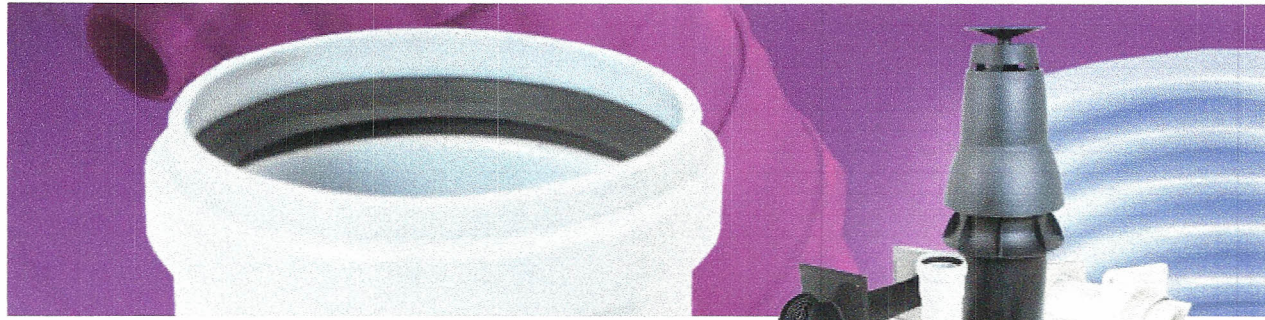

## PolyPro®


Polypropylene venting products for high-efficiency condensing appliance installations. Chloride free, environmentally safe. Listed to ULC-S636.

PolyPro and PVC/CPVC PVC pipes are commonly used for venting water heaters, condensing boilers and warm air furnaces, yet PVC was never designed for such use. An environmentally safe and engineered alternative is PolyPro, for condensing gas appliances. Engineered for venting, it is 100% recyclable, and contains no toxic or carcinogenic materials, chlorides, or heavy metals. PolyPro does not release hazardous gases during combustion, and has been used safely throughout Europe for over fifteen years. Polypropylene has a higher operating temperature limit of 230°F/110°C (PVC is 149°F/65°C max and CPVC is 194°F/90°C). PolyPro is engineered with a corrosion-free, condensation management system.


A chloride-free, fully engineered venting system designed for use with high efficiency furnaces, condensing boilers and tankless water heaters.

[See PolyPro approvals here.](#)

Reed® beveler, deburring and cutter tools available allowing for easy fitting installation. To order tools please visit [Reed's website.](#)



## New & Improved Locking System

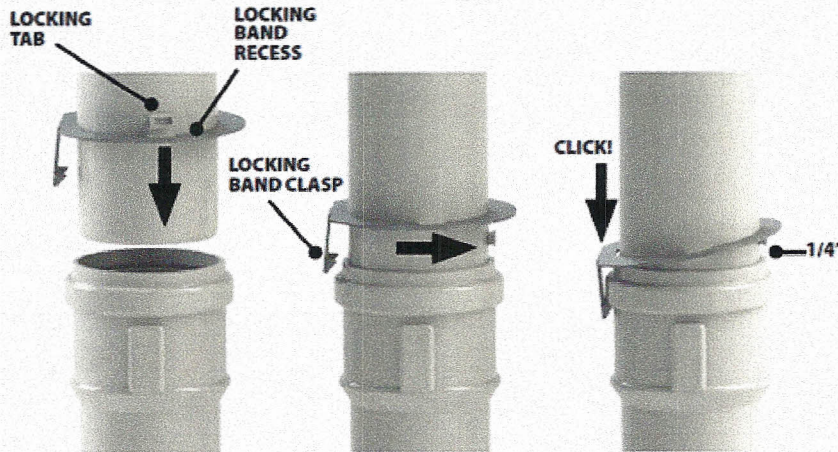

- Specifications
- Typical Installation
- Literature
- Warranty

### Applications

PolyPro is a polypropylene vent pipe for use with ANSI Category II and IV gas-burning appliances, including highefficiency water heaters, condensing boilers and warm air furnaces. Poly Pro is listed by Intertek to the ULC S636 standard in Canada as a Class IIA, IIB and IIC ve system suitable for exhaust temperatures up to 230°F / 110°C, and a maximum positive pressure of 15 in-w.c.

### Materials and Construction

Rigid pipe constructed of 2.2mm (minimum) thick polypropylene. Flex is double-wall polypropylene. EPDM or Viton gaskets.

### Clearances

0" clearance to combustibles for exhaust temperatures up to 194°F / 90°C, and 0" clearance for vertical installations up to exhaust

### Product Director

Not sure what product you need? Our NEW Product Director will guide you. Just answer a few simple questions to get started.

[Find Your Product »](#)

### Contact Us

Have a question about our products? We can help.