



PRO SERIES ROUND LED PANEL

RECESSED LED

Our LED panel lights have revolutionized recessed lighting applications across North America. The sleek and minimal construction allows for the easiest of installations.



KEY FEATURES

- ENERGY STAR certified
- Fully dimmable
- Wet locations rated

MODEL

7003	3" round panel light, 6W, 3000K, 400 Lumens
7003-4K	3" round panel light, 6W, 4000K, 400 Lumens, white finish only
7004	4" round panel light, 9W, 3000K, 600 Lumens
7004-4K	4" round panel light, 9W, 4000K, 600 Lumens
7006	6" round panel light, 12W, 3000K, 850 Lumens
7006-4K	6" round panel light, 12W, 4000K, 850 Lumens, white finish only

SPECIFICATIONS

- 120V direct connection.
- Every fixture includes a junction box with an integrated driver.
- Can be daisy chained.
- 80 CRI.
- Superior LED performance and lifespan.
- Smooth 360° wide spread.
- Minimal heat emission.
- Frosted lens.
- Edge lit technology.
- Aluminum construction.
- Very low profile.
- IC certification (suitable for direct contact with insulation).
- Air-tight certified as per ASTM E283-04.
- ENERGY STAR certified.
- Dimmable with most low-voltage electronic dimmers.
- Suitable for wet locations.
- FT4 certified wire.

INSTALLATION


- For recessed installation, approved with insulated ceilings.
- Ideal for general lighting applications.
- Can be installed in indoor and outdoor applications.

FINISH

BK	Black (7004 model only)
SN	Satin nickel
WH	White

ACCESSORIES

7000-EXT108	118" (300 cm) extension cord
7000-EXT230	230" (584 cm) extension cord
LEDDOWNACC-GOOF4	Coof ring for 4" panels (7004)
7003: LEDDOWNACC-RFP3	3 1/2" (8.9 cm) Rough-in plate
7004: LEDDOWNACC-RFP4	4 1/2" (11.4 cm) Rough-in plate
7006: LEDDOWNACC-RFP6	6 5/8" (16.8 cm) Rough-in plate

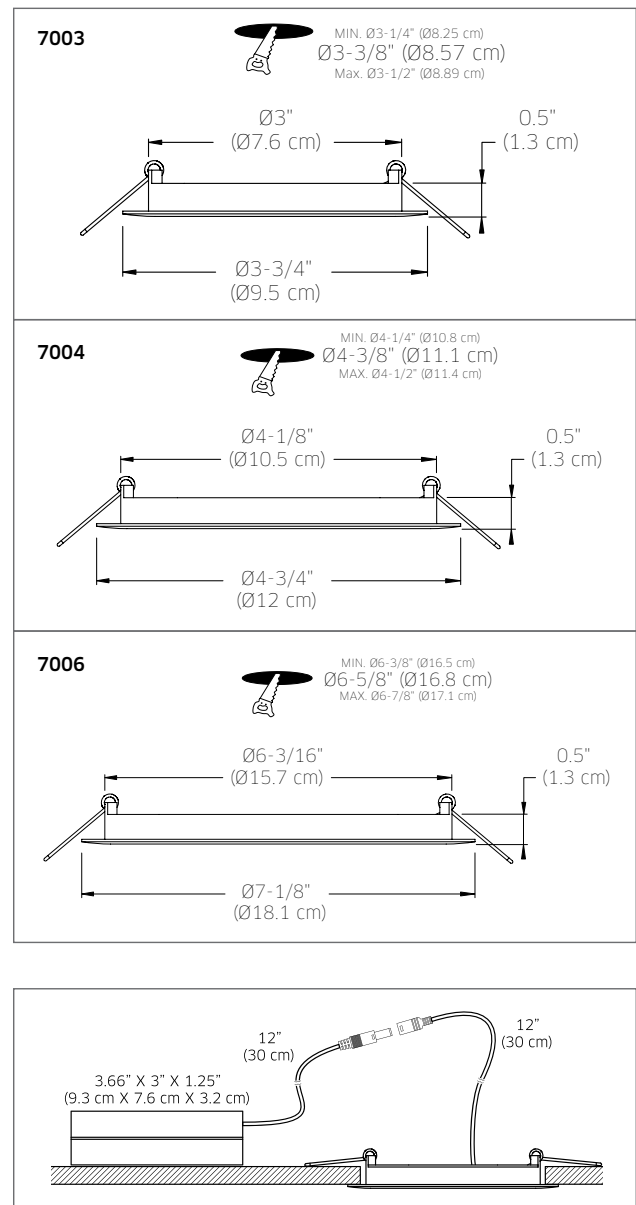

ORDERING EXAMPLE

7004-4K-WH
Would order a white 4" round panel with a LED array with 600 Lumens at 4000K.