


PERMIT SET

DRAFTSPERSON:
Patrick Boehmer, AIA
John Jacques
7/21/17
PROJECT STATUS:
Permit Set



**221 Congress Street
Hay Runner Block**
221 BLOCK, LLC
221 Congress Street Portland ME 04101

RAILING AND MECH SCREEN
DETAILS
A-4.5

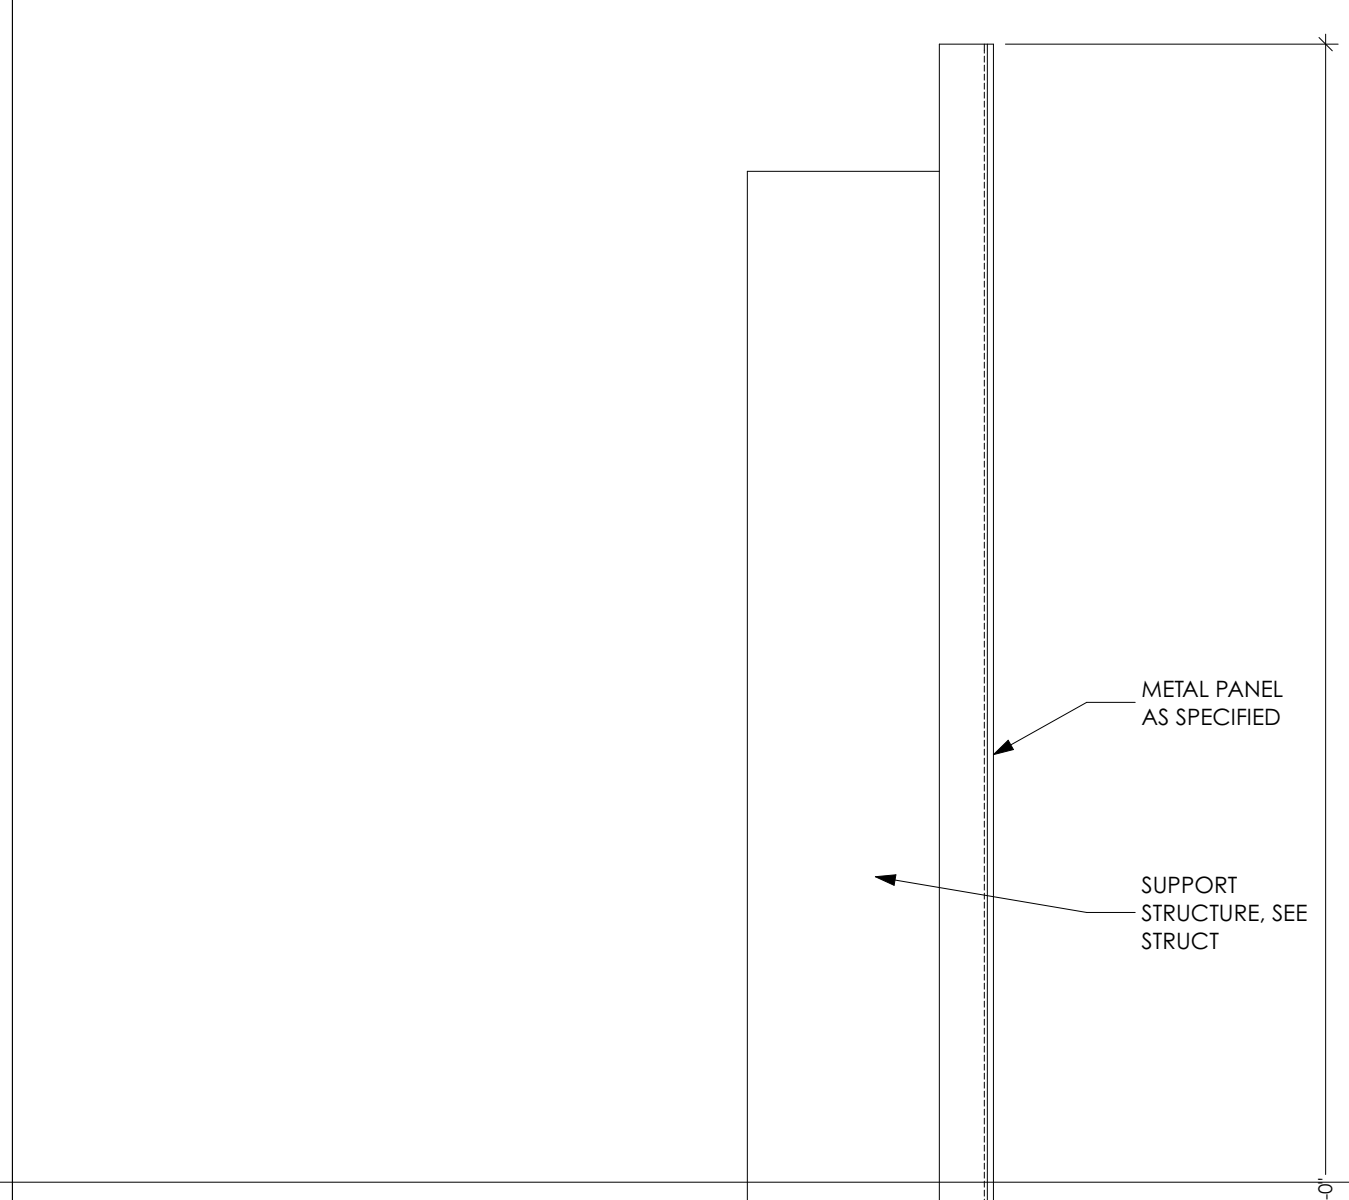

MECHANICAL
YARD SIDE

2 MECHANICAL SCREEN DETAIL
SCALE: 3" = 1'-0"

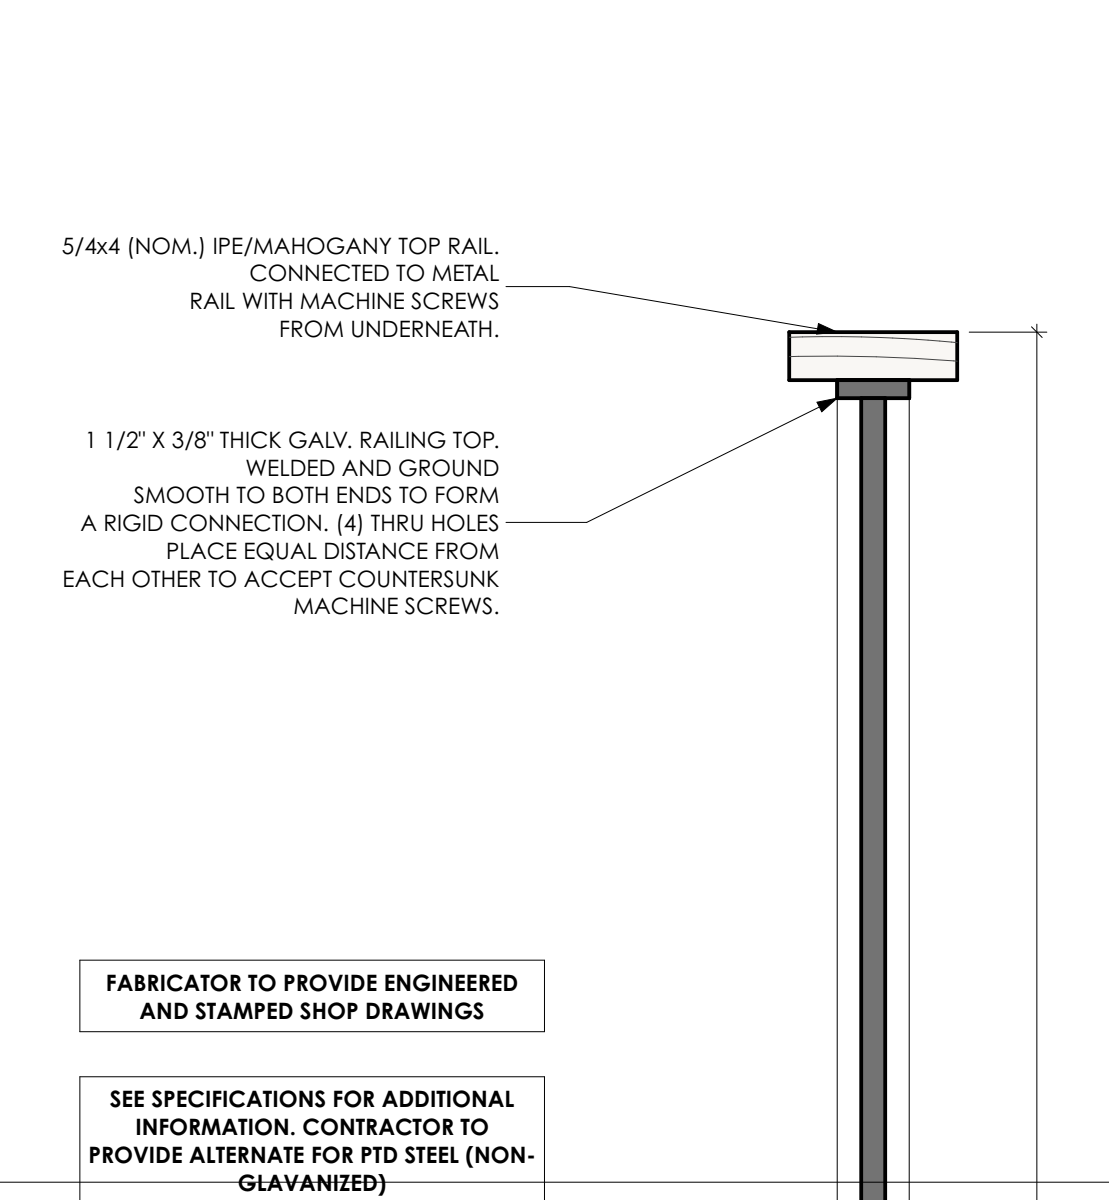

FABRICATOR TO PROVIDE ENGINEERED AND STAMPED SHOP DRAWINGS
SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION. CONTRACTOR TO PROVIDE ALTERNATE FOR PTD STEEL (NON-GLAVANIZED)

1/2" X 1/2" GALV. SOLID STEEL BAR, PLACED 4" O.C. TYP. WELDED AND GROUND SMOOTH @ VERTICALS.
1 1/2" X 3/8" HORIZONTAL GALV.
1 1/2" X 3/8" THICK GALV. RAILING VERTICAL, ON BOTH ENDS OF MODULAR SYSTEM AND WELDED AND GROUND SMOOTH WITH TOP PLAT TO MAKE RIGID.
3 1/2" X 3 1/2" X 3/8" THICK GALV. BASE PLATE WELDED AND GROUND SMOOTH, SEE DETAILS WHERE BASE PLATE OCCURS

DECKING

1 TYPICAL RAILING AT 5TH FLOOR
SCALE: 3" = 1'-0"

