

by Honeywell

## Description

The PM-9 Power Supply is a component of NetSOLO<sup>®</sup> and E3 Series<sup>®</sup> fire alarm and voice evacuation systems. It provides power to the INX Transponder assembly and all E3 Series components.

The PM-9 is a switching power supply that provides 9 amperes of filtered and regulated 24 VDC (nominal). It has an internal battery charging circuit capable of maintaining up to fifty-five (55), A/H batteries. This module is designed for use with the Gamewell-FCI distributed audio networks.

### Installation

Typically, the PM-9 Module can be mounted in the following E3 Series cabinets:

- Cabinet B and D, backbox.
- Cabinet C, INX-E3 sub-assembly plate.
- Cabinet C, INCC-E3 sub-assembly plate.


For instructions on installing the PM-9, refer to the E3 Series<sup>®</sup> Expandable Emergency Evacuation Installation/Operating Manual, Part Number: 9020-0574 or the PM-9 Installation Instructions, Part Number: 9000-0548.

## Specifications

<b>Input Voltage:</b>	120 VAC 60 Hz @ 3.5 A. max.
<b>Output Voltage:</b>	24 VDC (nominal) FWR
<b>Output Current:</b>	9 amperes
<b>Alarm Current:</b>	0.050 amp.
<b>Operating Temperature:</b>	32° to 120° F (0° to 49° C)
<b>Relative Humidity:</b>	0 to 93% (non-condensing) at 90° F (32° C)
<b>Dimensions:</b>	10 1/2" W x 5" H x 2" D (27 x 13 x 5 cm)

E3 Series<sup>®</sup> and NetSOLO<sup>®</sup> are registered trademarks of Honeywell International Inc.

## PM-9 Power Supply

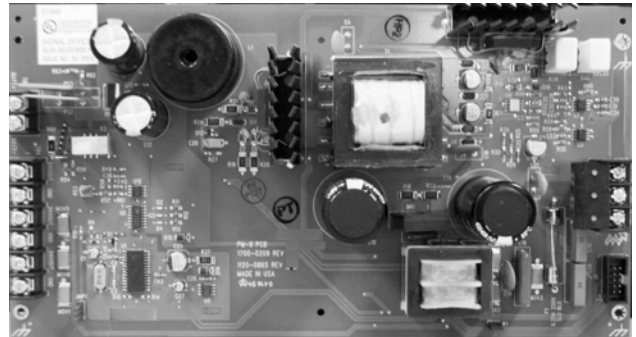

PM-9

## Features

- Listed under UL Standard 864, 9th Edition
- 9 ampere, filtered, regulated power supply
- Energy and space saving switching technology
- Integral battery charger capable of recharging up to fifty-five (55), AH batteries (Batteries not furnished)

## Ordering Information

Model	Description
PM-9	Power supply

An ISO 9000-2000 Company



### GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2007 by Honeywell International Inc. All rights reserved.

[www.gamewell-fci.com](http://www.gamewell-fci.com)

9020-0555 Rev. g page 1 of 1