GOODWILL INDUSTRIES OF NORTHERN NEW ENGLAND

75 WASHINGTON AVENUE

PORTLAND, MAINE

ABBREVIATIONS

ALUM OR AL	ALUMINUM	GALV	GALVANIZED	S	SOUTH
AWP	ACOUSTICAL WALL PANEL	GB	GRAB BARS	SC	SHOWER CURTAIN
ACT	ACOUSTICAL CEILING TILE	GC	GENERAL CONTRACTOR	SD	SOAP DISPENSER
BIT	BITUMINOUS	GWB	GYPSUM WALL BOARD	SCHED	SCHEDULE
BM	BENCH MARK	HC	HANDICAP	SECT	SECTION
BOT	BOTTOM	HD WD	HARDWOOD	SHT	SHEET
BRG	BEARING	HDR	HEADER	SIM	SIMILAR
BRK	BRICK	HDWE	HARDWARE	SND	SANITARY NAPKIN DISPOSAL
C	CARPET	HM	HOLLOW METAL	SQ	SQUARE
CAB	CABINET	HORIZ	HORIZONTAL	SSS	SYNTHETIC SPORTS SURFACE
CB	CHALK BOARD	HT	HEIGHT	STD	STANDARD
CC	CENTER TO CENTER	ID	INSIDE DIAMETER	STL	STEEL
CH	CONCRETE HARDENER	IF	INSIDE FACE	STRUCT	STRUCTURAL
CJ	CONTROL JOINT	IN	INCHES	SV	SHEET VINYL
CL	CENTER LINE	INSUL	INSULATION	T	TEMPERED (GLASS)
CLG	CEILING	INT	INTERIOR	TB	TACK BOARD
CMU	CONCRETE MASONRY UNITS	LOC	LOCATION	THK	THICKNESS
CONC	CONCRETE	M	MARBLE	TO	TOP OF
CONT	CONTINUOUS	MAS	MASONRY	TOB	TOP OF BEAM
CONST	CONSTRUCTION	MAX	MAXIMUM	TOM	TOP OF MASONRY
CONTR	CONTRACTOR	MB	MARKER BOARD	TOW	TOP OF WALL
CT	CERAMIC TILE	MECH	MECHANICAL	TP	TOILET PAPER DISPENSER
DBL	DOUBLE	MFGR	MANUFACTURER	TYP	TYPICAL
DF	DRINKING FOUNTAIN	MIN	MINIMUM	UNO	UNLESS NOTED OTHERWISE
DIA	DIAMETER	MISC	MISCELLANEOUS	VB	VAPOR BARRIER
DIM	DIMENSION	MO	MASONRY OPENING	VCT	VINYL COMPOSITION TILE
DNA	DOES NOT APPLY	MR	MOP RECEPTOR	VERT	VERTICAL
DTL	DETAIL	MRGB	MOISTURE RESISTANT GYPSUM BOARD	VWC	VINYL WALL COVERING
DWG	DRAWING	MTL	METAL	W	WEST
E	EAST	N	NORTH	W/	WITH
EA	EACH	NA	NOT APPLICABLE	WC	WATER CLOSET
EF	EACH FACE	NIC	NOT IN CONTACT	WD	WOOD
EJ	EXPANSION JOINT	NO	NUMBER		
EL	ELEVATION	NOM	NOMINAL		
ELEC	ELECTRICAL	NTS	NOT TO SCALE		
ELEV	ELEVATOR	OA	OVERALL		
EMHO	ELECTROMAGNETIC HOLD OPEN	OC	ON CENTER		
EQ	EQUAL	OD	OUTSIDE DIAMETER		
EW	EACH WAY	OPNG	OPENING		
EWC	ELECTRIC WATER COOLER	OPP	OPPOSITE		
EXIT OR (E)	EXISTING	OF	OUTSIDE FACE		
EXP	EXPANSION	P	PAINT		
EXT	EXTERIOR	PTD	PAINTED		
FD	FLOOR DRAIN	PL	PLATE		
FDN	FOUNDATION	PLY WD	PLYWOOD		
FE	FIRE EXTINGUISHER	PNL	PANEL		
FFE	FINISH FLOOR ELEVATION	P.A.	PRESSURE TREATED		
FIN	FINISH	PT & D	PAPER TOWEL AND WASTE DISPENSER		
FIN FL OR FFFINISH FLOOR		PTN	PARTITION		
FIN GR	FINISH GRADE	RD	ROOF DRAIN		
FL	FLOOR	RE	REFER		
FR	FIRE RATING	REF	REFRIGERATOR		
FRMG	FRAMING	REINF	REINFORCED		
FT	FEET (FOOT)	REQD	REQUIRED		
FV	FIELD VERIFY	RM	ROOM		
FWC	FABRIC WALL COVERING	RO	ROUGH OPENING		
G	GRANITE				
GA	GAUGE				

LEGEND

- BUILDING SETION MARKER
- CEILING TAG (ACT1 / 8'-0")
- COLUMN CENTER LINE (1)
- DETAIL MARKER
- DOOR TAG (101)
- EXTERIOR ELEVATION
- INTERIOR ELEVATION (A1 / A920)
- PLANT TAG (200 — HPD)
- REVISION CLOUD WITH TAG (1)
- ROOM TAG (ROOM / A101)
- SECTION MARKER
- WALL TYPE (WT1)
- WINDOW TAG (A)

GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS, AND REPORT ANY DISCREPANCIES TO THE ARCHITECT. CONTRACTOR SHALL PROCEED WITH THE WORK ONLY AFTER DISCREPANCY HAS BEEN RESOLVED WITH THE ARCHITECT.

2. DO NOT ALTER OR PENETRATE ANY EXISTING STRUCTURAL ELEMENTS, EXTERIOR WALL COMPONENTS, OR FIRE RATED WALLS

3. THE LOCATIONS OF DOORS NOT DIMENSIONED SHALL BE 6 INCHES FROM ADJACENT WALL.

4. THE BUILDING SHALL BE CONSTRUCTED TO CONFORM WITH ALL APPLICABLE CODES INCLUDING, BUT NOT LIMITED TO, THE LATEST EDITIONS OF IBC, BOCA, NFPA 101, ANSI, & ADA.

5. ALL WOOD IN CONTACT WITH CONCRETE SHALL BE PRESSURE PRESERVATIVE TREATED & ALL CONNECTIONS TO BE STAINLESS STEEL.

6. CONTRACTOR SHALL WORK FROM GIVEN DIMENSIONS AND LARGE SCALE DETAILS ONLY. DO NOT SCALE THE DRAWINGS.

7. GC/CM SHALL REVIEW AND CONFORM TO BUILDING GUIDELINES FOR CONSTRUCTION.

8. EXISTING BUILDING COMPONENTS WHICH ARE AFFECTED BY NEW WORK AND DEMOLITION, OR WHICH MAY BE DAMAGED BY THE CONTRACTOR OR ANY SUBCONTRACTORS SHALL BE REPLACED OR RESTORED TO ORIGINAL CONDITION AND COLOR BY METHODS DESCRIBED IN THIS CONTRACT OR AS APPROVED BY THE ARCHITECT. THE GENERAL CONTRACTOR SHALL SEAL, PATCH AND FILL ANY FLOOR AND/OR WALL PENETRATIONS DUE TO DEMOLITION/CONSTRUCTION.

9. INSTALL BLOCKING BEHIND ALL SURFACE APPLIED FIXTURES, TRIM, CABINETS, COUNTER TOPS, AND GRAB BARS WHEN MOUNTED ON STUD WALLS.

10. PROVIDE (5) 2" DIAMETER CONCRETE FLOOR CORE DRILLS TO SUPPLY POWER AND DATA TO FEATURE WALLS, MILLWORK AND CONFERENCE ROOMS.

11. CONTRACTOR SHALL VERIFY SIZE AND LOCATION OF EXISTING MECHANICAL AND PLUMBING ELEMENTS. CONTRACTOR SHALL RENOVATE EXISTING ALARM SYSTEM TO MAINTAIN CONFORMANCE TO NFPA 13 & 101. CONTRACTOR SHALL VERIFY SIZE & LOCATION OF ALL ELECTRICAL SERVICES AND EQUIPMENT.

12. INSTALL MOISTURE RESISTANT GYPSUM BOARD IN LAVATORIES, AND ALL OTHER HIGH HUMIDITY AREAS.

13. FINISHES: FINISHES OTHER THEN THE STANDARD FINISHES ARE ALL INDICATED ON THE DRAWINGS, CEILING FINISHES ARE SHOWN ON THE REFLECTED CEILING PLANS AND ALL OTHER FINISHES ARE SHOWN ON THE INTERIOR FINISH LEGEND AND SCHEDULE AND/OR INTERIOR ELEVATIONS. FINISHES INDICATED FOR A PARTICULAR ROOM OR SPACE ARE APPLICABLE FOR THE ENTIRE ROOM OR SPACE, UNLESS OTHERWISE NOTED.

14. ALL EXPOSED SURFACES ARE TO BE PAINTED, WHETHER OR NOT INDICATED ON THE DRAWINGS, EXCEPT AS FOLLOWS: WHERE SPECIAL COATINGS ARE INDICATED; PREFINISHED ITEMS, CONCEALED SURFACES, OPERATING PARTS, AND LABELS. IF PREFINISHED, PAINTING THE FOLLOWING: EXPOSED MECHANICAL DUCTWORK, WALL DIFFUSERS, GRILLES AND LOUVERS, ROOF TOP MECHANICAL EQUIPMENT, AND SPEAKER GRILLES. FINISHED METAL SURFACES, EXCEPT AS LISTED ABOVE. SEE SPECIFICATIONS ON DRAWINGS IDENTIFYING THE TYPES OF PAINTS AND SPECIALTY COATINGS TO BE USED IN ACCORDANCE WITH MATERIAL BEING PAINTED OR COATED.

15. BUILDING INSULATION: PROVIDE AS INDICATED ON WALL DETAILS AND IN ACCORDANCE WITH PARTITION TYPES, WHETHER OR NOT SHOWN IN DETAILS AND DRAWINGS. FOR DRAWING CLARITY, INSULATION MAY NOT BE SHOWN, EVEN IF IT IS PROVIDED.

16. CONTRACTOR SHALL SUBMIT SAMPLES OF ALL INTERIOR FINISHES FOR ARCHITECT'S REVIEW.

17. THE DESIGN AND INSTALLATION OF THE FIRE PROTECTION SYSTEMS SHALL BE PROVIDED THROUGH A DESIGN/BUILD CONTRACT UNDER THE GENERAL CONTRACTOR/CONSTRUCTION MANAGER.

18. GENERAL CONTRACTOR/CONSTRUCTION MANAGER SHALL SUPPLY POWER AND COORDINATION TO THE TENANT SUPPLIED SYSTEMS FURNITURE AND EQUIPMENT.

19. A .GENERAL CONTRACTOR/CONSTRUCTION MANAGER SHALL SUPPLY POWER AND CONDUITS WITH PULL-STRINGS FOR DATA AND TELEPHONE TO ALL OWNER SUPPLIED WORKSTATIONS. THE DESIGN AND INSTALLATION OF THE DATA AND TELEPHONE SYSTEMS SHALL BE THE RESPONSIBILITY OF THE TENANT. GENERAL CONTRACTOR TO PROVIDE CONDUIT WITH PULL-STRINGS TO ALL LOCATIONS RECEIVING DATA,TELEPHONE, AUDIO VISUAL AND SECURITY. B. REFER TO ALTERNATES FOR CABLING

20. THE DESIGN & INSTALLATION OF THE MECHANICAL, ELECTRICAL, AND PLUMBING SYSTEMS SHALL BE PROVIDED THROUGH A DESIGN/BUILD CONTRACT UNDER THE GENERAL CONTRACTOR/CONSTRUCTION MANAGER.\

21. NEW RESIDENTIAL KITCHEN APPLIANCES TO BE SUPPLIED BY TENANT. CM TO SUPPLY SERVICE AND INSTALLATION.

PROJECT DIRECTORY

OWNER:
GOODWILL INDUSTRIES
353 CUMBERLAND AVENUE
PORTLAND, ME 04101

ARCHITECT:
GAWRON TURGEON ARCHITECTS
29 BLACK POINT ROAD
SCARBOROUGH, MAINE 04074
207-883-6307

CONSTRUCTION MANAGER:
LANDRY FRENCH CONSTRUCTION
160 PLEASANT HILL ROAD
SCARBOROUGH, ME 04074

STRUCTURAL ENGINEER:
ALLIED ENGINEERING
160 VERANDA STREET
PORTLAND, ME 04103

LANDSCAPE ARCHITECT:
N/A

SITE/CIVIL ENGINEER:
N/A

DESIGN/BUILD MECHANICAL CONTRACTOR:
TITAN MECHANICAL
232 RIVERSIDE INDUSTRIAL PKWY
PORTLAND, ME 04103

DESIGN/BUILD ELECTRICAL CONTRACTOR:
BH MILIKEN
175 ANDERSON ST.
PORTLAND, ME 04101

ARCH. SPECIFICATION WRITER
N/A

SITE LOCATION MAP

PHASING PLAN/KEY PLAN

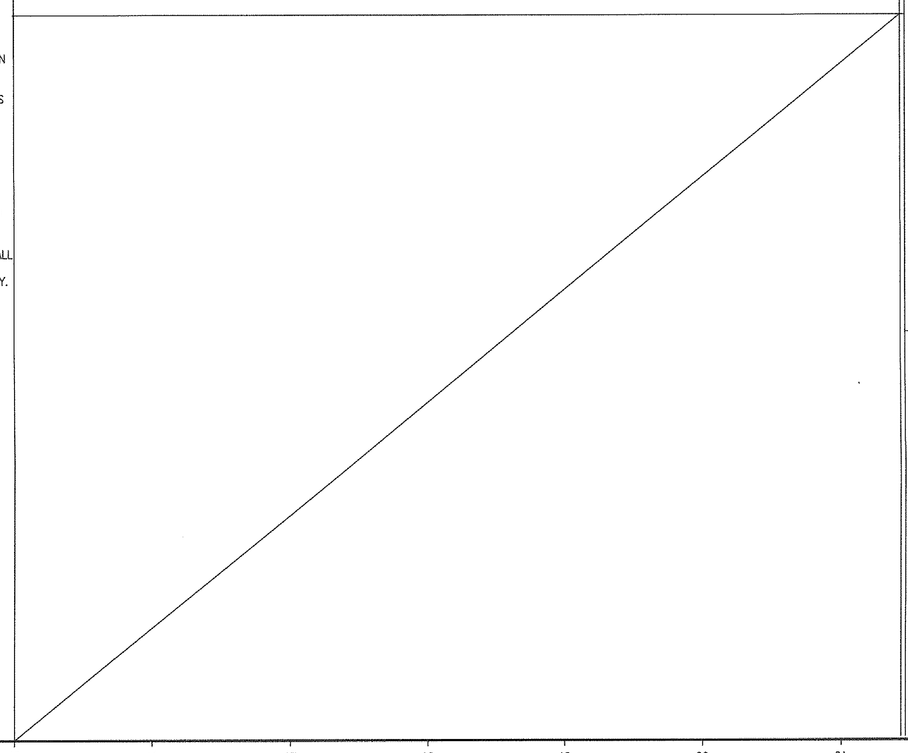

ARCHITECTURAL
MECH/ PLUMBING
ELECTRICAL

DRAWING INDEX			PERMIT SET 08.23.13
GENERAL	G101	TITLE SHEET & DRAWING INDEX	●
	G102	CODE REVIEW	●
SITE/CIVIL			
LANDSCAPING			
STRUCTURAL			
ARCHITECTURAL	EX100	EXISTING CONDITIONS THIRD FLOOR PLAN	●
	EX200	EXISTING CONDITIONS THIRD FLOOR POWER PLAN	●
	EX300	EXISTING CONDITIONS THIRD FLOOR REFLECTED CEILING PLAN	●
	D100	THIRD FLOOR DEMOLITION PLAN DEMOLITION NOTES/LEGEND	●
	A100	THIRD FLOOR PLAN PARTITION TYPES NOTES	●
	A200	THIRD FLOOR POWER PLAN,LEGEND/NOTES	
	A300	THIRD FLOOR REFLECTED CEILING PLAN SOFFIT DETAILS	●
	A800	DOOR SCHEDULE DOOR AND FRAME TYPES	
	A900	FINISH FLOOR PLAN ENLARGED PLANS INTERIOR DETAILS TRANISTION DETAILS	●
	A910	INTERIOR ELEVATIONS	●
	A941	INTERIOR FINISH LEGEND AND SCHEDULE	●
MECH/ PLUMBING			
ELECTRICAL			

REGISTERED ARCHITECT — STANLEY KOWALSKI GAWRON — 6811145 — STATE OF MAINE

Gawron Turgeon
ARCHITECTS
29 Black Point Road
Scarborough, Maine 04074
www.gawronturgeon.com
207-883-6307 tel 207-883-0361 fax

GOODWILL INDUSTRIES
353 CUMBERLAND AVENUE - THIRD FLOOR
75 WASHINGTON AVENUE
PORTLAND, MAINE

REVISIONS

#	DATE	DESCRIPTION
1	08.23.13	PERMIT SET

DATE:	08.23.13
PROJECT #	070313
DRAWN BY:	DLP
CHECKED BY:	MET
DRAWING SCALE	N.A.

SHEET TITLE
TITLE SHEET & DRAWING INDEX

G101

© COPYRIGHT 1985-2001
REPRODUCTION OR REUSE OF THIS DOCUMENT WITHOUT WRITTEN CONSENT OF GAWRON ARCHITECTS IS PROHIBITED

I:\2013\070313 - Goodwill - Architecture & Interiors\Permitting\Drawings\Permit Set\070313 - G101.dwg, 8/23/2013 2:39:13 PM, dlp