

Milne Spirit Works LLC  
Dba Hardshore Distilling Company  
59 Washington Avenue, Suite 1-E  
Portland, ME 04101


## G1-2: 4,000 CFM Intake Damper and Domed Hood Specs

### S&P USA Non-Powered Gravity Intake Ventilator Technical Details

Manufacturer: S&P USA  
Model: RXCII-I-20  
CFM-Rating: 4,000 CFM  
Horsepower: N/A  
Throat Area (sq. ft.): 2.4  
Nominal Damper Size: 28 inches x 28 inches

#### Dimensions:

A: 21.00 inches  
B: 29.50 inches  
C: 16.00 inches  
D: 36.00 inches

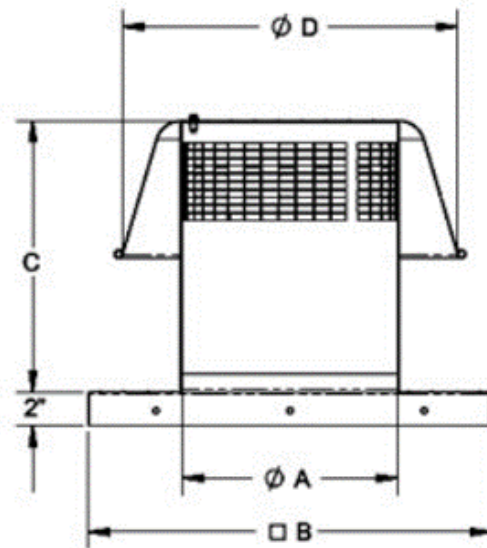

Material: Heavy-gauge aluminum

Add-ons: 21" x 21" motorized backdraft damper (240V, 3 phase)  
27.75" square galvanized roof curb, 12" high with insect screen

Ducting: 26-gauge G-60 galvanized steel

Hanging: 18 gauge flat stock when hung from rafters. Additional gussets will add support to the duct from the wall. Gussets will be fastened to both the walls and the ducting with standard fasteners.