

Milne Spirit Works LLC
Dba Hardshore Distilling Company
59 Washington Avenue, Suite 1-E
Portland, ME 04101


G1-4: 1,500 CFM Intake Damper and Domed Hood Specs

S&P USA Non-Powered Gravity Intake Ventilator Technical Details

Manufacturer: S&P USA
Model: RXCII-I-12
CFM-Rating: 1,500 CFM
Horsepower: N/A
Throat Area (sq. ft.) 0.9
Nominal Damper Size: 20 inches x 20 inches

Dimensions:

A: 13.00 inches
B: 24.00 inches
C: 10.00 inches
D: 25.00 inches

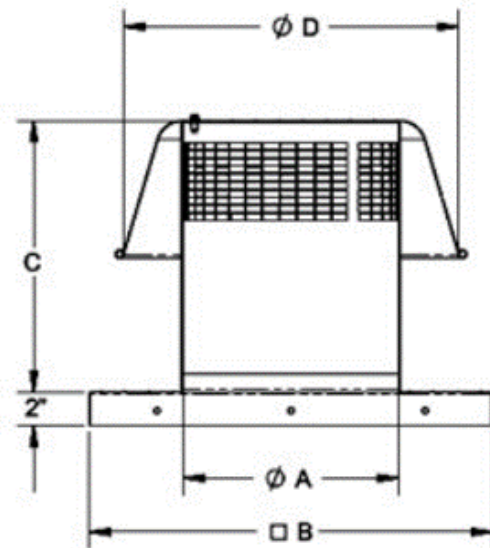

Material: Heavy-gauge aluminum
Add-ons: 15" x 15" motorized backdraft damper (240V, 3 phase)
22.75" square galvanized roof curb, 12" high with insect screen
Ducting: 26-gauge G-60 galvanized steel
Hanging: 18 gauge flat stock when hung from rafters. Additional gussets will add support to the duct from the wall. Gussets will be fastened to both the walls and the ducting with standard fasteners