


inside face of sidewalls: flash 18" above finish roof, corrigated metal siding

8-4 1/2" 9-9 1/4" 1 hour rated floor ceilng assembly

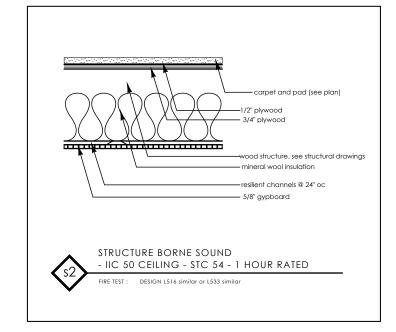

general notes

1. see A3.1 for typical section conditions.

2. see A4.1 for typical framing conditions.

— backfill with permeable soils

provide 4" rigid footing drain, both sides of the footing, cover with filter fabric and s crushed stone

undisturbed soil or clean, solid ledge

atlantic street apartments atlantic street portland maine

1/2" = 1' - 0"

transverse section 07 march 2005 revised: 12 Sept 05 A 3.2

. 1/2" = 1' - 0"

james sterling architect 142 high street portland, maine