
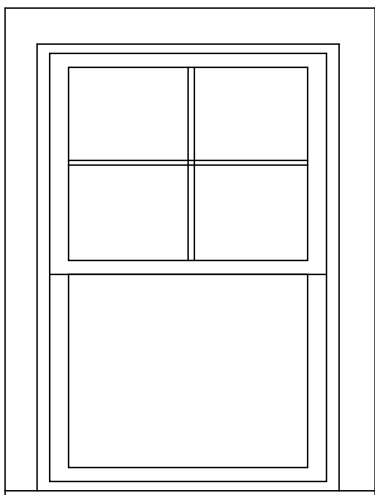



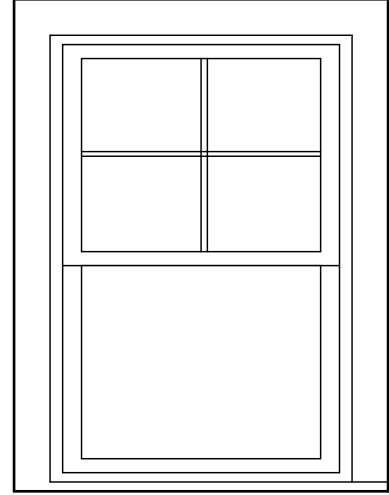


inside face of sidewalls: flash 18" above finish roof, corrugated metal siding

r38 min.
4 mil vb. typ.

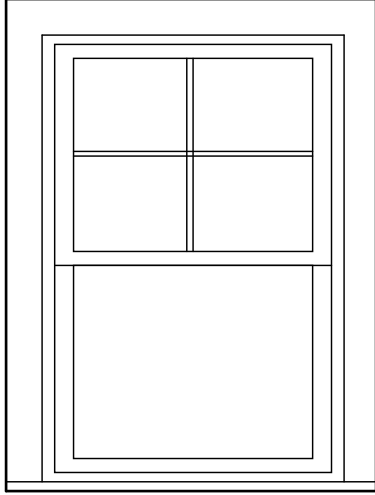

kitchen counters

kitchen counters

kitchen counters

batt insulation both sides

3'-8" min. clear

1 hour rated separation, both sides and under stair

water proof stair

6" batt insulation both sides

vapor barrier

closet

general notes

1. see A3.1 for typical section conditions.
2. see A4.1 for typical framing conditions.

backfill with permeable soils

provide 4" rigid footing drain, both sides of the footing, cover with filter fabric and crushed stone

undisturbed soil or clean, solid ledge

atlantic street apartments
atlantic street
portland maine

transverse section
07 march 2005 **A 3.2**
1/2" = 1' - 0"

james sterling architect
142 high street
portland, maine