




Install Date: 8/12/15
 75 Washington Ave
 75 Washington Ave
 Portland, ME 04101
 Cintas Fire Protection
 603-717-7300

Cintas Fire Protection
 3 Tallwood Drive
 Bow, NH 03304
 John Quinn
 603-717-7300
 quinnj@cintas.com
 4982

75 Washington Ave
 75 Washington Ave

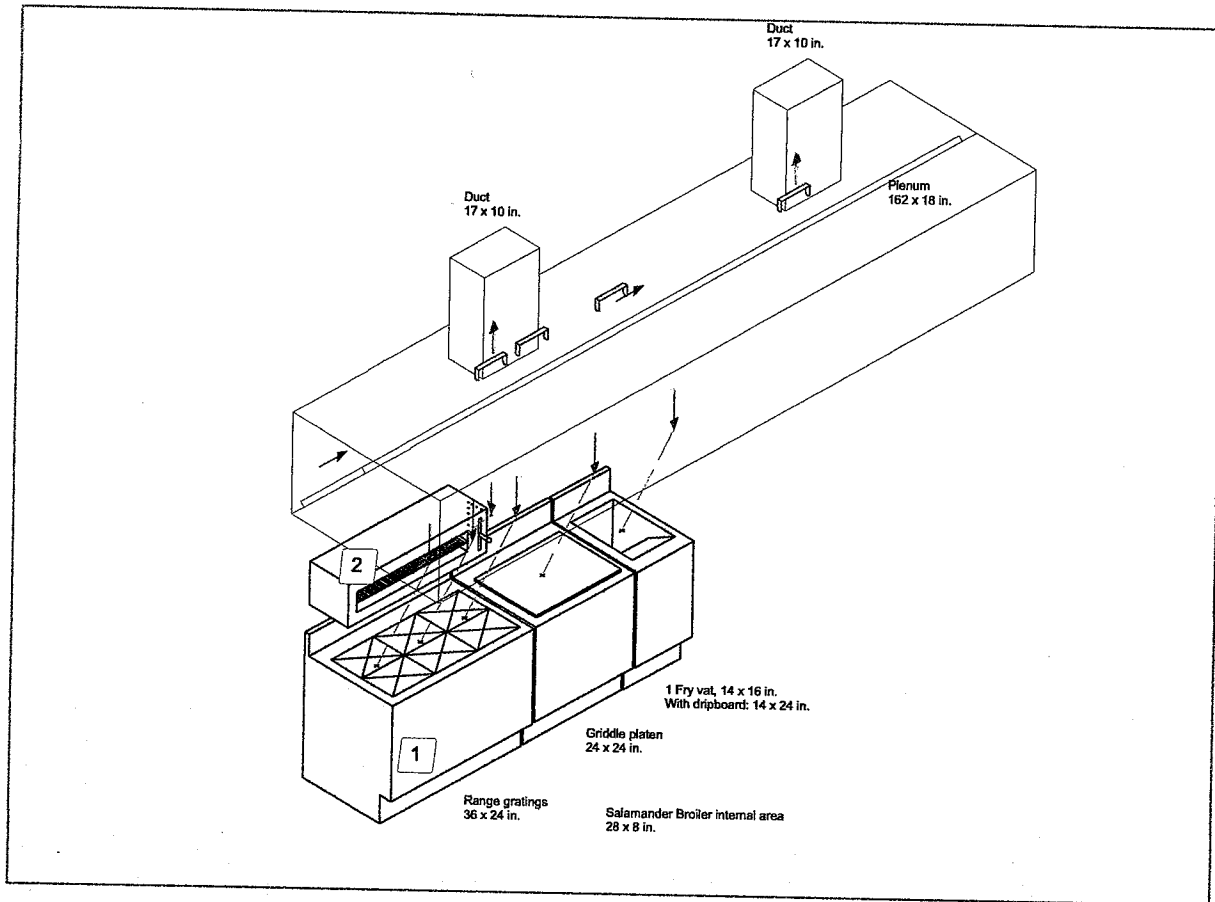

Flow Summary:

Coverage	Overall Dimensions	Nozzle	Flows	Nozzle Location
Hood: Single Bank	162 x 54 in.	1N x2	2	2-4 in. from filter face, center of height dimension, aimed down filter length.
Duct: Square	17 x 10 in.	2W	2	2-8 in. into center of duct opening, aimed up
Duct: Square	17 x 10 in.	2W	2	2-8 in. into center of duct opening, aimed up
Range: 6 burners	36 x 24 in.	1F x3	3	40-48 in., front edge of burner, nozzle flats parallel with burner front-to-rea ... See Note 1
	36 x 12 in.	1N	1	Directly in line with either vertical edge of broiler opening, 6-12 in. in fron ... See Note 2
Griddle	24 x 24 in.	1N	1	35-40 in., 0-2 in. inside perimeter, aimed at center
Fryer: 1 vat, dripboard	16 x 24 in.	3N	3	25-35 in., FRONT HALF of perimeter, aimed at center
Total Flow Points			14	