

**GIRDER TRUSS "T1" ELEVATION**

1/4"=1'-0"

**NOTES:**



1. ALL LOADS SHALL BE DETERMINED UTILIZING A TRIBUTARY WIDTH OF 6'-0".
2. TRUSS SHALL BE 3 PLY OR 4 1/2" MIN WIDTH.
3. TIEDOWN PRODUCT SUBJECT TO CHANGE PENDING TRUSS DESIGN SUBMITTAL. CONFIRM WITH TRUSS MANUF.

**ROOF TRUSS DESIGN LOADS**

THE FOLLOWING DESIGN LOADS SHALL BE USED FOR THE DESIGN OF THE TRUSSES, UNLESS NOTED OTHERWISE.

- TOP CHORD DEAD LOAD.....10 PSF
- TOP CHORD SNOW LOAD.....46 PSF
- TOP CHORD SNOW LOAD.....60 PSF (MAX UNBALANCED)
- BOT CHORD DEAD LOAD.....10 PSF

SEE FRAMING PLANS & ARCHITECTURAL DWGS FOR ADDITIONAL INFORMATION.

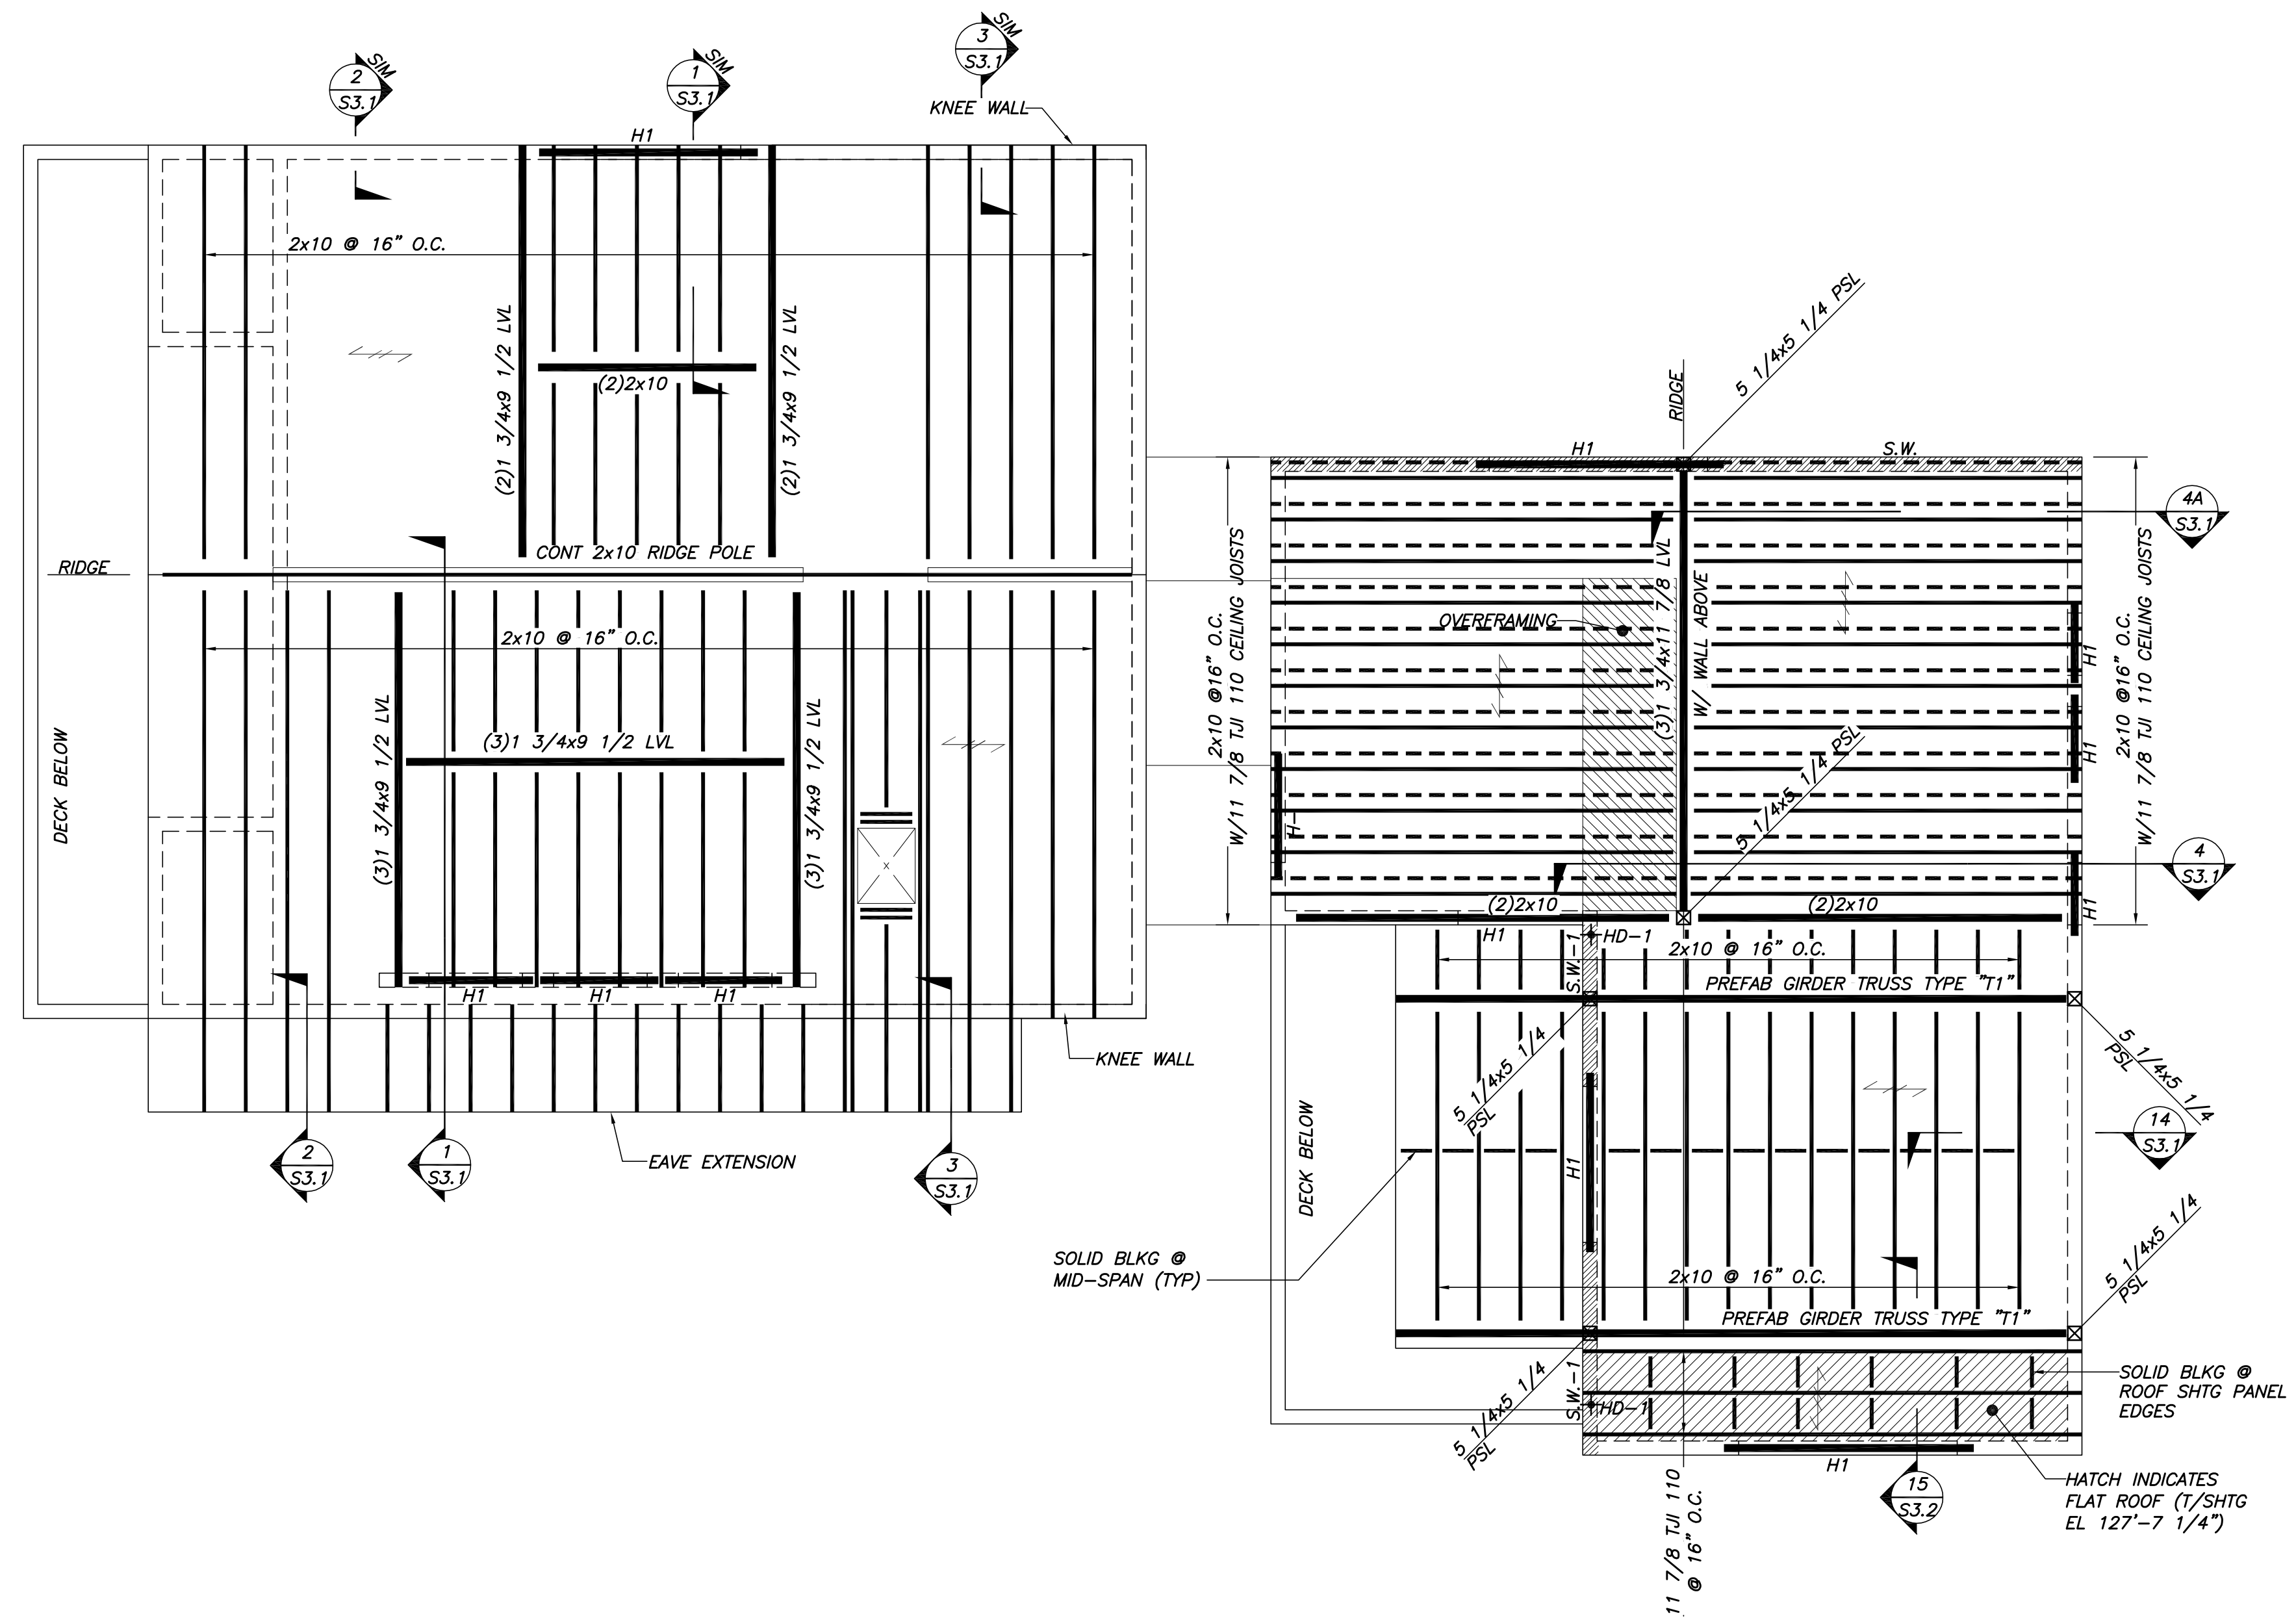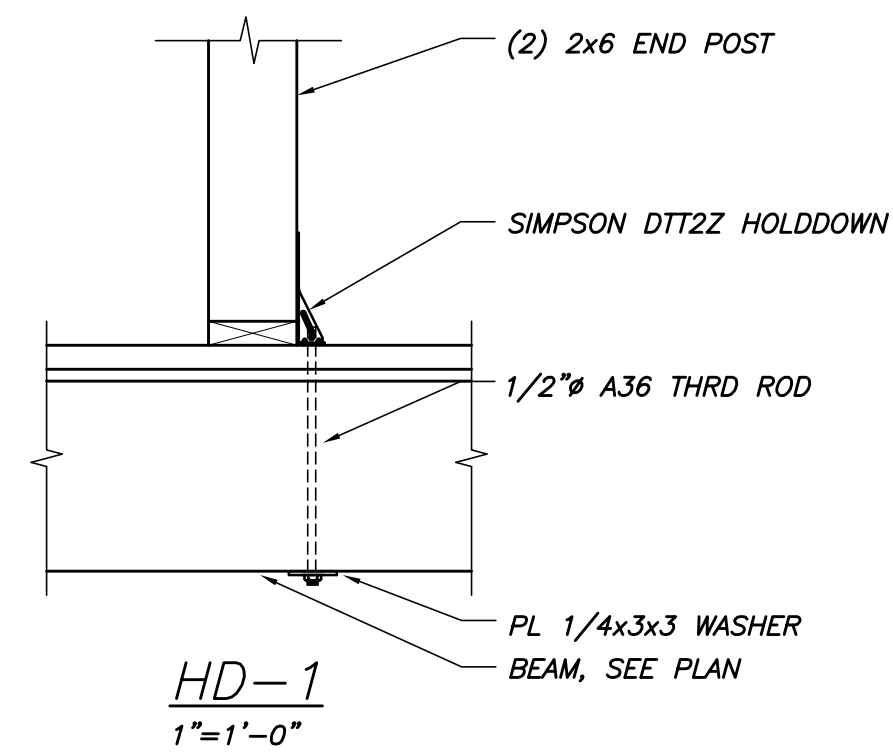

**ROOF FRAMING PLAN**

1/4"=1'-0"

**NOTES:**

1. INDICATES SPAN DIRECTION OF 5/8" ROOF SHEATHING.
2. INDICATES HEADER LOCATION. SEE SCHEDULE ON S1.3.
3. INDICATES SHEARWALL LOCATION. SEE SCHEDULE ON S1.3.
4. INDICATES SHEARWALL HOLDDOWN. SEE DETAIL THIS SHEET.

Approved For	
Issued For	PERMIT APPLICATION - NOT FOR CONSTRUCTION
Date	07/02/12
Rev No	

TOWN HOUSE A & B  
9 & 11 LAWRENCE STREET  
ROOF FRAMING

Designed	NRM	Scale	NOTED
Drawn	MSK	Date	07/02/12
Checked	NRM	Becker Job Number	2813

S1.5