

**THIRD LEVEL FRAMING PLAN**  
 SCALE: 1/4"=1'-0"  
 NOTES:  
 1. SEE S1.0 FOR GENERAL STRUCTURAL NOTES.  
 2. ALL FLOOR SHEATHING SHALL BE 3/4" OSB, SEE GENERAL NOTES FOR ADDITIONAL INFO.  
 3. ROOF SHEATHING SHALL BE 5/8" OSB, SEE GENERAL NOTES FOR ADDITIONAL INFO.  
 4. ALL WOOD COLUMNS IN 2x6 WALLS SHALL BE 3-2x6 AND IN 2x4 WALLS SHALL BE (3) 2x4, UNO.  
 5. ALL WOOD BEAMS ARE FLUSH, UNO.  
 6. ALL HEADERS ARE (2) 2x8, UNO.  
 7. NEW 2x BLOCKING BETWEEN JOISTS WHERE BEARING WALL ABOVE.

**FRAMING PLAN SYMBOLS KEY**

□	WOOD POST
○	STEEL COLUMN
⊗	NUMBER OF WOOD STUDS IN POST BELOW
A	COLUMN ABOVE THIS LEVEL
C	COLUMN CONTINUOUS THROUGH THIS LEVEL
—	JOIST BEARING
—	CONTINUOUS JOIST WITH INTERMEDIATE BEARING
—	FLUSH FRAMED JOIST BEARING WITH HANGER
—	WOOD STUD BEARING WALL BELOW
—	SHEAR WALL
2x4	NUMBER OF TRIM STUDS UNDER HEADER
2x4	NUMBER OF KING STUDS ADJACENT TO HEADER



2  
11/26/13

**Structural Integrity**  
 Consulting Engineers, Inc.  
 77 Oak Street  
 Portland, ME, 04101  
 p. 207-774-4614  
 f. 866-793-7835  
 www.structuralintg.com  
 BUILD WITH CONFIDENCE  
 © 2012 Structural Integrity Consulting Engineers, Inc.


© 2013 RYAN SENATORE ARCHITECTURE

**RENOVATIONS TO**  
**135 CONGRESS STREET**  
 PORTLAND, MAINE

**RSA**

**RYAN SENATORE ARCHITECTURE**  
 565 CONGRESS STREET, STE. 304  
 PORTLAND, MAINE 04101  
 207-650-6414  
 senatorearchitecture.com

CONSULTANTS:  
 STRUCTURAL: Structural Integrity  
 77 Oak Street  
 Portland, ME 04101  
 207-774-4614

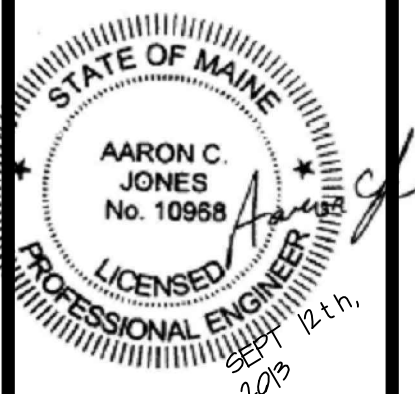

REVISIONS:  
 REV. 1: 10-18-13

DATE: 12 SEPTEMBER 2013  
 PROJECT No.  
 DRAWN BY: MKL  
 CHECKED BY: ACJ  
 SCALE: AS NOTED

SHEET TITLE:  
 THIRD FLOOR FRAMING PLAN

**S1-4**