



GENERAL NOTES:

- THESE DRAWINGS ARE DIAGRAMMATIC. REFER TO THE ARCHITECTURAL DRAWINGS FOR EXACT DIMENSIONS.
- INSTALLATION SHALL COMPLY WITH NEC, NFPA 72 AND ALL OTHER APPLICABLE CODES AS REQUIRED BY THE LOCAL AUTHORITY HAVING JURISDICTION.
- WIRING DEPICTED ON THESE PLANS IS SCHEMATIC - ACTUAL WIRE LOCATIONS MAY DIFFER FROM THESE PLANS. WIRING SHALL BE PERFORMED AS ACTUAL BUILDING CONSTRUCTION CONDITIONS ALLOW AND TO MINIMIZE PENETRATIONS THROUGH SEPARATION WALLS AND FIRE WALLS. THE USE OF RACEWAY IS PERMITTED AS LONG AS NO 110V OR HIGHER VOLTAGE CABLES ARE IN THE SAME RACEWAY.
- FIRE RATINGS SHALL BE MAINTAINED FOR ALL PENETRATIONS THROUGH FIRE-RATED CONSTRUCTION.
- POWER FOR ALL FIRE ALARM PANELS AND FIRE ALARM POWER SUPPLIES MUST BE PROVIDED BY A DEDICATED AC BRANCH CIRCUIT.
- POWER-LIMITED AND NONPOWER-LIMITED CIRCUIT WIRING MUST REMAIN SEPARATED IN CABINET. ALL POWER-LIMITED CIRCUIT WIRING MUST REMAIN AT LEAST 25" AWAY FROM ANY NONPOWER-LIMITED CIRCUIT WIRING. FURTHERMORE, ALL POWER-LIMITED AND NONPOWER-LIMITED CIRCUIT WIRING MUST ENTER AND EXIT THE CABINET THROUGH DIFFERENT KNOCK OUTS AND/OR SEPARATE CONDUITS.
- WHEN UTILIZING CLASS "A" CIRCUITS, SEPARATE OUTGOING AND RETURN CONDUCTORS OF CLASS "A" CIRCUITS BY A MINIMUM OF 12" WHERE RUN VERTICALLY AND 48" WHERE RUN HORIZONTALLY.
- WHEN UTILIZING SHIELDED CABLE TIE SHIELDS THROUGH AND INSULATE AT EACH JUNCTION BOX. INSULATE AND TAPE BACK AT END.
- ALL FIRE ALARM CABLING SHALL BE ACCEPTABLE TO THE FIRE ALARM EQUIPMENT MANUFACTURER FOR THE INTENDED PURPOSE.
- SMOKE DETECTORS SHALL NOT BE INSTALLED UNTIL AFTER CONSTRUCTION CLEAN-UP IS COMPLETED AND FINAL.
- LOCATE SMOKE DETECTORS A MINIMUM OF THREE (3) FEET FROM MECHANICAL DIFFUSERS, WALL-MOUNTED SMOKE DETECTORS SHALL BE LOCATED A MINIMUM OF 4" AND A MAXIMUM OF 12" FROM CEILING. CEILING-MOUNTED SMOKE DETECTORS SHALL BE MOUNTED ON CEILINGS AND NOT ON THE BOTTOMS OF BEAMS OR JOISTS.
- PROVIDE SYNCHRONIZATION OF ALL VISUAL NOTIFICATION APPLIANCE CIRCUITS. PROVIDE ALL REQUIRED SYNC MODULES. PROVIDE A MULTI-SYNC MODE SLAVE CONNECTION BETWEEN ALL SYNC MODULES.
- VERIFY ALL FIELD SELECTABLE AUDIBILITY SETTINGS OF NOTIFICATION APPLIANCES WITH FIRE ALARM CONTRACTOR.
- UPON COMPLETION OF THE FIRE ALARM SYSTEM INSTALLATION AND PROGRAMMING, THE INSTALLING CONTRACTOR SHALL PERFORM FINAL TESTING OF THE ENTIRE SYSTEM PER ALL APPLICABLE CODES, AND SHALL COORDINATE AND PERFORM A FINAL FIRE ALARM SYSTEM INSPECTION.
- PROVIDE OFF-SITE MONITORING AS REQUIRED BY THE INTERNATIONAL FIRE CODE, SECTION 907.15 AND THE LOCAL AUTHORITY HAVING JURISDICTION.
- INSTALLING CONTRACTOR SHALL PHYSICALLY LABEL ALL INITIATING DEVICES AND NOTIFICATION APPLIANCE CIRCUIT END OF LINE (WHEN WIRING CLASS "B"). THESE LABELS SHALL BE IN PLACE PRIOR TO START-UP AND TESTING.

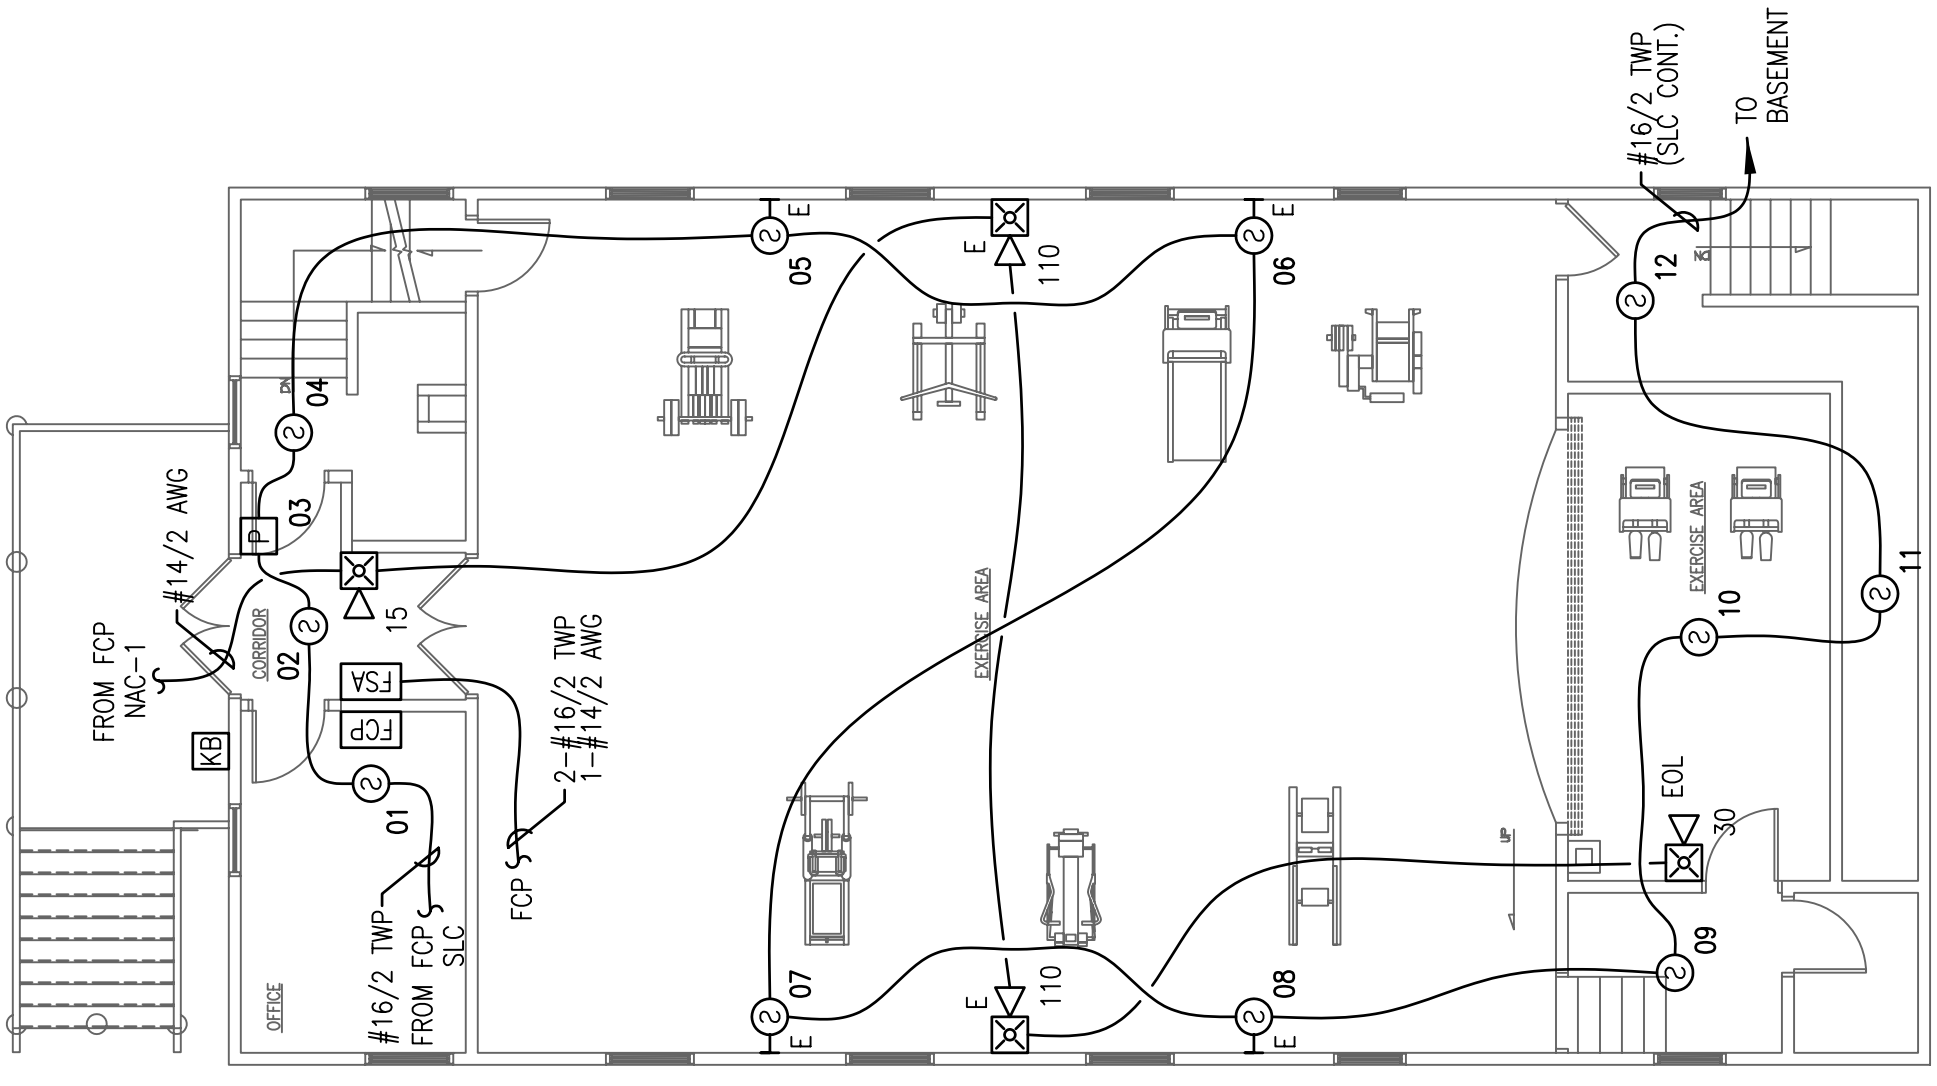


FIRST FLOOR FIRE ALARM PLAN

SCALE: 1/8"=1'-0"

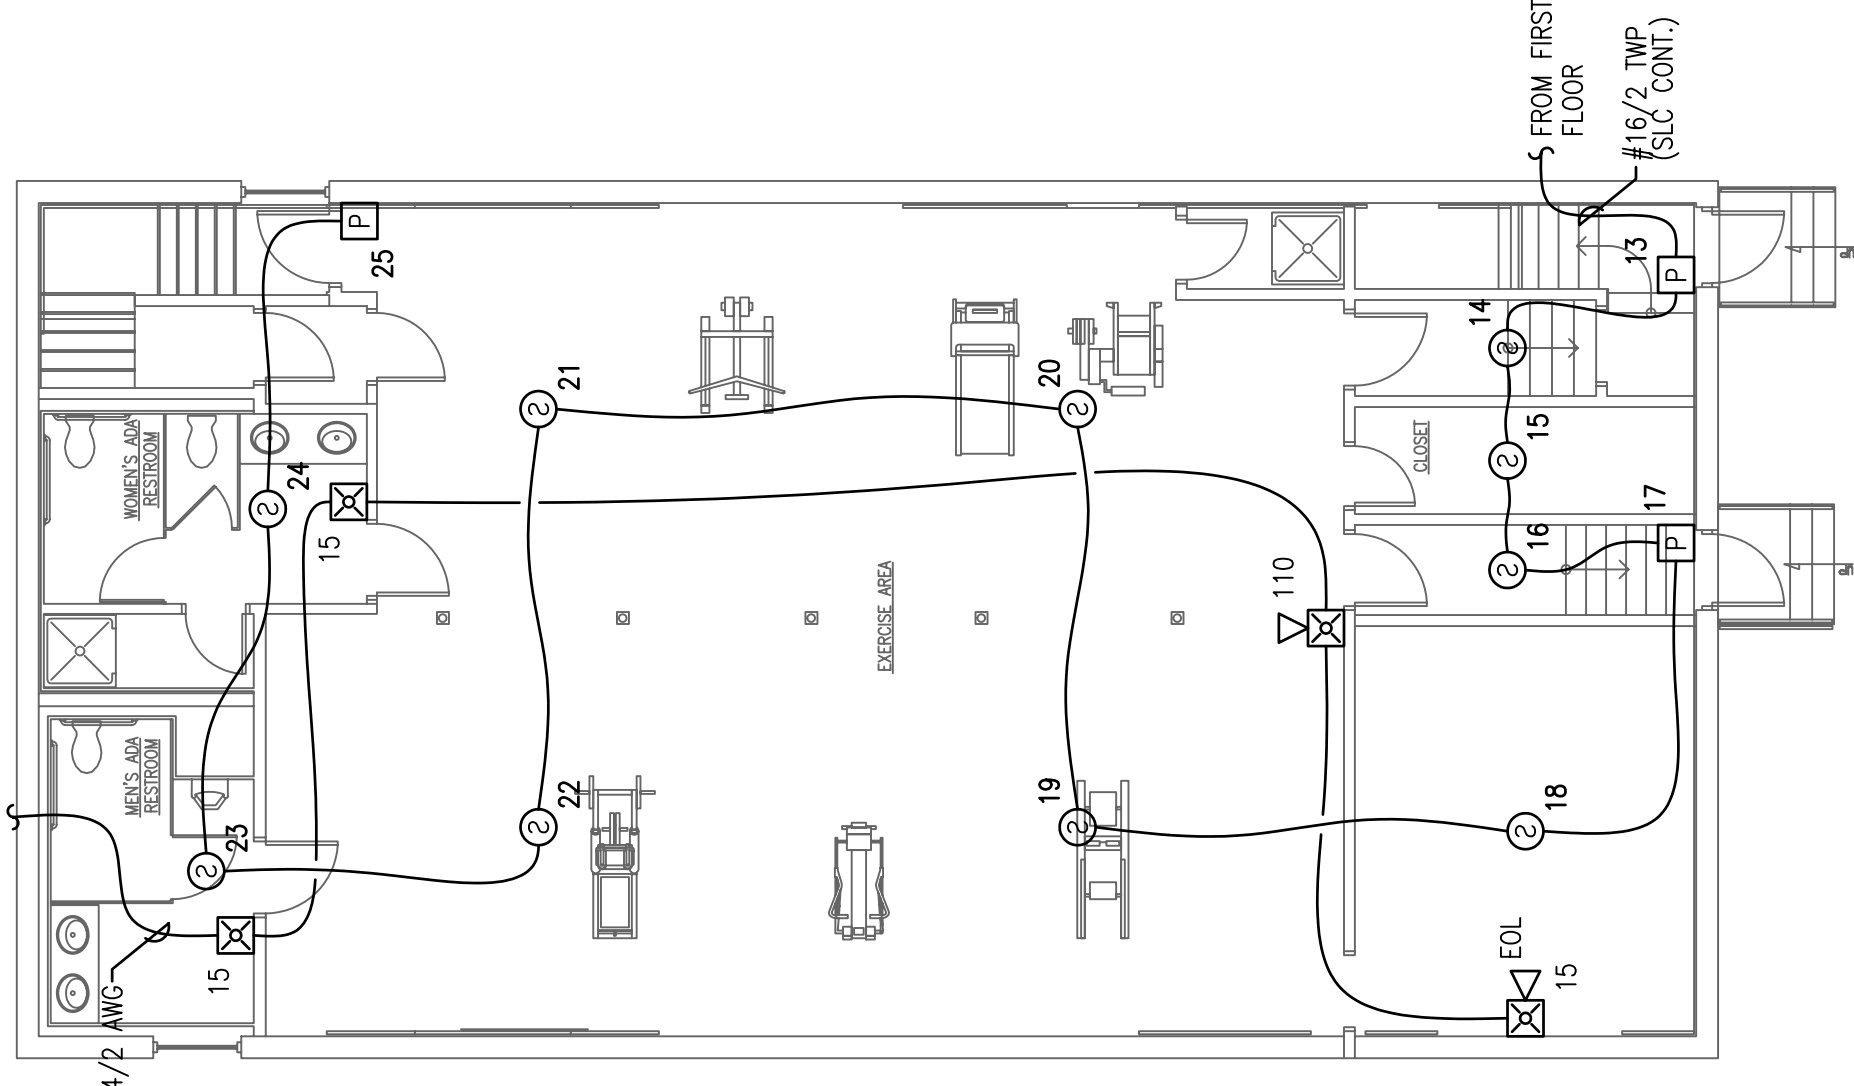

BASEMENT FIRE ALARM PLAN

SCALE: 1/8"=1'-0"

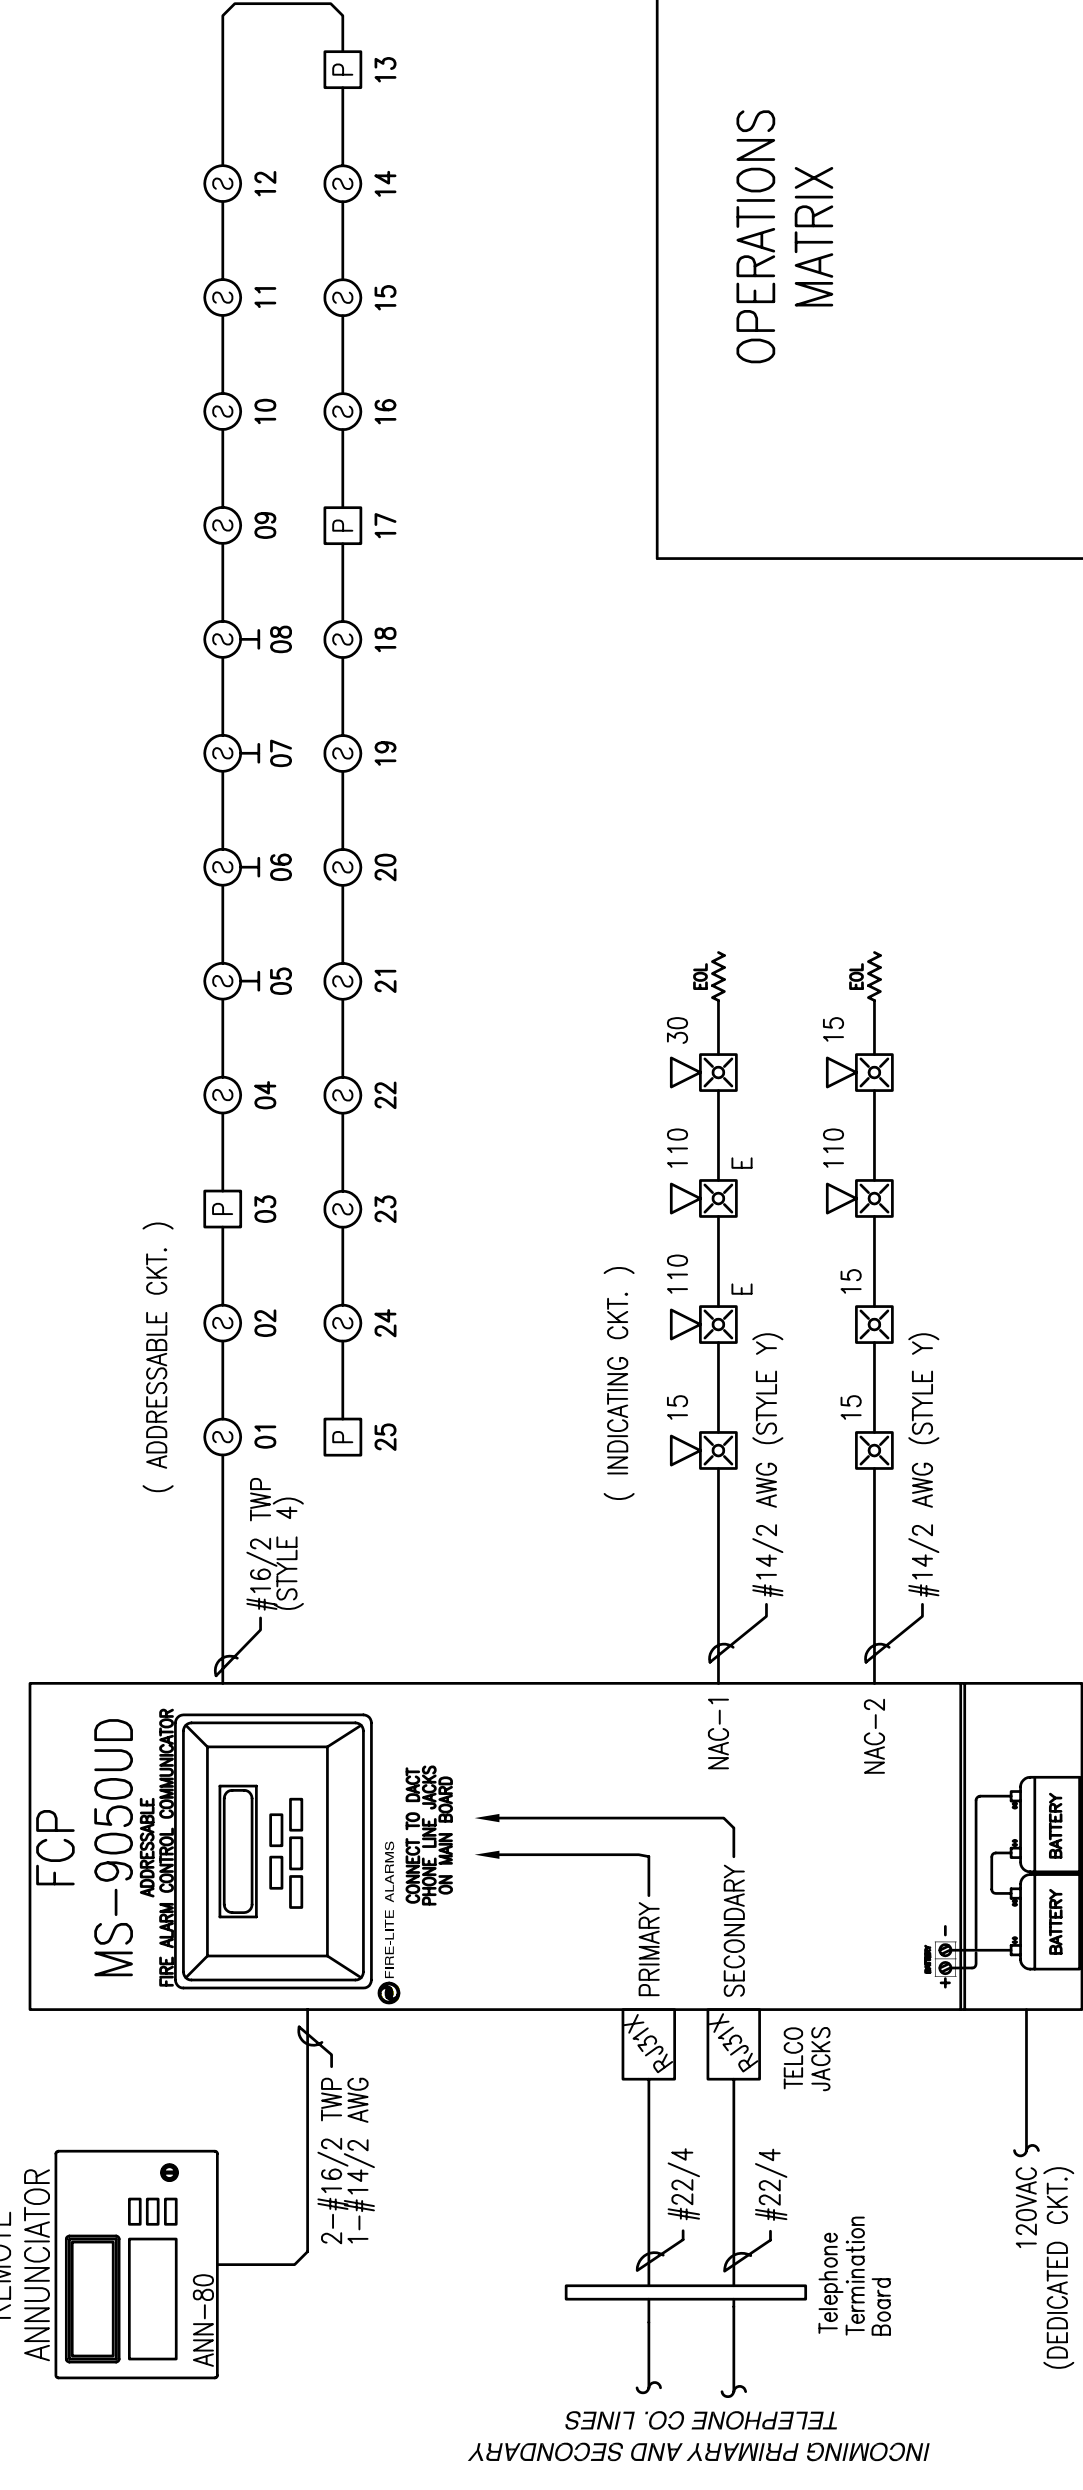

FIRE ALARM RISER DIAGRAM

SCHEMATIC: NO SCALE

OPERATIONS MATRIX	
FIRE ALARM INPUT	ACTIVATE ALARM INDICATOR
SMOKE DETECTORS	ACTIVATE AUDIBLE ALARM
PULL STATIONS	ACTIVATE TROUBLE INDICATOR
FIRE ALARM AC POWER FAIL	ACTIVATE AUDIBLE TROUBLE SIGNAL
FIRE ALARM LOW BATTERY	ACTIVATE TROUBLE SIGNAL
OPEN CIRCUIT	TRANSMIT TROUBLE SIGNAL
GROUND FAULT	
NAC SHORT CIRCUIT	
LOSS OF AC TO BUILDING	

FCP Battery Calculation

PROJECT NAME: 1854 FOREST AVENUE
 Required Standby Time: 24 Hours
 Required Alarm Time: 5 Minutes

Device Type	Number of Devices	Current (Amps)	Total Current (Amps)
MS-9050UD Main Circuit Board	1	X 0.120000	= 0.120000
ANN-80 Remote Annunciator	1	X 0.015000	= 0.015000
SD350 Smoke Detector	21	X 0.006000	= 0.126000
BS-12LX Full Stations	4	X 0.006250	= 0.025000
TOTAL STANDBY LOAD			0.142224


Device Type	Number of Devices	Current (Amps)	Total Current (Amps)
MS-9050UD Main Circuit Board	1	X 0.200000	= 0.200000
ANN-80 Remote Annunciator	1	X 0.040000	= 0.040000
All Addressable Devices - Maximum Draw	1	X 0.400000	= 0.400000
NAC-1	1	X 0.610000	= 0.610000
NAC-2	1	X 0.423000	= 0.423000
TOTAL ALARM LOAD			1.673000

Battery Requirements	
Standby Load	Required Standby Time in Hours
Current (Amps)	24.000000 = 3.41328
Alarm Load	Required Alarm Time in Hours
Current (Amps)	1.673000 X 0.083333 = 0.13942
Total Ampere Hours (before derating factor)	3.55270
Derating Factor	X 1.2
TOTAL AMPERE HOURS REQUIRED	4.26324

BATTERIES TO BE PROVIDED (2 - 12V)

FIRE ALARM SYMBOL LEGEND

SYMBOL	DESCRIPTION	MOUNTING
FCP	FIRE ALARM CONTROL PANEL	WALL-TOP @ 66"
FPS	FIRE ALARM POWER SUPPLY	FIELD VERIFY
FSA	FIRE SYSTEM ANNUNCIATOR	WALL-TOP @ 66"
FSD	FIRE/SMOKE DAMPER	BY OTHERS
SD	SMOKE DETECTOR	CEILING
SDCT	DUCT SMOKE DETECTOR	BY OTHERS
HEAT	HEAT DETECTOR	CEILING
AM	ADDRESSABLE CONTROL MODULE	FIELD VERIFY
MM	ADDRESSABLE MONITOR MODULE	FIELD VERIFY
P	MANUAL PULL STATION	WALL @ 48"
ER	CONTROL RELAY (MULTI-VOLTAGE)	FIELD VERIFY
RM	ADDRESSABLE RELAY MODULE	FIELD VERIFY
MD	MAGNETIC DOOR HOLDER	FIELD VERIFY
WF	WATER FLOW SWITCH	BY OTHERS
VT	VALVE TAMPER SWITCH	BY OTHERS
B	BELL	BY OTHERS
CS	CEILING MOUNT STROBE	FIELD VERIFY
CH	CEILING MOUNT HORN / STROBE	FIELD VERIFY
CSH	CEILING MOUNT SPEAKER / STROBE	FIELD VERIFY
H	HORN	WALL @ 10'-0"
HS	HORN / STROBE	WALL 80"-96"
SS	SPEAKER / STROBE	WALL 80"-96"
SP	SPEAKER	WALL @ 90"
STR	STROBE	WALL 80"-96"
KB	KNOX BOX	FIELD VERIFY

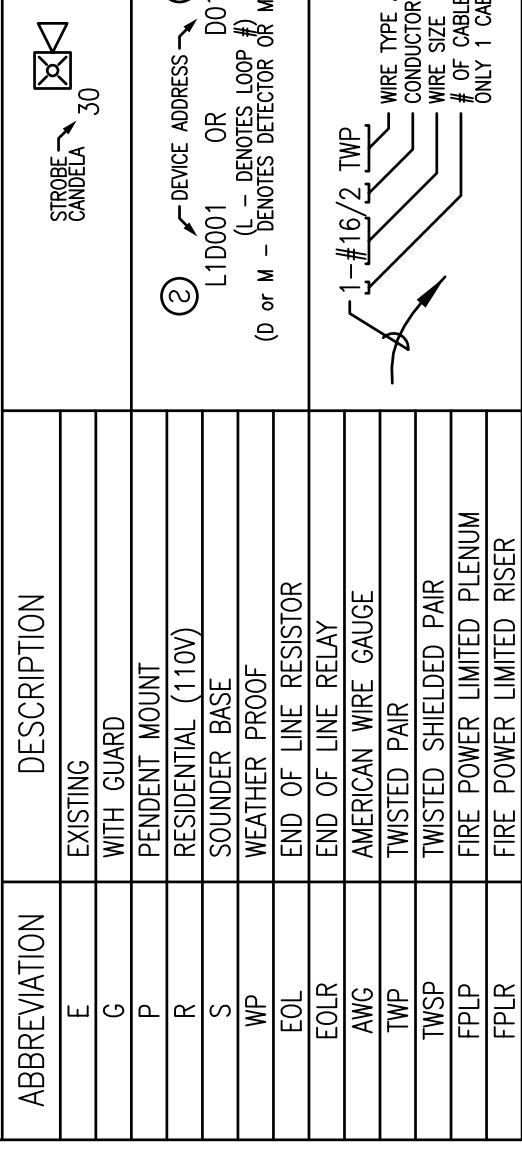

**1854 FOREST AVENUE
 PORTLAND, ME 04103
 FIRE ALARM PLAN**

Project Name: 1854 FOREST AVENUE
 Circuit Number: NAC-1

Device	Current	Distance previous device	Voltage at device	Drop from source	Percent Drop	Resistance Per 1000
Device 1	0.079	43	20.37	0.03	0%	6.14
Device 2	0.212	36	20.23	0.17	1%	6.14
Device 3	0.212	36	20.16	0.24	1%	6.14
Device 4	0.107	37	20.14	0.26	1%	6.14
Totals	0.610	124				

Max Output Current: 1.0 amps
 Total Circuit Current: 0.610 amps

Project Name: 1854 FOREST AVENUE
 Circuit Number: NAC-2

Device	Current	Distance previous device	Voltage at device	Drop from source	Percent Drop	Resistance Per 1000
Device 1	0.066	24	20.34	0.06	0%	6.14
Device 2	0.066	24	20.29	0.11	1%	6.14
Device 3	0.212	47	20.20	0.20	1%	6.14
Device 4	0.079	26	20.19	0.21	1%	6.14
Totals	0.423	120				

Max Output Current: 1.0 amps
 Total Circuit Current: 0.423 amps