


FIRE ALARM PLAN
SCALE: 1/8"=1'-0"

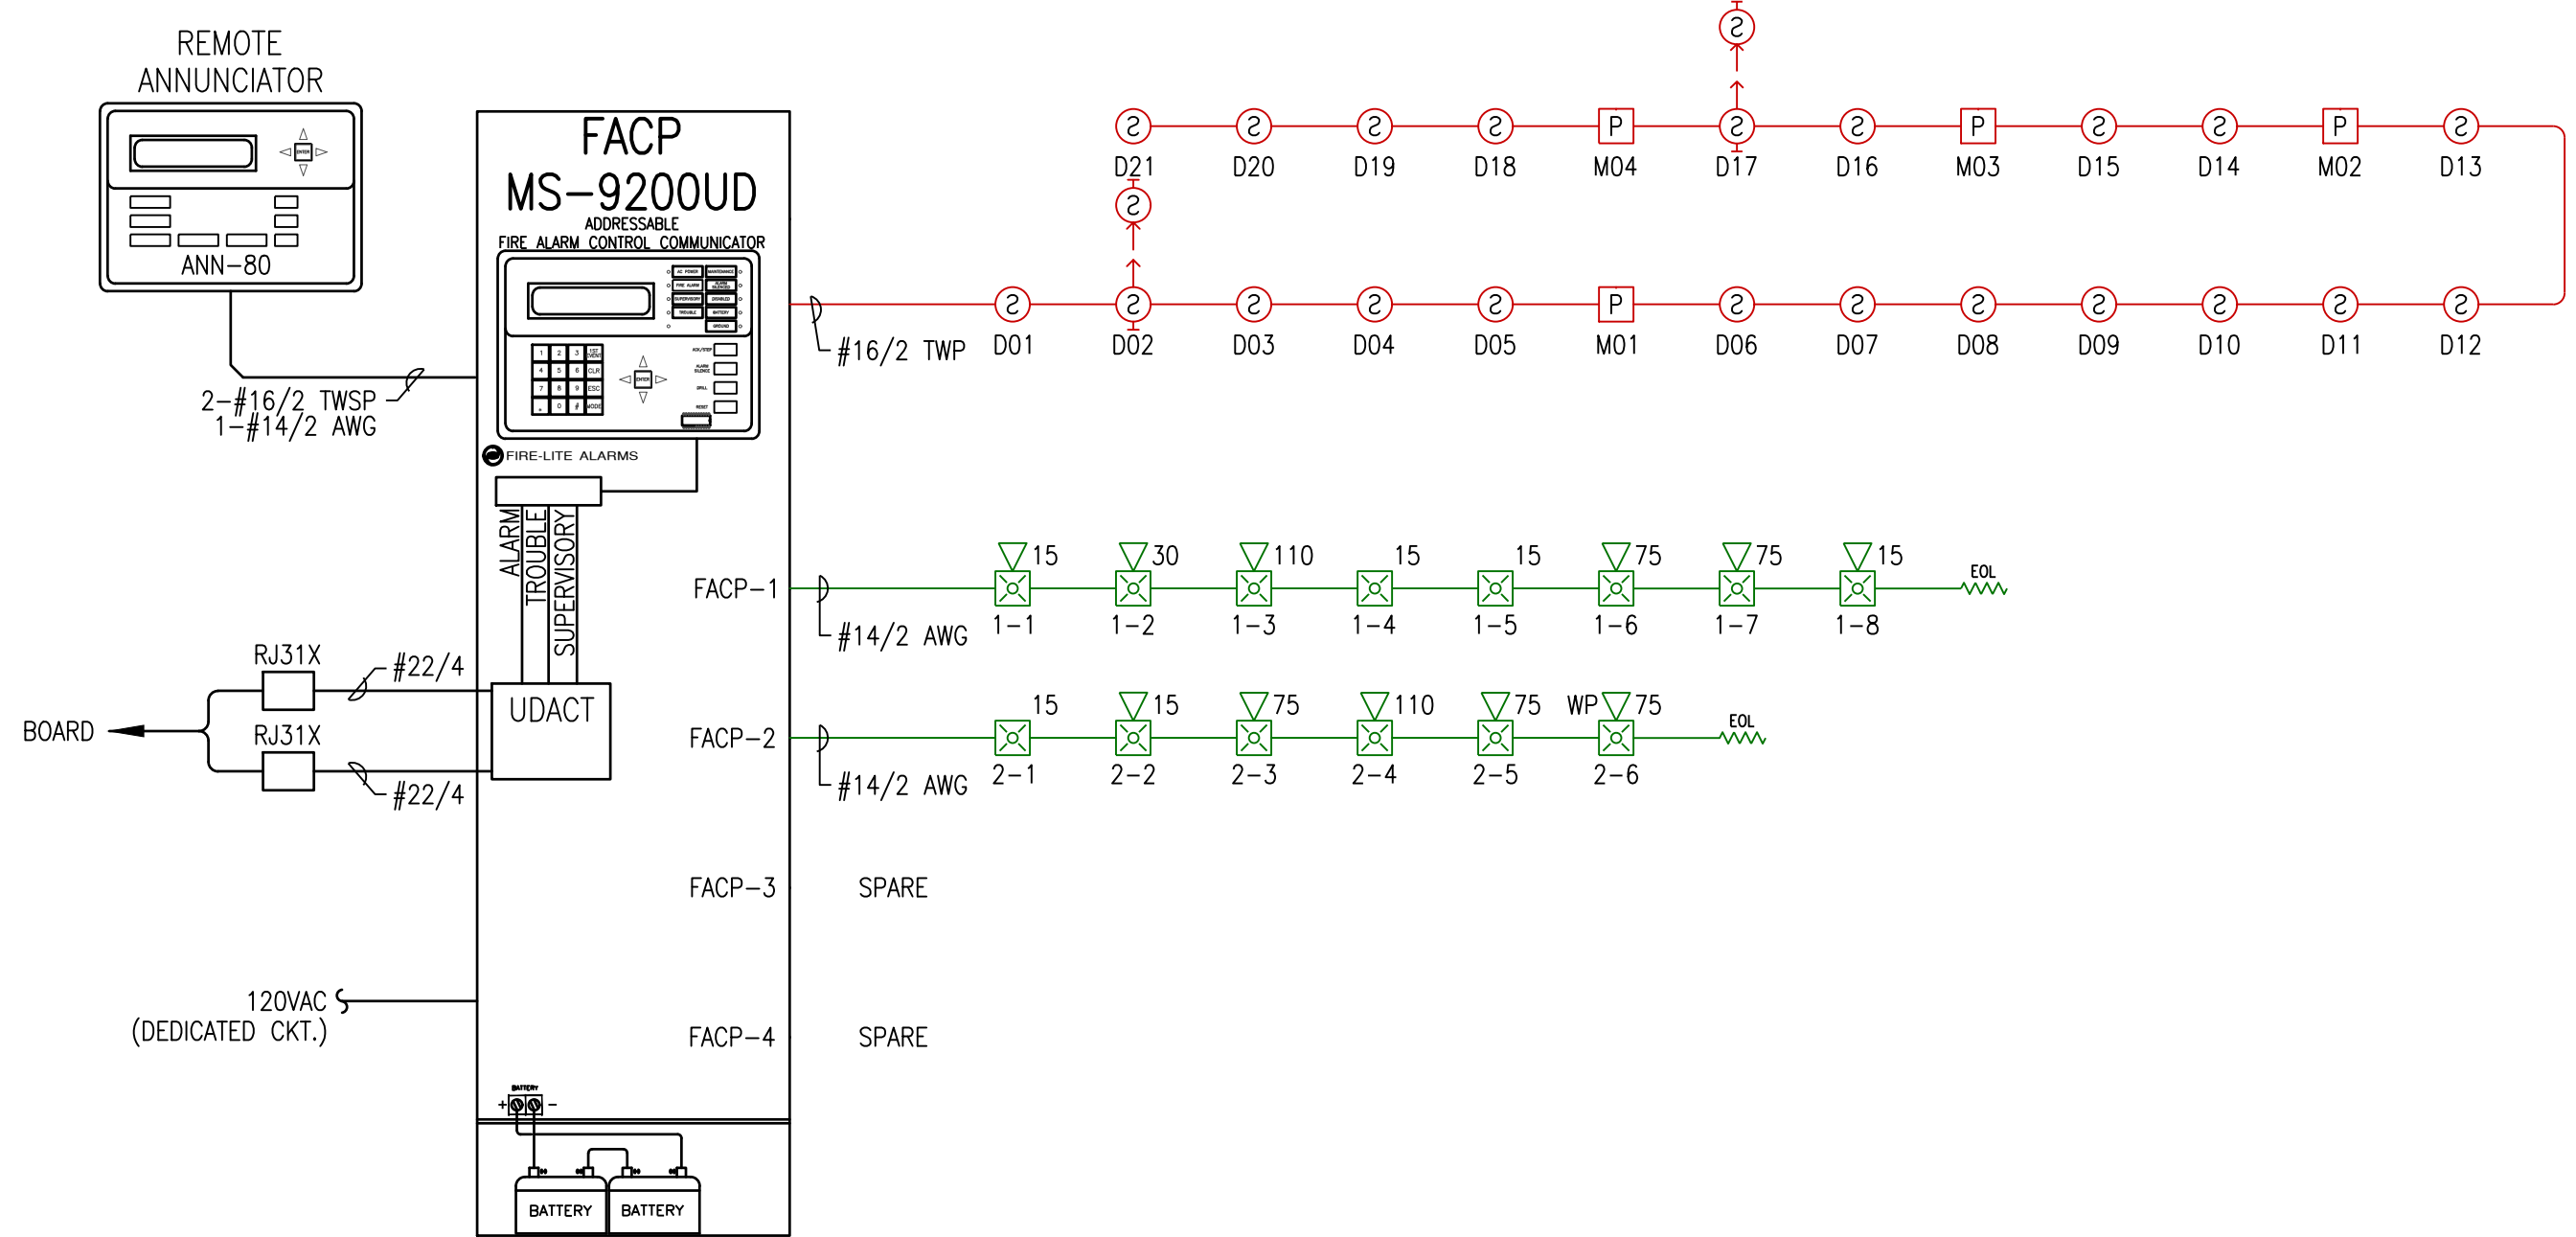

FIRE ALARM RISER DIAGRAM
SCHEMATIC: NO SCALE

FACP Battery Calculation

5/26/2017

PROJECT NAME: CANON
Required Standby Time: 24 Hours
Required Alarm Time: 5 Minutes

AC Branch Current: _____ Amps @ 120V

Regulated Load in Standby				
Device Type	Number of Devices	Current (Amps)		Total Current (Amps)
FACP MAINBOARD	1	0.14500	=	0.14500
SMOKE DETECTOR	19	0.00030	=	0.00570
BEAM DETECTOR	2	0.00200	=	0.00400
PULL STATION	4	0.00030	=	0.00120
ANNUNCIATOR	0	0.01500	=	0.00000
TOTAL STANDBY LOAD				0.15590

Regulated Load in ALARM				
Device Type	Number of Devices	Current (Amps)		Total Current (Amps)
FACP MAINBOARD	1	0.27500	=	0.27500
MAX INITIATING DEVICE CURRENT DRAW	1	0.40000	=	0.40000
ANNUNCIATOR	0	0.04000	=	0.00000
FACP-1 (See Voltage Drop Calculations)	1	0.67200	=	0.67200
FACP-2 (See Voltage Drop Calculations)	1	0.67700	=	0.67700
FACP-3 (See Voltage Drop Calculations)	1	0.00000	=	0.00000
FACP-4 (See Voltage Drop Calculations)	1	0.00000	=	0.00000
TOTAL ALARM LOAD				2.02400

Battery Requirements			
Standby Load Current (Amps)	0.15590	Required Standby Time in Hours	24.00000
Alarm Load Current (Amps)	2.02400	Required Alarm Time in Hours	0.08333
Total Ampere Hours (before derating factor)			3.91027
Derating Factor			1.2
TOTAL AMPERE HOURS REQUIRED			4.69232

BATTERIES TO BE PROVIDED (2 - 12v) 7 AH

Point to Point NAC Voltage Drop Calculation

5/26/2017

Project Name: CANON
Circuit Number: FACP-1

Nominal System Voltage	20.4 volts	Wire Gauge	14	Resistance Per 1000	3.07
Minimum Device Voltage	16.0 volts	Gauge	14		3.07
Distance from source to 1st device	30 feet				
Wire Gauge for balance of circuit					

Max Output Current	3.00 amps
Total Circuit Current	0.672 amps
End of Line Voltage	19.89 volts

Circuit is within limits

Device	Current	Distance previous device	Voltage at Device	Drop from source	Percent Drop
Device 1	0.054	30	20.28	0.124	0.61%
Device 2	0.074	30	20.16	0.238	1.16%
Device 3	0.162	30	20.06	0.338	1.66%
Device 4	0.043	20	20.02	0.385	1.89%
Device 5	0.043	15	19.98	0.416	2.04%
Device 6	0.121	35	19.92	0.480	2.35%
Device 7	0.121	20	19.90	0.501	2.46%
Device 8	0.054	20	19.89	0.508	2.49%
Totals	0.672	200			

Notes: Wire resistance is doubled in the calculations for two wires (Positive and Negative). The voltage calculated to the last device must not be lower than the manufacturers listed minimum operating voltage (IE: rated operating voltage 16-33 VDC (24 VDC nominal)).

Point to Point NAC Voltage Drop Calculation

5/26/2017

Project Name: CANON
Circuit Number: FACP-2

Nominal System Voltage	20.4 volts	Wire Gauge	14	Resistance Per 1000	3.07
Minimum Device Voltage	16.0 volts	Gauge	14		3.07
Distance from source to 1st device	60 feet				
Wire Gauge for balance of circuit					

Max Output Current	3.00 amps
Total Circuit Current	0.677 amps
End of Line Voltage	19.79 volts

Circuit is within limits

Device	Current	Distance previous device	Voltage at Device	Drop from source	Percent Drop
Device 1	0.043	60	20.15	0.249	1.22%
Device 2	0.054	20	20.07	0.327	1.60%
Device 3	0.121	20	20.00	0.398	1.95%
Device 4	0.162	30	19.92	0.483	2.37%
Device 5	0.121	40	19.84	0.556	2.73%
Device 6	0.176	50	19.79	0.610	2.99%
Totals	0.677	220			

Notes: Wire resistance is doubled in the calculations for two wires (Positive and Negative). The voltage calculated to the last device must not be lower than the manufacturers listed minimum operating voltage (IE: rated operating voltage 16-33 VDC (24 VDC nominal)).

OPERATIONS MATRIX

	FIRE ALARM OUTPUT	ACTIVATE ALARM INDICATOR	ACTIVATE AUDIBLE ALARM	ACTIVATE SUPERVISORY INDICATOR	ACTIVATE AUDIBLE SUPERVISORY SIGNAL	ACTIVATE TROUBLE INDICATOR	ACTIVATE AUDIBLE TROUBLE INDICATOR	TRANSMIT ALARM SIGNAL	TRANSMIT SUPERVISORY SIGNAL	TRANSMIT TROUBLE SIGNAL	ACTIVATE NOTIFICATION APPLIANCES
FIRE ALARM INPUT											
SMOKE DETECTORS		●	●								●
PULL STATIONS			●	●							●
FIRE ALARM AC POWER FAIL					●	●					●
FIRE ALARM LOW BATTERY					●	●					●
OPEN CIRCUIT					●	●					●
GROUND FAULT					●	●					●
NAC SHORT CIRCUIT					●	●					●
LOSS OF AC TO BUILDING					●	●					●

- ### GENERAL NOTES:
- SCOPE OF WORK: THIS PROJECT SHALL INCLUDE THE INSTALLATION OF A NEW ADDRESSABLE FIRE ALARM SYSTEM WITH SMOKE DETECTION AND NOTIFICATION THROUGHOUT THE NON-SPRINKLERED BUILDING.
 - THESE DRAWINGS ARE DIAGRAMMATIC. REFER TO THE ARCHITECTURAL DRAWINGS FOR EXACT DIMENSIONS.
 - INSTALLATION SHALL COMPLY WITH NEC, NFPA 72 AND ALL OTHER APPLICABLE CODES AS REQUIRED BY THE LOCAL AUTHORITY HAVING JURISDICTION.
 - WIRING DEPICTED ON THESE PLANS IS SCHEMATIC - ACTUAL WIRE LOCATIONS MAY DIFFER FROM THESE PLANS. WIRING SHALL BE PERFORMED AS ACTUAL BUILDING CONSTRUCTION CONDITIONS ALLOW AND TO MINIMIZE PENETRATIONS THROUGH AREA SEPARATION WALLS AND FIRE WALLS. THE USE OF A RACEWAY IS PERMITTED AS LONG AS NO 110V OR HIGHER VOLTAGE CABLES ARE IN THE SAME RACEWAY.
 - FIRE RATINGS SHALL BE MAINTAINED FOR ALL PENETRATIONS THROUGH FIRE-RATED CONSTRUCTION.
 - POWER FOR ALL FIRE ALARM PANELS AND FIRE ALARM POWER SUPPLIES MUST BE PROVIDED BY A DEDICATED AC BRANCH CIRCUIT. THE LOCATION OF THE BRANCH CIRCUIT BREAKER SHALL BE PERMANENTLY IDENTIFIED AT THE CONTROL UNIT AND SHALL HAVE A RED MARKING IN ACCORDANCE WITH NFPA 72.
 - POWER-LIMITED AND NONPOWER-LIMITED CIRCUIT WIRING MUST REMAIN SEPARATED IN CABINET. ALL POWER-LIMITED CIRCUIT WIRING MUST REMAIN AT LEAST 0.25" AWAY FROM ANY NONPOWER-LIMITED CIRCUIT WIRING. FURTHERMORE, ALL POWER-LIMITED AND NONPOWER-LIMITED CIRCUIT WIRING MUST ENTER AND EXIT THE CABINET THROUGH DIFFERENT KNOCK OUTS AND/OR SEPARATE CONDUITS.
 - WHEN UTILIZING CLASS "A" CIRCUITS, SEPARATE OUTGOING AND RETURN CONDUCTORS OF CLASS "A" CIRCUITS BY A MINIMUM OF 12" WHERE RUN VERTICALLY AND 48" WHERE RUN HORIZONTALLY.
 - WHEN UTILIZING SHIELDED CABLE TIE SHIELDS THROUGH AND INSULATE AT EACH JUNCTION BOX. INSULATE AND TAPE BACK AT END.
 - ALL FIRE ALARM CABLING SHALL BE ACCEPTABLE TO THE FIRE ALARM EQUIPMENT MANUFACTURER FOR THE INTENDED PURPOSE.
 - SMOKE DETECTORS SHALL NOT BE INSTALLED UNTIL AFTER CONSTRUCTION CLEAN-UP IS COMPLETED AND FINAL.
 - LOCATE SMOKE DETECTORS A MINIMUM OF THREE (3) FEET FROM MECHANICAL DIFFUSERS. WALL-MOUNTED SMOKE DETECTORS SHALL BE LOCATED A MINIMUM OF 4" AND A MAXIMUM OF 12" FROM CEILING.
 - PROVIDE SYNCHRONIZATION OF ALL VISUAL NOTIFICATION APPLIANCE CIRCUITS. PROVIDE ALL REQUIRED SYNC MODULES. PROVIDE A MULTI-SYNC MODE SLAVE CONNECTION BETWEEN ALL SYNC MODULES.
 - VERIFY ALL FIELD SELECTABLE AUDIBILITY SETTINGS OF NOTIFICATION APPLIANCES WITH FIRE ALARM CONTRACTOR.
 - UPON COMPLETION OF THE FIRE ALARM SYSTEM INSTALLATION AND PROGRAMMING, THE INSTALLING CONTRACTOR SHALL PERFORM FINAL TESTING OF THE ENTIRE SYSTEM, PER ALL APPLICABLE CODES, AND SHALL COORDINATE AND PERFORM A FINAL FIRE ALARM SYSTEM INSPECTION.
 - PROVIDE OFF-SITE MONITORING AS REQUIRED BY THE INTERNATIONAL FIRE CODE, SECTION 907.6.5 AND THE LOCAL AUTHORITY HAVING JURISDICTION.
 - INSTALLING CONTRACTOR SHALL, PHYSICALLY, LABEL ALL INITIATING DEVICES AND NOTIFICATION APPLIANCE CIRCUIT END OF LINE (WHEN WIRING CLASS "B"). THESE LABELS SHALL BE IN PLACE PRIOR TO START-UP AND TESTING.

FIRE ALARM SYMBOL LEGEND

NOTE: ALL SYMBOLS MAY NOT BE USED ON THIS PROJECT

SYMBOL	DESCRIPTION	MOUNTING
FACP	FIRE ALARM CONTROL PANEL	WALL-TOP @ 66"
FSA	FIRE SYSTEM ANNUNCIATOR	WALL-TOP @ 66"
Ⓢ	SMOKE DETECTOR	CEILING
Ⓢ → Ⓢ	BEAM SMOKE DETECTOR	WALL @ 12" BELOW DECK
P	MANUAL PULL STATION	WALL @ 48"
KB	KEY BOX	BY OTHERS
WP	WEATHERPROOF HORN / STROBE	WALL @ 10'-0"
Ⓢ	HORN / STROBE	WALL 80"-96"
Ⓢ	STROBE	WALL 80"-96"

ABBREVIATION	DESCRIPTION
E	EXISTING
G	WITH GUARD
P	PENDANT MOUNT
R	RESIDENTIAL (110V)
S	SOUNDER BASE
WP	WEATHER PROOF
EOL	END OF LINE RESISTOR
EOLR	END OF LINE RELAY
AWG	AMERICAN WIRE GAUGE
TWP	TWISTED PAIR
TWSP	TWISTED SHIELDED PAIR
FPLP	FIRE POWER LIMITED PLENUM
FPLR	FIRE POWER LIMITED RISER
NAC	NOTIFICATION APPLIANCE CIRCUIT
SLC	SIGNALING LINE CIRCUIT

SPKAKER W/TAPE (W) 75 STROBE CANDELA (S) 30

Ⓢ - DEVICE ADDRESS - Ⓢ
L1D001 OR D01
(L - DENOTES LOOP #)
(D or M - DENOTES DETECTOR OR MODULE #)

1-#16/2 TWP
WIRE TYPE ABBREVIATED
CONDUCTOR COUNT
WIRE SIZE
OF CABLES (IF OMITTED
ONLY 1 CABLE NEEDED)

DATE	DESCRIPTION
5/26/2017	ISSUED FOR REVIEW & APPROVAL

CUNNINGHAM
Security Systems
10 Princes Point Road, Yarmouth, Maine 04096
Office: 207.846.3350 • Fax: 207.846.6080

CANON
1039 RIVERSIDE STREET
PORTLAND, ME 04103
FIRE ALARM PLAN

DRAWN	BRADY B. HAWS UNICAD JOB #17365
CHECKED	BRADY B. HAWS NICET III 138751
DATE	5/26/2017
REVISION	0
SCALE	1/8"=1'-0"

Shop drawings created by
5784 W. 4600 St.
Hampden, UT 84315
Office: 801.985.0410

UNICAD inc.
www.unicad.net Fire Alarm Design & Drafting Services

FA-1