



Typ. Roof Construction
 Top to bottom
 EPDM (fully adhered)
 5/8" Roof sheathing
 P.E. Trusses - See structural drawings for size and spacing
 Roof vent
 Dence pack cellulose insulation (R-60)
 3/4" Strapping
 1x6 Shiplap
 8" Drip Edge hold 1/2" off fascia typ.
 Gutter and soffit to be rapped in metal typ.

Parapet wall height 36". Railings @ 42" min.

Typ. Wall Construction
 Ext. to Int.
 1x6 horizontal t&g douglas fir
 James Hardie lapped siding various width exp. 4",6",8" T.W.
 Rain screen
 8 1/4" SIP (R-27)
 1/2" Gyp. Bd.

Window Flashing; Typ.
 Header per structural drawings
 Window per schedule; Typ.
 5/4 window casing per elevations

Railing system 42" min. above finished decking
 1x decking typ.


2x plates per SIP's manufacture
 Air sealing per SIP's manufacture

Typ. Floor Construction
 Top to bottom
 3/4" Finish floor
 3/4" Subfloor
 P.E. Trusses - See structural drawings for size and spacing
 3/4" Strapping
 1/2" Gyp. Bd.

45 deg. turn @ down pipe ends typ.
 8 1/4" SIP

2x8 P.T. Sill plate
 Sill sealer
 2" Rigid R-10
 Foundation wall per structural drawings

Typ. Slab Floor Construction
 Top to bottom
 4" Reinforced concrete slab (per structural drawings)
 4" Rigid insulation (R-20)
 Vapor Barrier
 Crushed stone
 Concrete footing per structural drawings

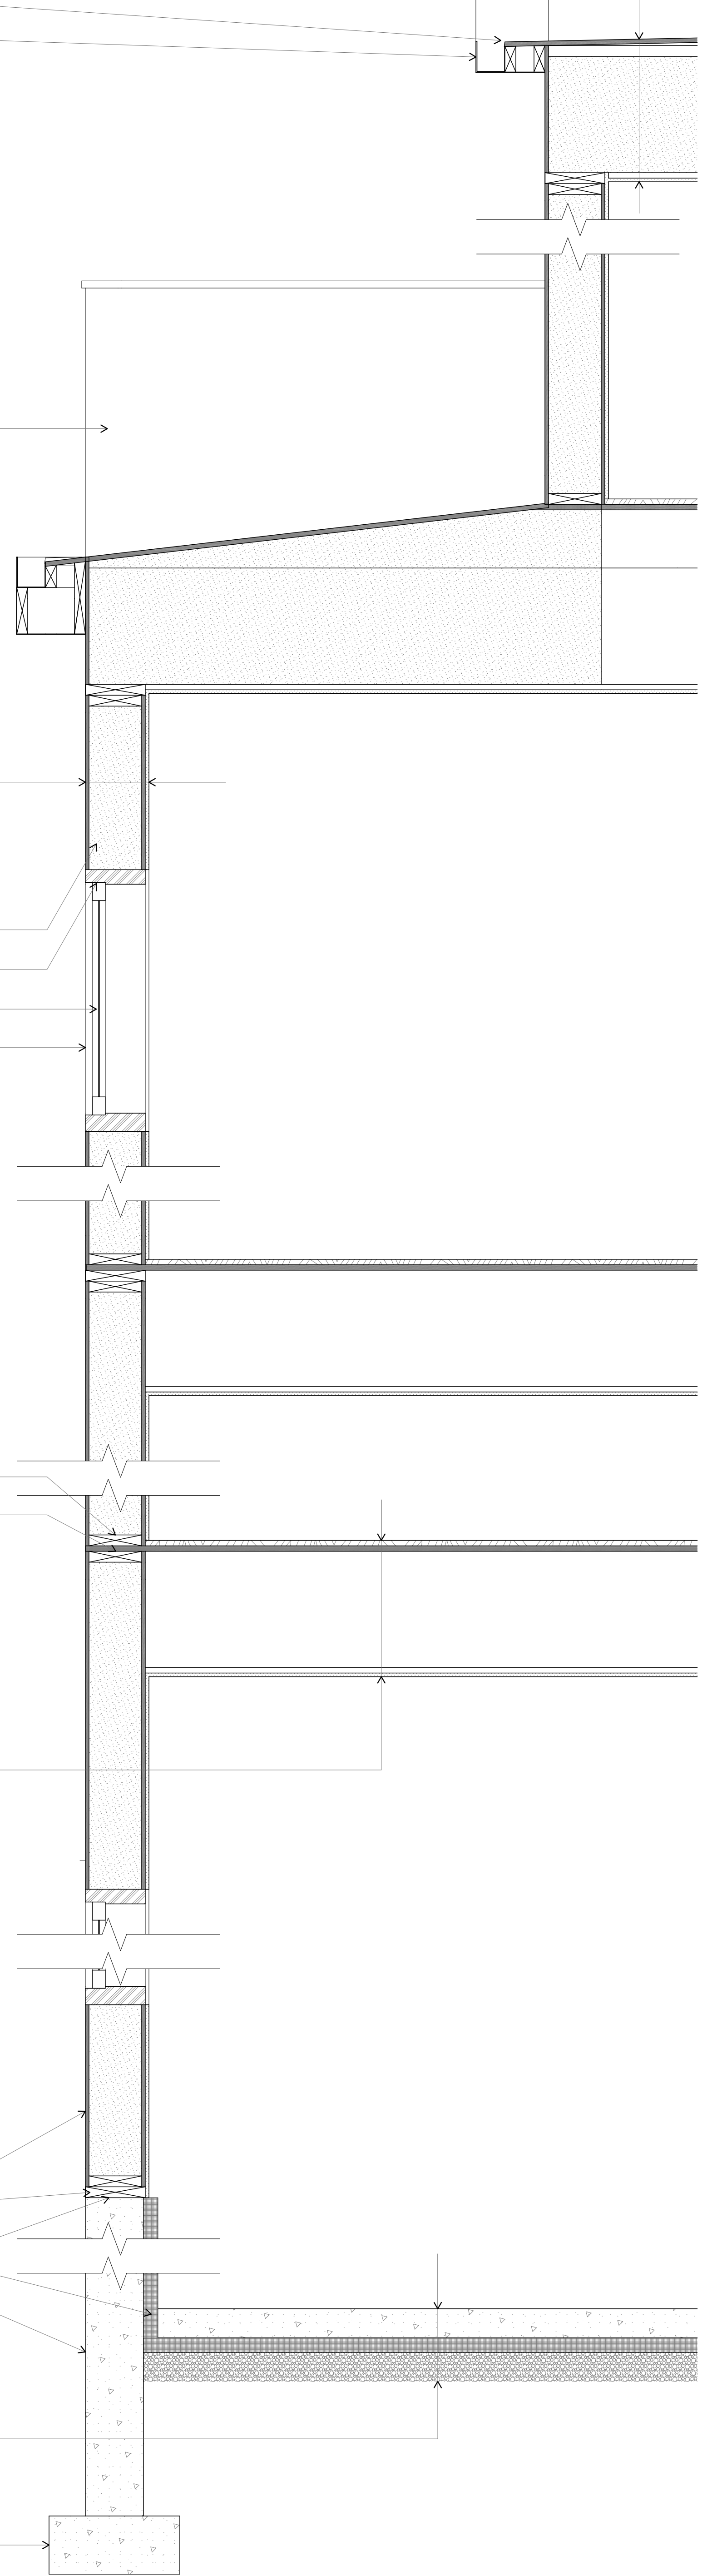

2 North West Perspective

2 Typical Wall Detail (1)