


DOOR SCHEDULE									
DOOR #	FROM	TO	SIZE	DOOR MATERIAL	DOOR TYPE	DOOR RATING	FRAME	HARDWARE SET	NOTES
001	EXTERIOR	STAIR 01	3'-0" X 7'-0"	INSUL ALUMN	3	-	ALUMN	04	1,2
002	STAIRCASE	BASEMENT	3'-0" X 7'-0"	HM	1	1.5 HRS	HM	05	-
003 TO 009	BASEMENT	STORAGE	3'-0" X 6'-8"	2X WD	1	-	2X WD	06	-
101, 201	STAIRCASE	UNIT ENTRANCE	3'-0" X 7'-0"	SOLID CORE	1	1.5 HRS	HM	01	-
102, 202	UNIT	BALCONY	5'-6" X 7'-0"	COMPOSITE	2	-	COMP	03	1
103, 203	UNIT	TOILET	3'-0" X 7'-0"	SOLID CORE	1	-	WD	02	-
104, 204	UNIT	BEDROOM	4'-3" X 6'-8"	WD	4	-	N/A	07	-
105	STAIRCASE	LOBBY	3'-0" X 7'-0"	SOLID CORE	1	1.5HRS	HM	05	-
106	LOBBY	EXTERIOR	3'-0" X 7'-0"	IA	3	-	ALUM	04	1,2
301, 401	STAIRCASE	UNIT ENTRANCE	3'-0" X 7'-0"	SOLID CORE	1	1.5 HRS	HM	01	-
302, 402	UNIT	BALCONY	5'-6" X 7'-0"	COMPOSITE	2	-	COMP	03	1
303, 403	UNIT	TOILET	2'-8" X 7'-0"	SOLID CORE	1	-	WD	02	1
304, 404	UNIT	BEDROOM	4'-3" X 6'-8"	WD	4	-	N/A	07	-
501, 601	STAIRCASE	UNIT ENTRANCE	3'-0" X 7'-0"	BY WIN MANUF	1	1.5 HRS	HM	01	-
502, 602	UNIT	BALCONY	5'-6" X 7'-0"	COMP	2	-	COMP	03	1
503, 603	UNIT	TOILET	2'-8" X 7'-0"	SOLID CORE	1	-	WD	02	-
504, 506	UNIT	BEDROOM	4'-3" X 6'-8"	WD	4	-	N/A	07	-
505, 507	BEDRROM	DECK	3'-0" x 7'-0"	COMPOSITE	3	-	COMP	03	1
604	STAIR 1	TERRACE	3'-0" x 7'-0"	HM	1	-	HM	04	2
605, 607	BATHROOM	BEDROOM	4'-3" X 6'-8"	WD	4	-	N/A	07	-
606	BATHROOM	SHOWER	4'-3" X 6'-8"	WD	4	-	N/A	07	-
608, 609	BEDROOM	ROOF DECK	5'-6" X 7'-0"	COMPOSITE	2	-	COMP	03	1

**DOOR TYPES**

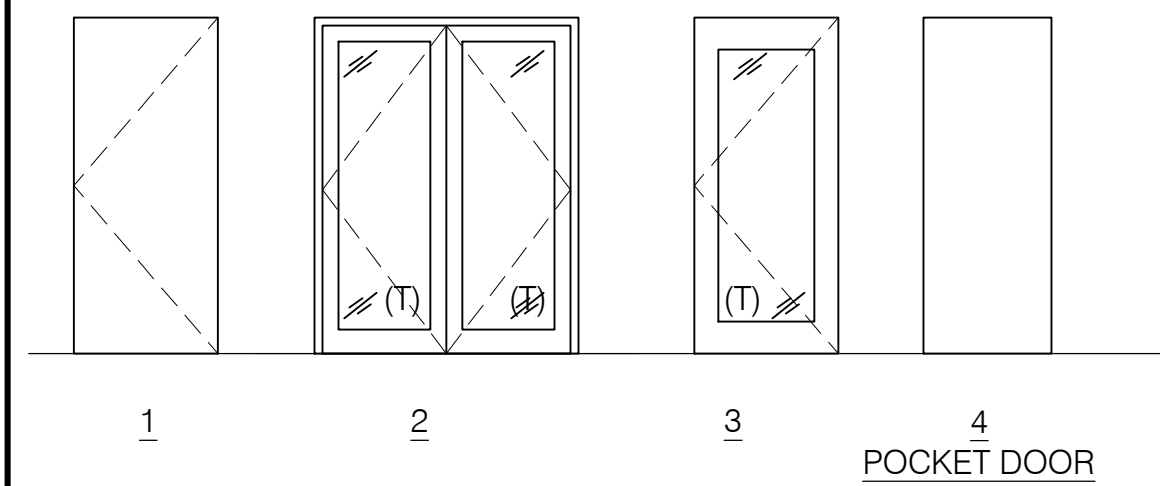

**GENERAL DOOR SCHEDULE NOTES:**

- ALL DOOR HANDLES TO BE ADA COMPLIANT LEVER HANDLES.
- ALL INTERIOR DOOR HARDWARE FINISH TBD
- DOORS WITHIN UNITS FINISH TBD
- PROVIDE A COMMON SPACES KEY FOR TENANT ENTRANCES AND STORAGE AREA (ISSUED TO EACH TENANT)

**HARDWARE SETS:**

- 01 UNIT ENTRY DOORS: PEEP HOLE, (3) HINGES, SOFT CLOSE DAMPER, STRIKE, DOOR STOP, SINGLE CYLINDER DEADBOLT, ENTRY LOCKSET, THROW-BOLT, LATCH ASSEMBLY, LEVER, CLOSER, THRESHOLD, SWEEP
- 02 BATHROOM DOORS: (3) HINGES, STRIKE, DOOR STOP, LEVER, BED/BATH LOCKSET
- 03 PATIO DOORS: (3) HINGES, ESCUTCHEON PLATE, HANDLE, DEADBOLT LOCKSET
- 04 ENTRY DOOR: (3) HINGES, STRIKE, DOOR STOP, THRESHOLD, SWEEP, ENTRY LOCKSET, GASKET, LEVER, METAL PROTECTIVE TRIM, CLOSER
- 05 STAIRWAY/HALLWAY DOOR (3) HINGES, SOFT CLOSE DAMPER, STRIKE, DOOR STOP, FREE PASSAGE LATCH ASSEMBLY, LEVER, CLOSER
- 06 STORAGE DOOR: (3) HINGES, PADLOCK HARDWARE
- 07 BARN DOORS: TRACK, COASTERS, DOOR GUIDE, DECORATIVE PULL

**DOOR SCHEDULE NOTES:**

1. SAFETY GLAZING
2. INSULATED
3. -
4. -
5. -
6. -

FINISH SCHEDULE											
UNIT #	ROOM	FLOOR	WALLS				BASE	CEILING	COUNTERTOP/BACKSPASH	NOTES	
			N	S	E	W					
-	STORAGE & BASEMENT	CONC	-	-	-	-	-	PT	-	1	
-	STAIR	CPT	PT	PT	PT	PT	RWB	PT	-	-	
1	STUDIO	VL	PT	PT	PT	PT	WD	PT	-	-	
1	BATHROOM	T	PT/T	PT/T	PT/T	PT/T	T	PT	C1	2	
1	KITCHEN	VL	PT	PT	PT	PT	WD	PT	C2	-	
2	STUDIO	VL	PT	PT	PT	PT	WD	PT	-	-	
2	BATHROOM	T	PT/T	PT/T	PT/T	PT/T	T	PT	C1	2	
2	KITCHEN	VL	PT	PT	PT	PT	WD	PT	C2	-	
3	STUDIO	VL	PT	PT	PT	PT	WD	PT	-	-	
3	BATHROOM	T	PT/T	PT/T	PT/T	PT/T	T	PT	C1	2	
3	KITCHEN	VL	PT	PT	PT	PT	WD	PT	C2	-	
4	STUDIO	VL	PT	PT	PT	PT	WD	PT	-	-	
4	BATHROOM	T	PT/T	PT/T	PT/T	PT/T	T	PT	C1	2	
4	KITCHEN	VL	PT	PT	PT	PT	WD	PT	C2	-	
5	STUDIO	VL	PT	PT	PT	PT	WD	PT	-	-	
5	BATHROOM	T	PT/T	PT/T	PT/T	PT/T	T	PT	C1	2	
5	KITCHEN	VL	PT	PT	PT	PT	WD	PT	C2	-	
6	STUDIO	VL	PT	PT	PT	PT	WD	PT	-	-	
6	BATHROOM	T	PT/T	PT/T	PT/T	PT/T	T	PT	C1	2	
6	KITCHEN	VL	PT	PT	PT	PT	WD	PT	C2	-	

**GENERAL FINISH SCHEDULE NOTES:**

- PAINT SHEENS TO BE AS FOLLOWS
- WALLS: EGG SHELL SATIN FINISH
- CEILINGS: FLAT
- TRIM: SEMI-GLOSS

**SPECIFIC FINISH SCHEDULE NOTES:**

1. ANY EXPOSED DRYWALL IN BASEMENT TO BE PAINTED ACCORDING TO GENERAL NOTE #1.
2. SHOWERS TO BE TILE WALLS. SHOWER BASE TO BE SPECIFIED BY DEVELOPER.
3. -
4. -
5. -

**LEGEND:**

CODE:	MATERIAL:	SPECIFICATION BY DEVELOPER:
CONC	CONCRETE	_____
PT	PAINT	_____
CPT	CARPET	_____
T	TILE	_____
C-1	BATH COUNTERTOP	_____
C-2	KITCHEN COUNTERTOP	_____
RWB	RUBBER WALL BASE	_____
VL	ENGINEERED VINYL PLANK	_____
WD	WOOD	_____

**KITCHEN APPLIANCES**

